




AS-Interface value-added automation set for pneumatic quarter-turn actuators

Added Value package AS-i T5

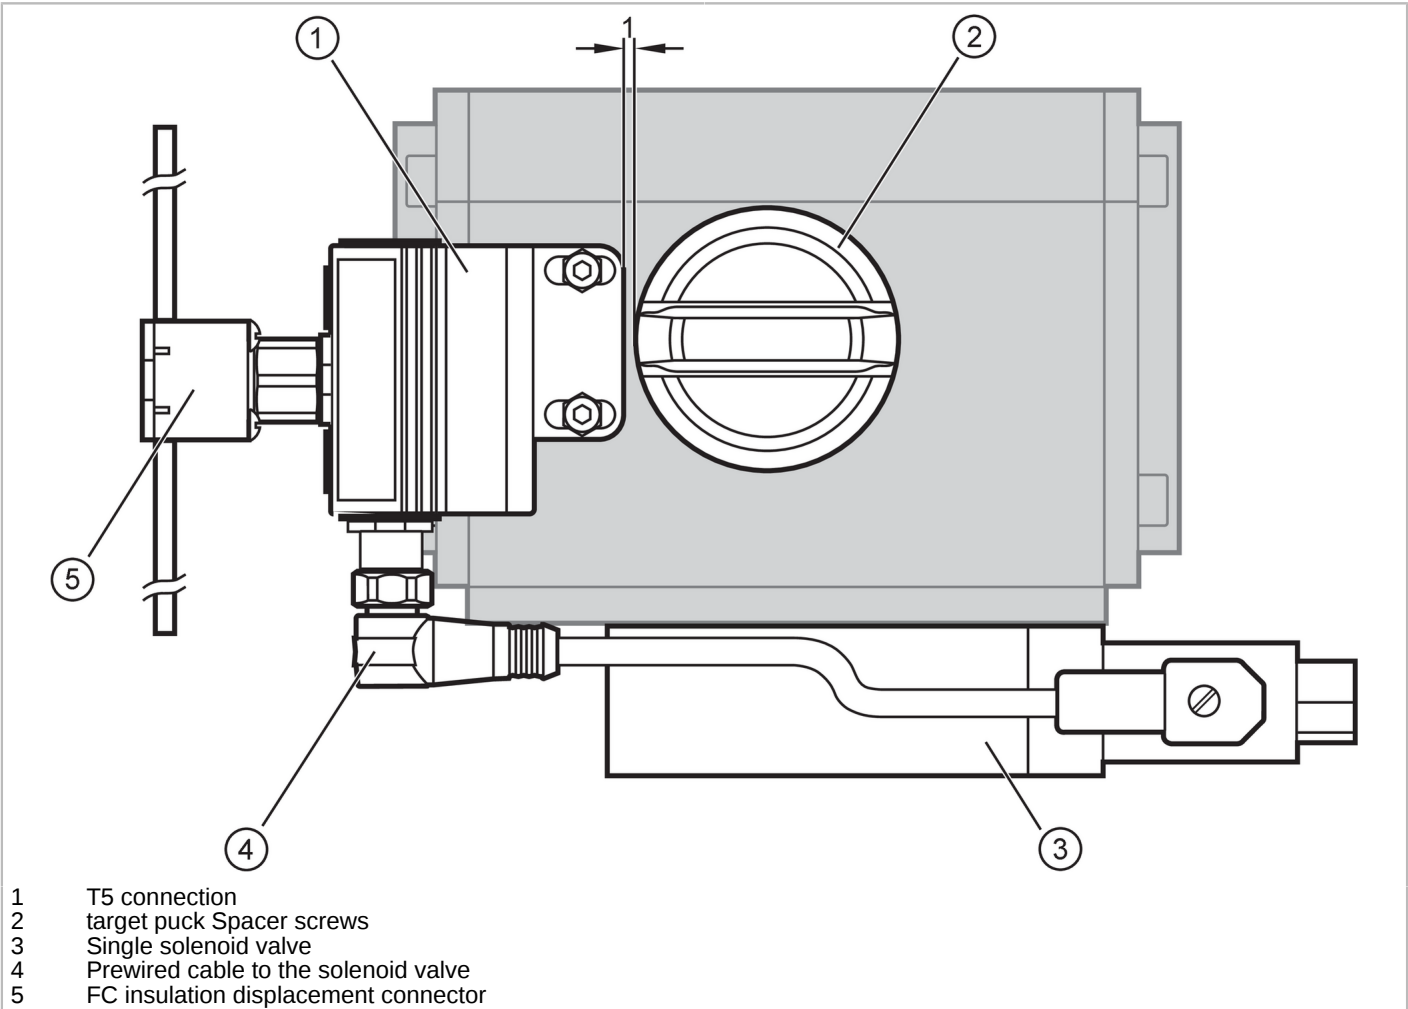

Product characteristics	
Output function	PNP
Application	
Application	direct open and close valve control
Components	Dual sensor for actuator feedback: 1, AC2316
	Spacer: 1, E12526
	Target puck: 1, E12517
	Flat cable insulation displacement connector: 1, E75471
	5/2-way solenoid valve adjustable to 3/2-way solenoid valve: 1, ZJF184
	Patchcords with valve plug: 1, EVM120
Electrical data	
Max. current consumption from AS-i	[mA] 160
Operating voltage AUX DC	[V] 26.5...31.6; (cULus - Class 2 source required)
Inputs / outputs	
Number of inputs and outputs	Number of digital inputs: 2; Number of digital outputs: 1
Inputs	
Number of digital inputs	2
Outputs	
Number of digital outputs	1



AS-Interface value-added automation set for pneumatic quarter-turn actuators

Added Value package AS-i T5

Output function	PNP
AS-i classification	
AS-i version	2.1
AS-i profile	S-7.A.E
AS-i I/O configuration [hex]	7
AS-i ID code [hex]	A.E
Mechanical data	
Weight [g]	1056.5
Mounting	non-flush mountable
Hole spacing [mm]	80
Shaft height of actuator stem [mm]	20
Remarks	
Pack quantity	1 pcs.
Electrical connection	
Electrical connection - Socket	
Connector: 1 x M12; coding: A; Contacts: 2	
Outputs	
3	External voltage -
4	Switching output 1 +
Electrical connection - plug	
Connector: 1 x M12; coding: A; Contacts: 4	
Connection	
Connection	
1	AS-i +
3	AS-i -