


Added Value package AS-i T5

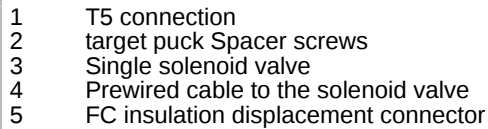

Output function	PNP
-----------------	-----

Output function	PNP
-----------------	-----

Application	direct open and close valve control
-------------	-------------------------------------

Application	direct open and close valve control
-------------	-------------------------------------

Components	Dual sensor for actuator feedback: 1, AC2316
------------	--

Target puck: 1, E17328

	Flat cable insulation displacement connector: 1, E75471
--	---

	5/2-way solenoid valve adjustable to 3/2-way solenoid valve: 1, ZJF184
--	--

	Patchcords with valve plug: 1, EVM121
--	---------------------------------------

Max. current consumption	[mA]	160
--------------------------	------	-----

Max. current consumption	[mA]	160
--------------------------	------	-----

from AS-i	100
-----------	-----

Operating voltage AUX DC [V]	26.5...31.6; (cULus - Class 2 source required)
------------------------------	--

Number of inputs and outputs	Number of digital inputs: 2; Number of digital outputs: 1
------------------------------	---

Number of inputs and outputs	Number of digital inputs: 2; Number of digital outputs: 1
------------------------------	---

Number of digital inputs	2
--------------------------	---

Number of digital inputs	2
--------------------------	---

Number of digital outputs	1
---------------------------	---


Number of digital outputs	1
---------------------------	---

Output function	PNP
-----------------	-----



AS-Interface value-added automation set for pneumatic quarter-turn actuators

Added Value package AS-i T5

AS-i classification		
AS-i version		2.1
AS-i profile		S-7.A.E
AS-i I/O configuration	[hex]	7
AS-i ID code	[hex]	A.E
Mechanical data		
Weight	[g]	1098.5
Mounting		non-flush mountable
Hole spacing	[mm]	130
Shaft height of actuator stem	[mm]	30
Remarks		
Pack quantity		1 pcs.
Electrical connection - Socket		
Connector: 1 x M12; coding: A; Contacts: 3		
		
Outputs		
3	External voltage -	
4	Switching output 1 +	
Electrical connection - plug		
Connector: 1 x M12; coding: A; Contacts: 4		
		
Connection		
Connection		
1	AS-i +	
3	AS-i -	