




AS-Interface diagnosis module

AS-i Tuner IP67

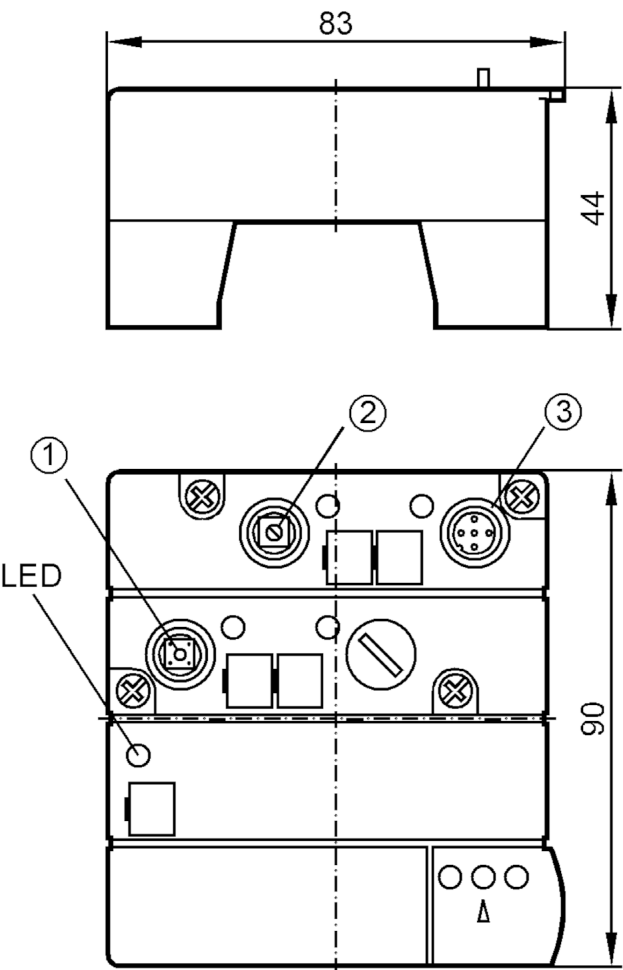

- 1 tune button
- 2 Rotary switch
- 3 AS-i distribution socket M12



Application		
Application		diagnostic tool for AS-i
Electrical data		
Nominal voltage DC	[V]	26.5...31.6
Max. current consumption from AS-i	[mA]	60
Reverse polarity protection		yes
Undervoltage monitor		yes
Operating conditions		
Ambient temperature	[°C]	0...55
Protection		IP 67
Tests / approvals		
MTTF	[years]	140
Mechanical data		
Weight	[g]	199.2

AC1146



AS-Interface diagnosis module

AS-i Tuner IP67

Housing	rectangular
Dimensions [mm]	83 x 90 x 44
Material	housing: PBT

Displays / operating elements

Display	Power	LED, green
	warning	LED, yellow
	errors	LED, red

Accessories

Accessories (optional)	Module lower part:, AC5000
------------------------	----------------------------


Remarks

Remarks	no addressing required
	Current rating of the AS-i distribution socket max. 1 A
Pack quantity	1 pcs.

Electrical connection

contact pins to module lower part, FK:

Connector: M12; coding: A



	AS-i distribution socket M12
1	AS-i +
3	AS-i -