


DD2503



Evaluation unit for speed monitoring

MONITOR/FR-1 /110-240VAC/DC

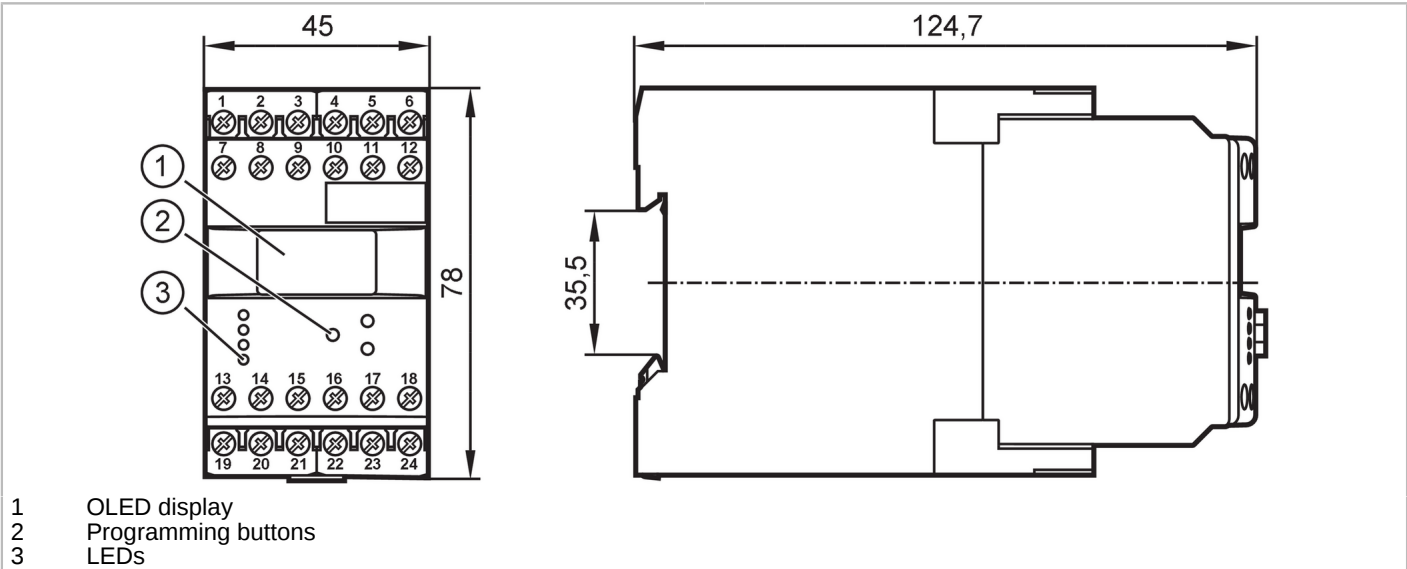

Product characteristics

Housing	rectangular
Dimensions [mm]	78 x 45 x 124.7

Application

Design	housing for DIN rail mounting
Application	pulse evaluation system with microprocessor for frequency; rotational speed; speed; pulses and machine cycles

Electrical data

Nominal voltage AC [V]	110...240
Nominal voltage DC [V]	27
Nominal voltage tolerance [%]	< 10
Nominal voltage tolerance 2 [%]	20...10
Nominal frequency AC [Hz]	50...60
Power consumption [W]	3
Auxiliary energy for sensors DC [V]	19.6...27.7; (SELV, ≤ 15 mA)

Inputs / outputs

Number of inputs and outputs	Number of analog outputs: 1; Number of relay outputs: 2
------------------------------	---

Outputs

Number of relay outputs	2
Contact rating	6 A (250 V AC, 30 V DC); B300, R300; (resistive load)
Number of analog outputs	1
Analog current output [mA]	4...20
Max. load [Ω]	500; (Min. load: 20 [Ω])

Measuring/setting range

Setting range Hz [Hz]	0.1...1000
Setting range [Imp/min]	1...60000



Evaluation unit for speed monitoring

MONITOR/FR-1 /110-240VAC/DC

Operating conditions		
Ambient temperature	[°C]	-40...60
Storage temperature	[°C]	-40...85
Max. relative air humidity	[%]	80; (40 °C: 50 %)
Protection		IP 50
Protection rating terminals		IP 20
Pollution degree		2
Tests / approvals		
EMC	EN 61010	2011
	EMV 89/336/EWG	
	EN 61000-6-2	2005
	EN 61000-6-4	2007
MTTF	[years]	152
Mechanical data		
Weight	[g]	381.5
Housing		rectangular
Type of mounting		Mounting on DIN rail; (TH35 (EN 60715))
Dimensions	[mm]	78 x 45 x 124.7
Material		housing: plastics
Displays / operating elements		
Display		OLED display, 128 x 64 pixels luminous
	Switching status	LED, green
Remarks		
Remarks		the device complies with overvoltage category II
Pack quantity		1 pcs.

**Evaluation unit for speed monitoring**

MONITOR/FR-1 /110-240VAC/DC

Electrical connectiondual-chamber terminals: 2 x ...2.5 mm²; AWG 14

1	DC Supply voltage (L-)
2	DC Supply voltage (L+)
3	Supply transistor outputs (L+)
4	sensor signal pnp
5	DC Sensor supply (L+)
6	DC Sensor supply (L-)
7	AC Supply voltage (L)
8	AC Supply voltage (N)
9	not used
10	sensor signal npn
11	not used
12	not used
13	Relay 1 common
14	Relay 1 normally open
15	Relay 1 normally closed
16	transistor output 1 pnp
17	Reset 1 pnp
18	Reset 2 pnp
19	Relay 2 common
20	Relay 2 normally open
21	Relay 2 normally closed
22	analog output (+)
23	analog output (-)
24	transistor output 2 pnp