




Inductive sensor

IGA3008-BPKG/V4A/10-55V/10M

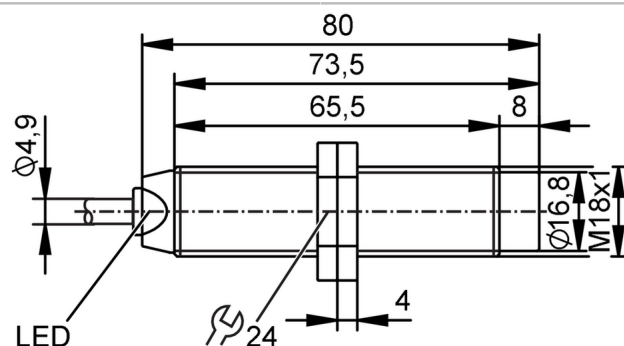

Product characteristics

Electrical design	PNP
Output function	normally open
Sensing range [mm]	8
Housing	Threaded type
Dimensions [mm]	M18 x 1 / L = 80

Electrical data

Operating voltage [V]	10...55 DC
Current consumption [mA]	15
Protection class	II
Reverse polarity protection	yes

Outputs

Electrical design	PNP
Output function	normally open
Max. voltage drop switching output DC [V]	2.5
Permanent current rating of switching output DC [mA]	250
Switching frequency DC [Hz]	300
Short-circuit protection	yes
Type of short-circuit protection	yes (non-latching)
Overload protection	yes

Monitoring range

Sensing range [mm]	8
Real sensing range Sr [mm]	$8 \pm 10\%$
Operating distance [mm]	0...6.5

Accuracy / deviations

Correction factor	steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminum: 0.3 / copper: 0.2
Hysteresis [% of Sr]	1...15
Switch-point drift [% of Sr]	-10...10

Operating conditions

Ambient temperature [°C]	-25...80
--------------------------	----------

IG5606



Inductive sensor

IGA3008-BPKG/V4A/10-55V/10M

Protection	IP 67
------------	-------

Tests / approvals

EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	10 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-6 HF conducted	10 V
	EN 55011	class B
MTTF	[years]	1719

Mechanical data

Weight	[g]	522.5
Housing		Threaded type
Mounting		non-flush mountable
Dimensions	[mm]	M18 x 1 / L = 80
Thread designation		M18 x 1
Material		housing: stainless steel (1.4571/316Ti); sensing face: PBT orange; end cap: PC; lock nuts: stainless steel (1.4404 / 316L)

Displays / operating elements

Display	Switching status	1 x LED, yellow
---------	------------------	-----------------

Accessories

Items supplied	lock nuts: 2
----------------	--------------


Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Cable: 10 m, PVC; 3 x 0.5 mm²

Connection

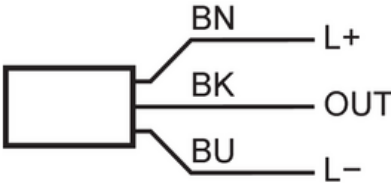

Core colors :		
BN =	brown	
BU =	blue	
BK =	black	
BN	L+	
BK	OUT	DO (NO)
BU	L-	
DO: digital output; NO: normally open		