




Through-beam sensor receiver

O6E-FNKG/0,30m/US

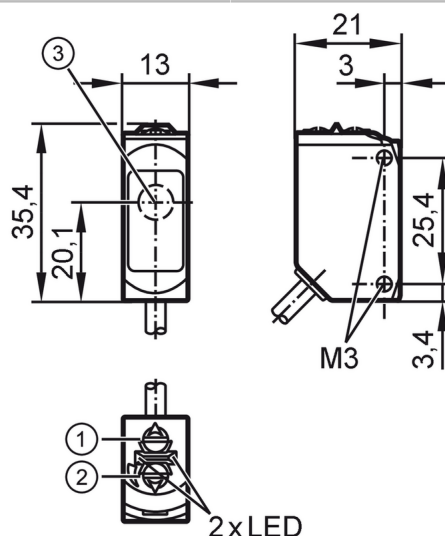

- 1 output function switch
2 potentiometer sensitivity
3 Light incidence



Product characteristics

Type of light	red light
Housing	rectangular

Application

Function principle	Through-beam sensor
Application	Industrial applications

Electrical data

Operating voltage	[V]	10...30 DC
Current consumption	[mA]	7; ((24 V))
Protection class		III
Reverse polarity protection		yes
Type of light		red light
Wave length	[nm]	633

Outputs

Electrical design		NPN
Output function		light-on/dark-on mode; (selectable)
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	100
Switching frequency DC	[Hz]	1000
Short-circuit protection		yes
Type of short-circuit protection		yes (non-latching)

Monitoring range

Transmitter / receiver		receiver
Range	[m]	< 10

O6E205



Through-beam sensor receiver

O6E-FNKG/0,30m/US

Range adjustable	yes
------------------	-----

Operating conditions

Ambient temperature	[°C]	-25...60
Protection		IP 65; IP 67

Tests / approvals

EMC	EN 60947-5-2	
MTTF	[years]	956
UL approval	Ta	-25...50 °C
	Enclosure type	Type 1
	voltage supply	Class 2
	UL approval number	E012

Mechanical data

Weight	[g]	32.9
Housing		rectangular
Dimensions	[mm]	35.4 x 13 x 21
Material		housing: ABS orange; upper part of the housing: PPSU black; sealing: EPDM
Lens material		front lens:PMMA
Lens alignment		Side sensing
Tightening torque	[Nm]	0.5

Displays / operating elements

Display	Switching status	1 x LED, yellow
	Power	1 x LED, green

Remarks

Remarks	cULus - Class 2 source required
Pack quantity	1 pcs.


Electrical connection

Cable: 0.3 m, PUR; 3 x 0.25 mm²

Connector: 1 x M12; coding: A; Contacts: 4



Connection

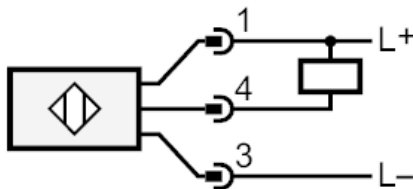

O6E205




Through-beam sensor receiver

O6E-FNKG/0,30m/US

Diagrams and graphs

excess gain graph

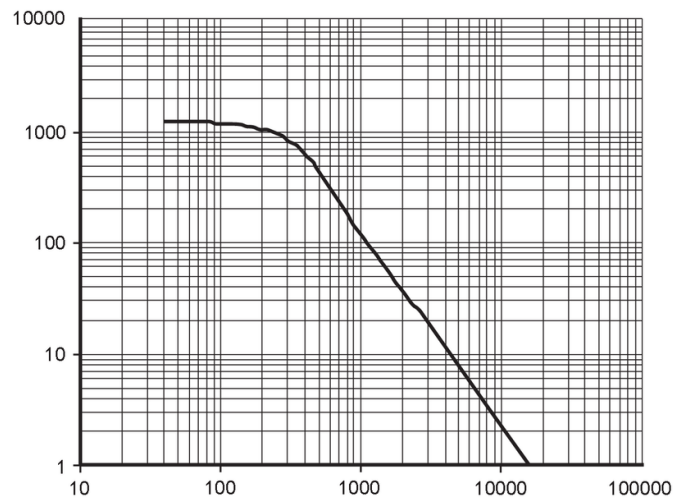

x: distance [mm]

y: excess gain factor