


AS-Interface control cabinet module

SmartLine25 4DI 3DO T C

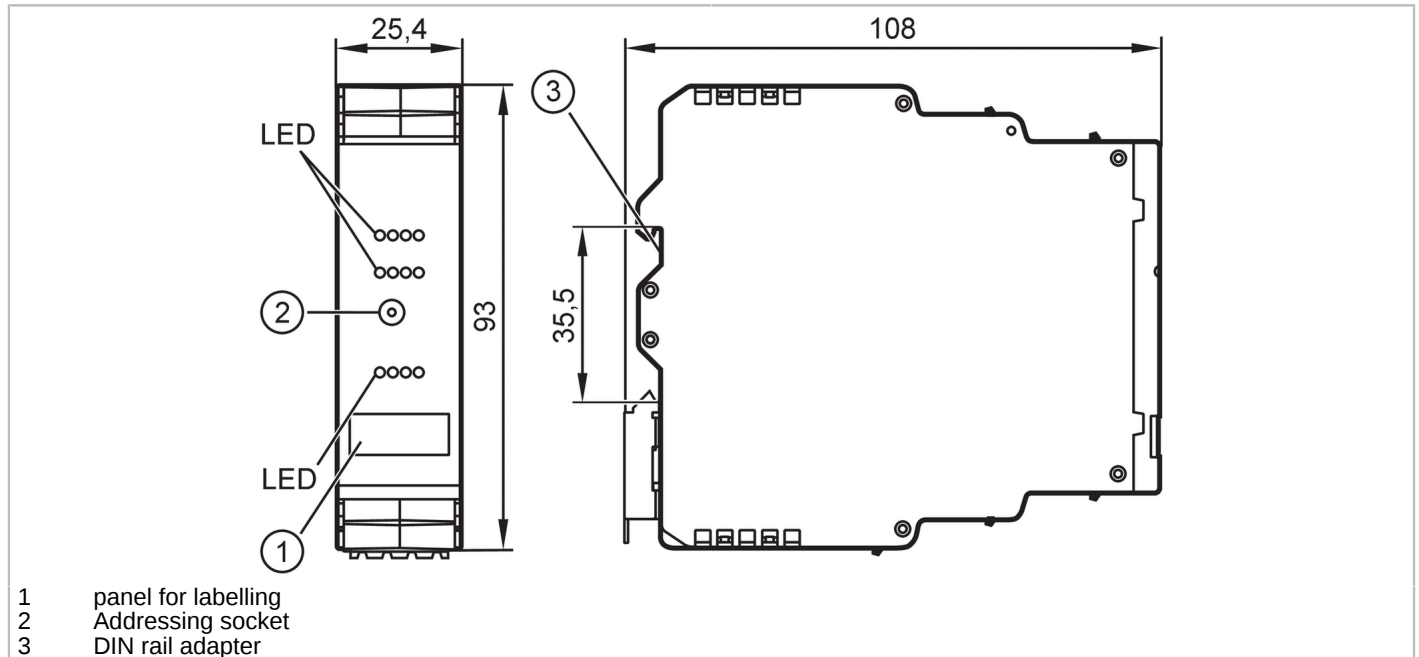

Application

Design	housing for DIN rail mounting
Application	I/O modules for control cabinet installations

Electrical data

Operating voltage	[V]	26.5...31.6 DC
Max. current consumption from AS-i	[mA]	250
Additional voltage supply	[V]	20...30 DC
Max. current consumption from additional supply	[mA]	3000; (AUX)
Integrated watchdog		yes

Inputs / outputs

Number of inputs and outputs	Number of digital inputs: 4; Number of digital outputs: 3
------------------------------	---

Inputs

Number of digital inputs	4
Input circuit of digital inputs	PNP; (type 2 according to IEC 61131-2)
Sensor supply of the inputs	AS-i
Voltage supply [V]	18...30; (DC)
Max. total current rating of inputs [mA]	200
Input current High [mA]	6...10
Input current low [mA]	0...2
Switching level high [V]	> 11
Digital inputs protected against short circuits	yes



AS-Interface control cabinet module

SmartLine25 4DI 3DO T C

Outputs					
Number of digital outputs	3				
Circuit	PNP				
Voltage range DC [V]	20...30; (AUX)				
Max. current load per output [mA]	1000; (utilization category DC-12: 700 mA; utilization category DC-13 (control of electromagnets): 20 W (IEC 60947-5-1))				
Max. current load outputs total [A]	3				
Short-circuit proof	yes				
Electrically separated	yes				
Actuator supply outputs	AUX				
Operating conditions					
Ambient temperature [°C]	-25...70				
Note on ambient temperature	the derating of the current load indicated in the operating instructions is to be taken into account at the following ambient temperature: > 60 °C				
Max. relative air humidity [%]	90; (non condensing)				
Max. height above sea level [m]	2000				
Protection	IP 20				
Pollution degree	2				
Tests / approvals					
EMC	EN 61000-6-2				
	EN 62026-2				
	EN 50581				
MTTF [years]	182				
Notes	The device shall be supplied from an isolating source.; This voltage source must have a secondary UL-listed fuse (see enclosed sheet).; Alternatively, a class 2 power supply can be used to supply AUX.				
AS-i classification					
AS-i version	2.11; 3.0				
AS-i addressing	Addressing socket				
Extended addressing mode	yes				
AS-i master profile	M2; M3; M4				
AS-i profile	S-7.A.E				
AS-i I/O configuration [hex]	7				
AS-i ID code [hex]	A.E				
AS-i certificate	60701				
Data bits	Data bit	D0	D1	D2	D3
	Input	I-1	I-2	I-3	I-4
	Output	O-1	O-2	O-3	-
Mechanical data					
Weight [g]	146				
Housing	rectangular				
Type of mounting	Mounting on DIN rail; (TH35 (EN 60715))				
Dimensions [mm]	93 x 25.4 x 108				
Material	PC-GF20				



AS-Interface control cabinet module

SmartLine25 4DI 3DO T C

Displays / operating elements

Display	Switching status	LED, yellow I1...I4, O1....O3
	Power	LED, green AS-i, AUX
	errors	LED, red

Accessories

Accessories (optional)	connector
------------------------	-----------

Remarks

Remarks	Do not connect any of the following points to an external potential:
	I-, I+, I1, I2, I3, I4
	The connections are electrically connected with the AS-i cable.
Pack quantity	1 pcs.

Electrical connection

pin header:

Connection

I-	I-	I-	I-
I1	I2	I3	I4
I+	I+	I+	I+

O-	O-	O-	O-
O1	O2	O3	
A+	A-	E+	E-

A+	AS-i +
A-	AS-i -
I+	Sensor supply +24V
I-	Sensor supply 0V
E+	Actuator supply +24V
E-	Actuator supply 0V
I1...I4	Switching input sensor 1...4
O1...O3	Switching output actuator 1...3
O-	Switching output actuator 0V