




Retro-reflective sensor

OJP-FPKG/SO

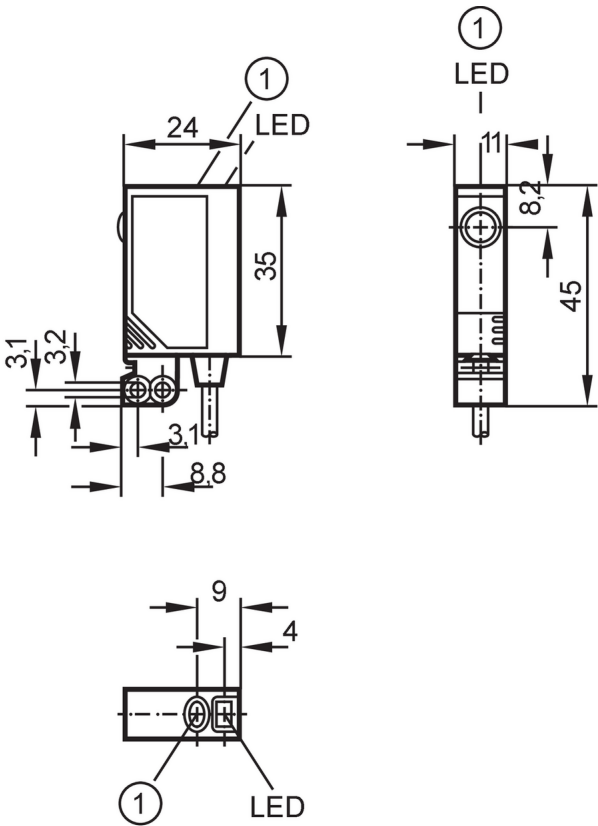

1 pushbutton



Product characteristics		
Type of light		red light
Housing		rectangular
Application		
Special feature		polarization filter
Function principle		Retro-reflective sensor
Application		Industrial applications
Electrical data		
Operating voltage	[V]	10...30 DC
Current consumption	[mA]	< 22
Protection class		III
Reverse polarity protection		yes
Type of light		red light
Wave length	[nm]	660
Outputs		
Electrical design		PNP
Output function		light-on/dark-on mode; (programmable)
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	200



Retro-reflective sensor

OJP-FPKG/SO

Switching frequency DC	[Hz]	2000
Short-circuit protection		yes
Type of short-circuit protection		yes (non-latching)
Overload protection		yes
Monitoring range		
Range referred to prismatic reflector	[m]	0...2; (Prismatic reflector Ø 80 E20005)
Range adjustable		yes
Max. light spot diameter	[mm]	64
Light spot dimensions refer to		at maximum range
Polarization filter available		yes
Operating conditions		
Ambient temperature	[°C]	-25...60
Protection		IP 67
Tests / approvals		
EMC		EN 60947-5-2
MTTF	[years]	854
Mechanical data		
Weight	[g]	73.7
Housing		rectangular
Dimensions	[mm]	35 x 11 x 24
Material		housing: ABS; fixture: diecast zinc; LED window: SEPS; pushbutton: SEPS
Lens material		front lens: glass
Lens alignment		Side sensing
Displays / operating elements		
Display	Switching status	1 x LED, yellow
	Power	1 x LED, green
	Function	1 x LED, red
Electronic lock		yes
Accessories		
Items supplied		screws: 2 x (M3 x 16 mm)
		Basic clip: 1, E20964
		spring washers: 2
		Nuts: 2
Remarks		
Remarks		cULus - Class 2 source required
Pack quantity		1 pcs.

OJ5028




Retro-reflective sensor

OJP-FPKG/SO

Electrical connection

Cable: 2 m, PVC; 4 x 0.14 mm²

Connection

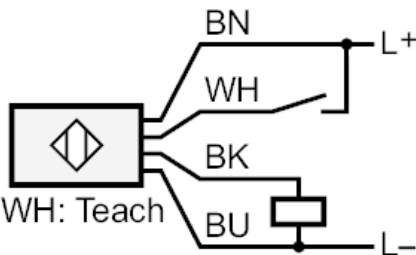

- | | |
|------|---------------|
| | Core colors : |
| BK = | black |
| BN = | brown |
| BU = | blue |
| WH = | white |

Diagrams and graphs

excess gain graph

