




AS-Interface illuminated pushbutton module

AS-i Module 2BI 2LO WT/WT

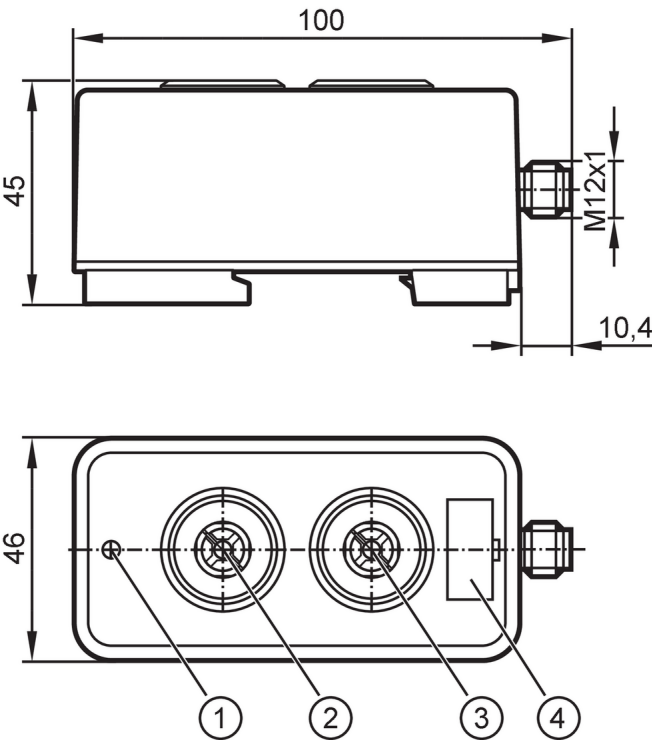

- 1 LED
- 2 pushbuttons 2 / LED 2
- 3 pushbuttons 1 / LED 1
- 4 panel for labelling



Application		
Design	housing for DIN rail mounting, Color inserts changeable	
Application	field installation	
Electrical data		
Operating voltage	[V]	26.5...31.6 DC
Max. current consumption from AS-i	[mA]	55
Inputs		
Sensor supply of the inputs	AS-i	
Operating conditions		
Ambient temperature	[°C]	-25...60
Storage temperature	[°C]	-40...85
Protection	IP 67	
Tests / approvals		
EMC	EN 61000-6-2	
	EN 62026-2	
UL approval	Enclosure type	Type 1
	voltage supply	Class 2
	File number UL	E205959
AS-i classification		
AS-i version	2.11; 3.0	



AS-Interface illuminated pushbutton module

AS-i Module 2BI 2LO WT/WT

Extended addressing mode	yes				
AS-i master profile	M2; M3; M4				
AS-i profile	S-7.A.E				
AS-i I/O configuration [hex]	7				
AS-i ID code [hex]	A.E				
AS-i certificate	133801				
Data bits	Data bit	D0	D1	D2	D3
	LED 1	DO-0	-	-	-
	LED 2	-	DO-1	-	-
	pushbuttons 1	DI-0	-	-	-
	pushbuttons 2	-	DI-1	-	-

Mechanical data

Weight [g]	140
Housing	rectangular
Type of mounting	Mounting on DIN rail; (TH35 (EN 60715))
Dimensions [mm]	100 x 46 x 45
Material	PA

Displays / operating elements

Display	Power	LED, green
	errors	LED, red
Operating elements	2	freely programmable backlit function keys

Electrical connection

Module connection	M12
-------------------	-----

Accessories

Items supplied	cover support: 2
	color inserts: 2, red
	2, green
	2, yellow
	2, blue
	2, white

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Connector: M12; coding: A; Contacts: 2



1	AS-i +
3	AS-i -