




Retro-reflective sensor

OJP-FPKG/FO/0,15M/US

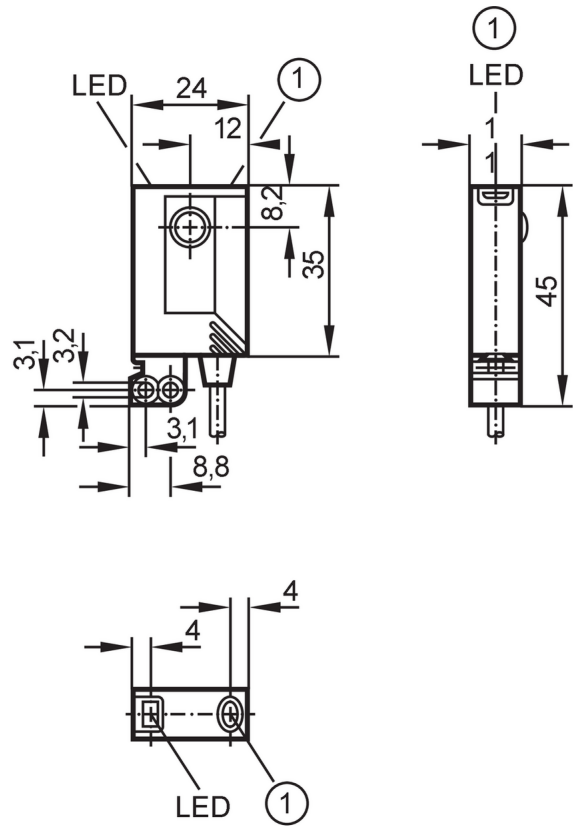

1 Pushbutton without function



Product characteristics		
Type of light		red light
Housing		rectangular
Application		
Special feature		gold-plated contacts; polarization filter
Function principle		Retro-reflective sensor
Application		Industrial applications
Electrical data		
Operating voltage	[V]	10...30 DC
Current consumption	[mA]	< 22
Protection class		III
Reverse polarity protection		yes
Type of light		red light
Wave length	[nm]	660
Outputs		
Electrical design		PNP
Output function		light-on/dark-on mode; (programmable)
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	200



Retro-reflective sensor

OJP-FPKG/FO/0,15M/US

Switching frequency DC	[Hz]	2000
Short-circuit protection		yes
Type of short-circuit protection		yes (non-latching)
Overload protection		yes

Monitoring range

Range referred to prismatic reflector	[m]	0...2; (Prismatic reflector Ø 80 E20005)
Range adjustable		yes
Max. light spot diameter	[mm]	64
Light spot dimensions refer to		at maximum range
Polarization filter available		yes

Operating conditions

Ambient temperature	[°C]	-25...60
Protection		IP 67

Tests / approvals

EMC		EN 60947-5-2
MTTF	[years]	867

Mechanical data

Weight	[g]	54.3
Housing		rectangular
Dimensions	[mm]	35 x 24 x 11
Material		housing: ABS; fixture: diecast zinc; LED window: SEPS; pushbutton: SEPS
Lens material		front lens: glass
Lens alignment		Front sensing

Displays / operating elements

Display	Switching status	1 x LED, yellow
	Power	1 x LED, green
	Function	1 x LED, red
Electronic lock		yes

Accessories

Items supplied	Basic clip: 1, E20964
	screws: 2 x (M3 x 16 mm)
	spring washers: 2
	Nuts: 2

Remarks

Remarks	cULus - Class 2 source required
Pack quantity	1 pcs.

Electrical connection

Cable: 0.15 m, PUR

Connector: 1 x M12; coding: A; Contacts: 4, gold-plated; Moulded body: Hytrel 8068; Locking: stainless steel (1.4404 / 316L)






Retro-reflective sensor

OJP-FPKG/FO/0,15M/US

Connection

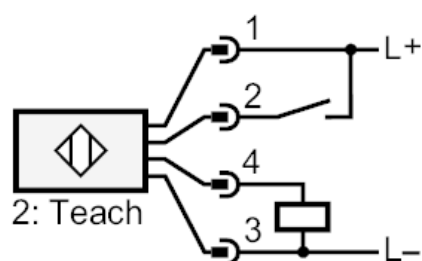

2 Teach

Diagrams and graphs

excess gain graph

