




AS-Interface control cabinet module

SmartL25 4 AO (C) C IP20

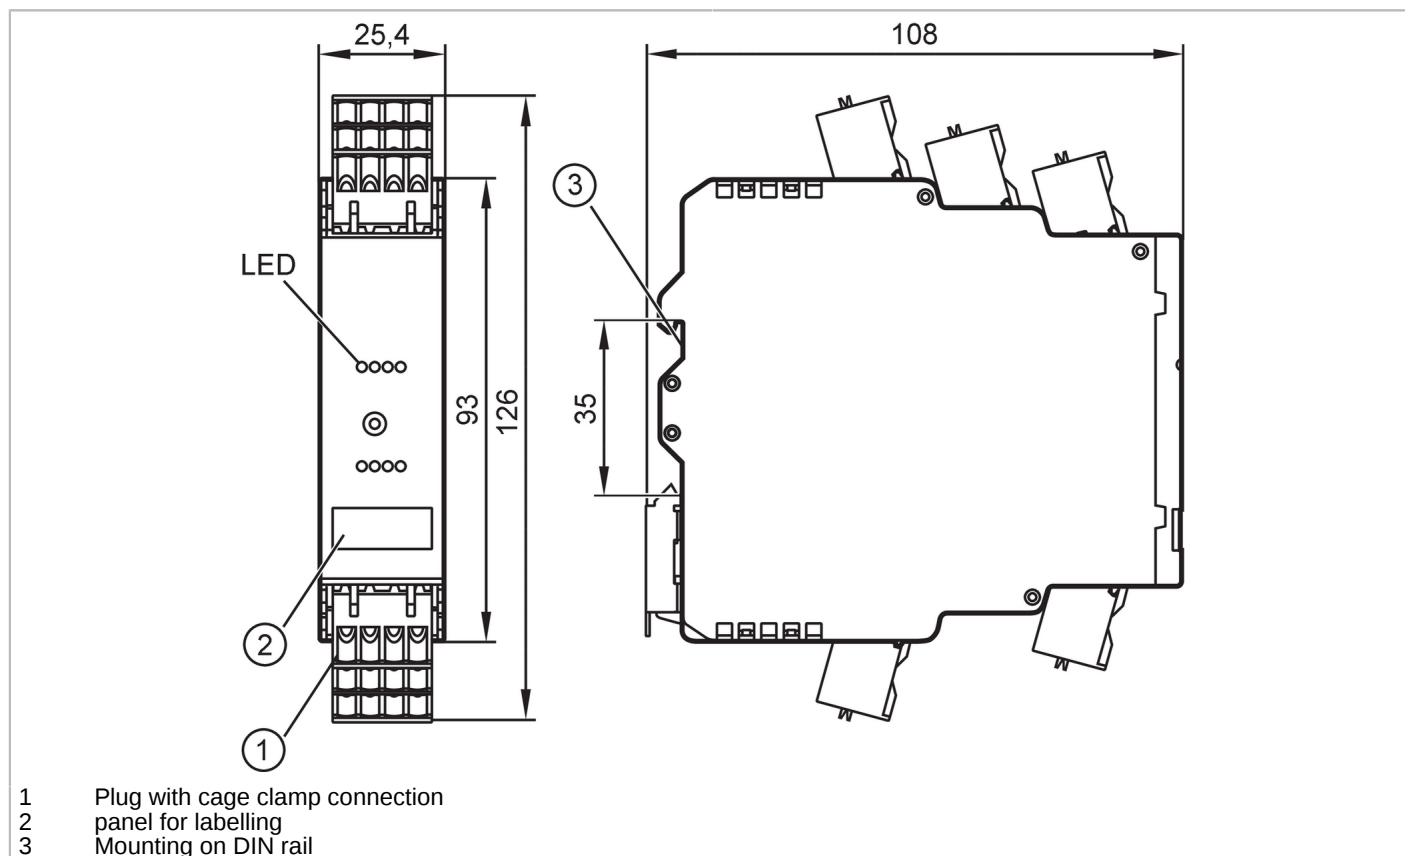

Application

Design	housing for DIN rail mounting
Application	I/O modules for control cabinet installations

Electrical data

Operating voltage [V]	26.5...31.6 DC
Max. current consumption from AS-i [mA]	157
Reverse polarity protection	yes
Additional voltage supply [V]	20...30 DC; (AUX)
Additional voltage supply	optional
Max. current consumption from additional supply [mA]	550; (AUX)

Inputs / outputs

Number of inputs and outputs	Number of analog outputs: 4
------------------------------	-----------------------------

Outputs

Number of analog outputs	4; (connection of 2-wire or 4-wire actuator)
Analog current output [mA]	0...20
Max. load [Ω]	600
Max. voltage drop across load for nominal current [V]	10
Overload protection	yes
Resolution of analog output	16 (1 bit = 1 μ A)



AS-Interface control cabinet module

SmartL25 4 AO (C) C IP20

Actuator supply outputs		AS-i / AUX	
Operating conditions			
Ambient temperature	[°C]	0...70	
Storage temperature	[°C]	-25...75	
Max. relative air humidity	[%]	90; (non condensing)	
Max. height above sea level	[m]	2000	
Protection		IP 20	
Protection rating terminals		IP 20	
Pollution degree		2	
Tests / approvals			
EMC		EN 61000-6-2	
		EN 61000-6-4	
UL approval		voltage supply	Class 2
AS-i classification			
AS-i version		2.11; 3.0	
AS-i addressing		Addressing socket	
Extended addressing mode		no	
AS-i master profile		M3; M4	
AS-i profile		S-7.3.6	
AS-i I/O configuration	[hex]	7	
AS-i ID code	[hex]	3.6	
Mechanical data			
Weight	[g]	202.1	
Housing		rectangular	
Type of mounting		Mounting on DIN rail; (TH35 (EN 60715))	
Dimensions	[mm]	126 x 25.4 x 108	
Material		PC-GF20	
Displays / operating elements			
Display		analog signal	LED, yellow Channels AO1...AO4
		diagnosis	LED, yellow
		Power	LED, green AS-i, AUX
		errors	LED, red
Accessories			
Items supplied		Combicon connector	
Remarks			
Pack quantity		1 pcs.	

AC3218



AS-Interface control cabinet module

SmartL25 4 AO (C) C IP20

Electrical connection

pin headers: 4 x ; Spacing: 5.0 mm

Connection

O+	C1	O-	0V
O+	C2	O-	0V
O+	C3	O-	0V

0V	O-	C4	O+
A+	A-	E+	E-

O+	Actuator supply +24V
C1...4	analog output Current
O-	Actuator supply 0V
0V	analog output 0V
A+	AS-i +
A-	AS-i -
E+	External actuator supply +24V
E-	External actuator supply 0V