


# AC5010



## Lower part for AS-Interface module

EMS-Base FC Addressing socket

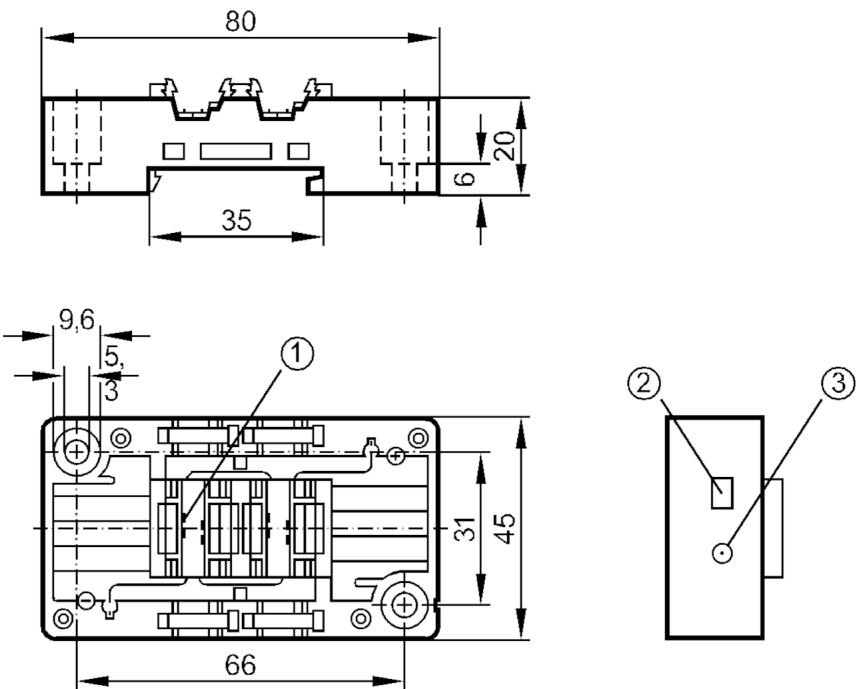

- 1 contact pins
- 2 panel for labelling
- 3 Addressing socket



| Electrical data                                |      |                                                                  |
|------------------------------------------------|------|------------------------------------------------------------------|
| Operating voltage                              | [V]  | 26.5...31.6 DC                                                   |
| Outputs                                        |      |                                                                  |
| Electrical design                              |      | AS-i                                                             |
| Contact rating                                 |      | < 2 A                                                            |
| Operating conditions                           |      |                                                                  |
| Ambient temperature                            | [°C] | -25...85                                                         |
| Protection                                     |      | IP 67; (depending on the upper part used: IP 20 / IP 65 / IP 67) |
| AS-i classification                            |      |                                                                  |
| AS-i addressing                                |      | Addressing socket                                                |
| Mechanical data                                |      |                                                                  |
| Weight                                         | [g]  | 59.5                                                             |
| Housing                                        |      | rectangular                                                      |
| Type of mounting                               |      | Mounting on DIN rail and panel                                   |
| Dimensions                                     | [mm] | 45 x 80 x 20                                                     |
| Material                                       |      | housing: PBT                                                     |
| Remarks                                        |      |                                                                  |
| Pack quantity                                  |      | 1 pcs.                                                           |
| Electrical connection                          |      |                                                                  |
| contact pins in module upper part :            |      |                                                                  |
| quick mounting technology for AS-i flat cable: |      |                                                                  |