


AC5031



Lower part for AS-Interface module

EMS-BASE RC ST SET

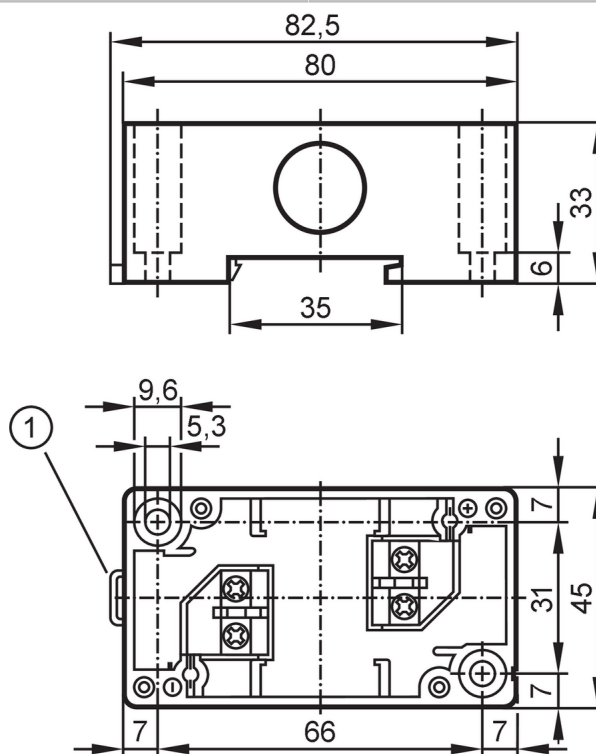

1 locking bolt

Electrical data

Operating voltage	[V]	26.5...31.6 DC
-------------------	-----	----------------

Outputs

Electrical design	AS-i
Contact rating	< 4 A

Operating conditions

Ambient temperature	[°C]	-25...85
Protection		IP 65

Mechanical data

Weight	[g]	115.2
Housing		rectangular
Type of mounting		Mounting on DIN rail and panel
Dimensions	[mm]	82.5 x 45 x 33
Material		housing: PBT

Accessories

Items supplied	flat cable seals: 2, NBR
	cable glands: 3
	Protective caps: 3
	Hexagon nuts: 4
Accessories (optional)	cover., for AS-i module, AC3000
	screw terminal insert., AC5007

Remarks

Remarks	up to 4 M20 cable ports for any T and cross branches
Pack quantity	1 pcs.

AC5031



Lower part for AS-Interface module

EMS-BASE RC ST SET

Electrical connection

screw terminals: ...2.5 mm²