


AC506S



Safe AS-Interface ClassicLine module with quick mounting technology

ClassicLine 4SI 2DO T 2LO

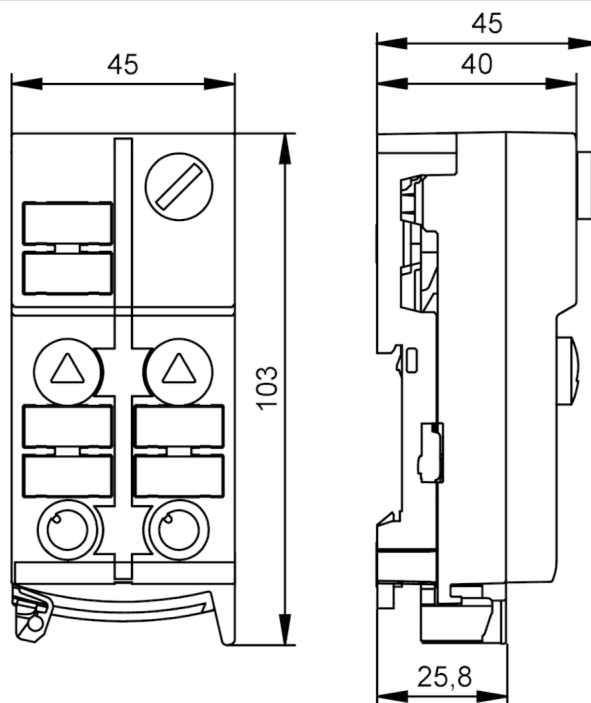

Application

Design	housing for DIN rail mounting
Application	AS-i Safety at Work

Electrical data

Operating voltage	[V]	26.5...31.6 DC; (cULus - Class 2 source required)
Current consumption	[mA]	< 280
Max. current load per module/slot	[A]	0.2
Integrated watchdog		yes

Inputs / outputs

Number of inputs and outputs	Number of digital inputs: 4; Number of digital outputs: 2
------------------------------	---

Inputs

Number of digital inputs	4; (2 x 2 safety inputs)
Input circuit of digital inputs	PNP
Sensor supply of the inputs	AS-i
Max. total current rating of inputs [mA]	200
Input current [mA]	8
Short-circuit detection	yes
Cross-fault monitoring	no
Short-circuit proof	yes

Outputs

Output signal	switching signal
Number of digital outputs	2
Voltage range DC	18...30; (AS-i)



Safe AS-Interface ClassicLine module with quick mounting technology

ClassicLine 4SI 2DO T 2LO

Max. current load per output	[mA]	50
Short-circuit proof		yes
Electrically separated		no
Actuator supply outputs		AS-i
Operating conditions		
Ambient temperature	[°C]	-25...55
Note on ambient temperature		with switched outputs: -25...40 °C
Max. height above sea level	[m]	2000
Protection		IP 67
Pollution degree		2
Tests / approvals		
EMC	EN 62026-2	
	EN 61326-3-1	
Safety classification		
Complies with the requirements		ISO 13849-1 Category 3, PL d IEC 61508 SIL 2
Mission time TM (additional indication)		20 years
PFH	[1/h]	2,4 E-11
AS-i classification		
AS-i version		2.11; 3.0
AS-i addressing		Addressing socket
Extended addressing mode		no
AS-i master profile		M3; M4
AS-i profile		S-7.B.E
AS-i I/O configuration	[hex]	7
AS-i ID code	[hex]	B.E
AS-i certificate		97201
Mechanical data		
Weight	[g]	296.5
Housing		rectangular
Type of mounting		AS-i flat cable connection; Mounting on DIN rail; (TH35 (EN 60715))
Dimensions	[mm]	103 x 45 x 44.7
Material		housing: PA; Piercing contacts: CuSn6 nickel-plated and tin-plated
Displays / operating elements		
Display	Power	1 x LED, green
	errors	1 x LED, red
	Switching status	1 x LED, yellow
	alarm	1 x LED, red
Electrical connection		
Module connection		Flat cable
Accessories		
Items supplied		lower part
Accessories (optional)		Addressing cable:, E70213
		Protective cap: M12, E73004



Safe AS-Interface ClassicLine module with quick mounting technology

ClassicLine 4SI 2DO T 2LO


Remarks	
Remarks	PL d, cat. 3, SIL 2 only if the fault exclusions described in the manual are used
Pack quantity	1 pcs.

Electrical connection

quick mounting technology for AS-i flat cable: ; three selectable directions

Electrical connection - Socket 1A


Connector: 1 x M12; coding: A; Contacts: 4; Maximum cable length: 10 m



1	S-11A
2	S-12A
3 (I-)	L-
4 (OUT O3 (PNP))	OUT DO3 (PNP)
5	n.c.

Electrical connection - Socket 1B


Connector: 1 x M12; coding: A; Contacts: 4; Maximum cable length: 10 m



1	S-11B
2	S-12B
3 (I-)	L-
4 (OUT O3 (PNP))	OUT DO3 (PNP)
5	n.c.

Electrical connection - Socket 2A


Connector: 1 x M12; coding: A; Contacts: 4; Maximum cable length: 10 m



1	S-21A
2	S-22A
3 (I-)	L-
4 (OUT O4 (PNP))	OUT DO4 (PNP)
5	n.c.

Electrical connection - Socket 2B

Connector: 1 x M12; coding: A; Contacts: 4; Maximum cable length: 10 m



1	S-21B
2	S-22B
3 (I-)	L-
4 (OUT O4 (PNP))	OUT DO4 (PNP)
5	n.c.

DO: digital output; n.c.: not used; OUT: Output