


AC508S



Safe AS-Interface ClassicLine module with quick mounting technology

ClassicL 2SI AUX 2DOT 2LO OSSD

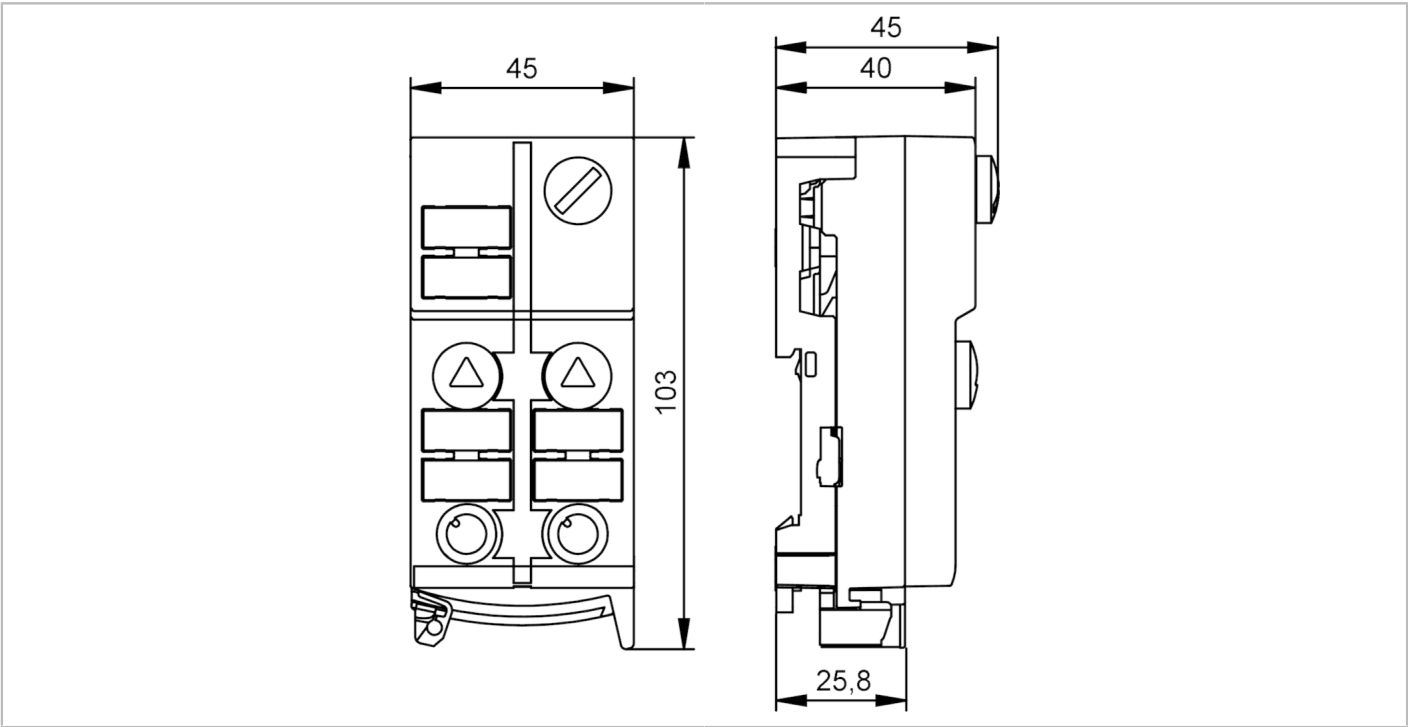

Application		
Design		housing for DIN rail mounting
Application		AS-i Safety at Work
Electrical data		
Operating voltage	[V]	26.5...31.6 DC; (cULus - Class 2 source required)
Max. current consumption from AS-i	[mA]	35
Protection class		III
Reverse polarity protection		yes
Additional voltage supply	[V]	19.2...28.8 DC
Max. current consumption from additional supply	[mA]	3000; (AUX ; to SELV/PELV)
Integrated watchdog		yes
Inputs / outputs		
Number of inputs and outputs		Number of digital inputs: 2; Number of digital outputs: 2
Inputs		
Number of digital inputs		2; (2 x safety input)
Input circuit of digital inputs		PNP
Sensor supply of the inputs		AUX
Voltage supply	[V]	19.2...28.8
Max. total current rating of inputs	[mA]	2000
Input current limitation	[mA]	8
Input current High	[mA]	> 6
Input current low	[mA]	< 2



Safe AS-Interface ClassicLine module with quick mounting technology

ClassicL 2SI AUX 2DOT 2LO OSSD

Switching level high	[V]	> 13
Switching level low	[V]	< 5
Overload protection digital inputs		yes
Short-circuit detection		yes
Cross-fault monitoring		no
Short-circuit proof		yes
Outputs		
Output signal		switching signal
Number of digital outputs		2
Voltage range DC	[V]	19.2...28.8; (AUX)
Max. current load per output	[mA]	500
Short-circuit protection		yes
Short-circuit proof		yes
Overload protection		yes
Electrically separated		no
Actuator supply outputs		AUX
Operating conditions		
Ambient temperature	[°C]	-25...55
Note on ambient temperature		with switched outputs: -25...40 °C
Max. relative air humidity	[%]	95
Max. height above sea level	[m]	2000
Protection		IP 67
Pollution degree		2
Tests / approvals		
EMC	EN 62026-2	
	EN 61326-3-1	
Shock resistance	EN 60068-2-27	
Vibration resistance	EN 60068-2-6	
Safety classification		
Complies with the requirements	ISO 13849-1 Category 4, PL e	
	IEC 61508 SIL 3	
Mission time TM (additional indication)	20 years	
PFH	[1/h]	2,33E-11
AS-i classification		
AS-i version	2.11; 3.0	
AS-i addressing	Addressing socket	
Extended addressing mode	no	
AS-i master profile	M3; M4	
AS-i profile	S-7.B.E	
AS-i I/O configuration	[hex]	7
AS-i ID code	[hex]	B.E
AS-i certificate	126301	



Safe AS-Interface ClassicLine module with quick mounting technology

ClassicL 2SI AUX 2DOT 2LO OSSD

Data bits	Data bit assignment	D0	D1	D2	D3
		O1	O2	O3	O4

Mechanical data	
Weight [g]	290.85
Housing	rectangular
Type of mounting	AS-i flat cable connection; Mounting on DIN rail; (TH35 (EN 60715))
Dimensions [mm]	103 x 45 x 44.7
Material	housing: PA; Piercing contacts: CuSn6 nickel-plated and tin-plated

Displays / operating elements		
Display	Power	1 x LED, green
	errors	1 x LED, red
	Switching status	1 x LED, yellow
	alarm	1 x LED, red


Electrical connection	
Module connection	Flat cable
Accessories	
Items supplied	lower part
Accessories (optional)	Addressing cable:, E70213
	Protective cap: M12, E73004

Remarks	
Remarks	PL e, cat. 4, SIL 3 only if the fault exclusions described in the manual are used
Pack quantity	1 pcs.

Electrical connection	
quick mounting technology for AS-i flat cable: ; three selectable directions	

Electrical connection - O-3/4


Connector: 1 x M12; coding: A; Contacts: 3; Maximum cable length: 10 m



1	n.c.	
2		O-4
3 (I-)	L-	
4		O-3
5	n.c.	

Electrical connection - O-4

Connector: 1 x M12; coding: A; Contacts: 2; Maximum cable length: 10 m



1	n.c.	
2	n.c.	
3 (I-)	L-	
4		O-4
5	n.c.	




Safe AS-Interface ClassicLine module with quick mounting technology

ClassicL 2SI AUX 2DOT 2LO OSSD

Electrical connection - SI-1/2


Connector: 1 x M12; coding: A; Contacts: 5; Maximum cable length: 10 m



1 (I+)	L+	
2		SI-2
3 (I-)	L-	
4		SI-1
5		FE

Electrical connection - Trans

Connector: 1 x M12; coding: A; Contacts: 5; Maximum cable length: 10 m



1 (I+)	L+	
2 (I-)	L-	
3 (I-)	L-	
4 (I+)	L+	
5		FE

FE: functional earth; n.c.: not used