




AS-Interface ClassicLine module with quick mounting technology

ClassicLine 4SB IP67

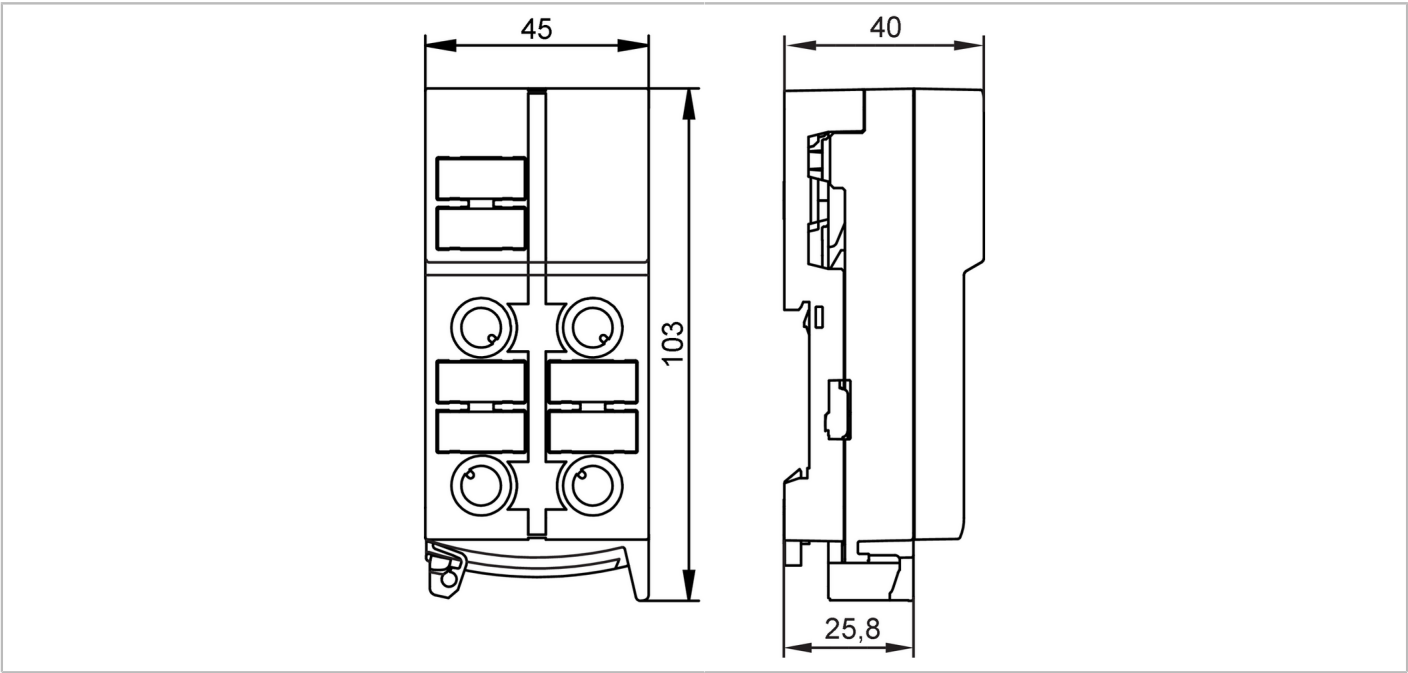


Application		
Design	housing for DIN rail mounting	
Application	field installation	
Electrical data		
Operating voltage	[V]	26.5...31.6 DC; (cULus - Class 2 source required)
Max. current load per module/slot	[A]	2; (AS-i: 2; AUX: 2)
Additional voltage supply	[V]	15...30 DC; (AUX ; cULus - Class 2 source required)
Operating conditions		
Ambient temperature	[°C]	-25...70
Protection	IP 67	
Tests / approvals		
EMC	EN 50295	
	IEC 61000-6-2	
MTTF	[years]	10284
Mechanical data		
Weight	[g]	152.5
Housing	rectangular	
Type of mounting	AS-i flat cable connection; Mounting on DIN rail; (TH35 (EN 60715))	
Material	PA; Piercing contacts: CuSn6 nickel-plated and tin-plated	
Electrical connection		
Module connection	Flat cable	
Accessories		
Items supplied	lower part	
Accessories (optional)	Protective cap: M12, E73004	

AC5200



AS-Interface ClassicLine module with quick mounting technology

ClassicLine 4SB IP67

Remarks	
Pack quantity	1 pcs.
Electrical connection	
quick mounting technology for AS-i flat cable: ; three selectable directions	
Connector: M12; coding: A	
	
1	AS-i +
2	External voltage -
3	AS-i -
4	External voltage +