


AC5210



AS-Interface ClassicLine module with quick mounting technology

ClassicLine 8DI-Y IP67

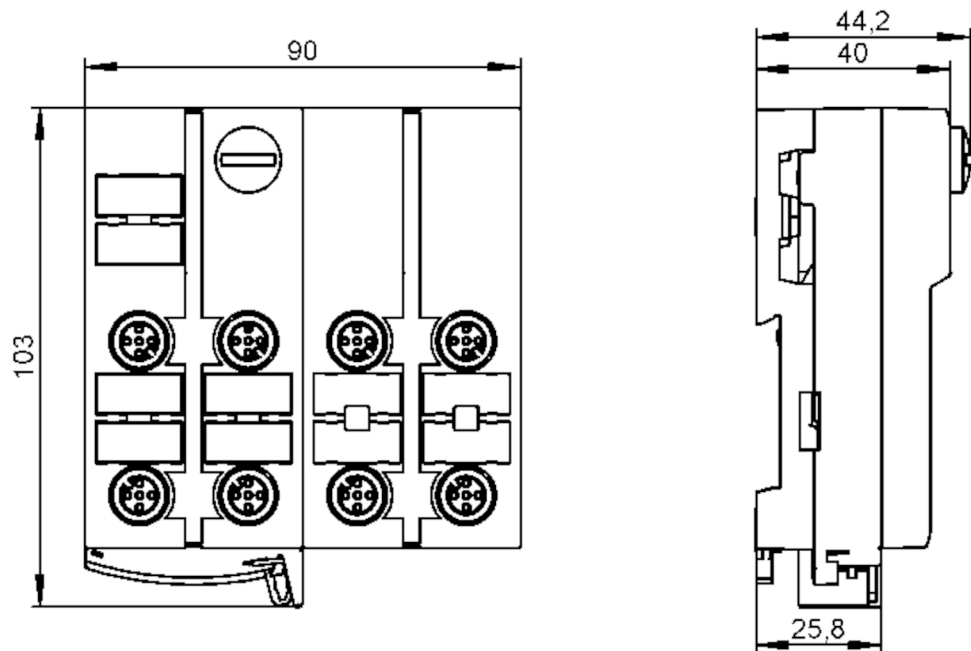

Application

Design	housing for DIN rail mounting
Application	field installation

Electrical data

Operating voltage	[V]	26.5...31.6 DC; (cULus - Class 2 source required)
Max. current consumption from AS-i	[mA]	300

Inputs / outputs

Number of inputs and outputs	Number of digital inputs: 8
------------------------------	-----------------------------

Inputs

Number of digital inputs		8; (2 x Slave)
Input circuit of digital inputs		PNP
Sensor supply of the inputs		AS-i
Voltage supply	[V]	18...30
Max. total current rating of inputs	[mA]	250; (2 x 125)
Input current High	[mA]	6...10
Input current low	[mA]	0...2
Switching level high	[V]	> 11
Digital inputs protected against short circuits		yes

Operating conditions

Ambient temperature	[°C]	-25...70
---------------------	------	----------



AS-Interface ClassicLine module with quick mounting technology

ClassicLine 8DI-Y IP67

Protection		IP 67				
Tests / approvals						
EMC		EN 50295				
		IEC 61000-6-2				
MTTF [years]		218				
AS-i classification						
AS-i version		2.11; 3.0				
AS-i addressing		Addressing socket				
Extended addressing mode		yes				
AS-i master profile		M2; M3; M4				
AS-i profile		S-0.A.E				
AS-i I/O configuration [hex]		0				
AS-i ID code [hex]		A.E				
AS-i certificate		89001				
Data bits		Data bit	D0	D1	D2	D3
		Input	1	2	3	4
		Socket	I-1/2	I-1/2 I-2	I-3/4	I-3/4 I-4
		Pin	4	2 4	4	2 4
Mechanical data						
Weight [g]		284.5				
Housing		rectangular				
Type of mounting		AS-i flat cable connection; Mounting on DIN rail; (TH35 (EN 60715))				
Dimensions [mm]		103 x 90 x 44.2				
Material		PA; Piercing contacts: CuSn6 nickel-plated and tin-plated				
Displays / operating elements						
Display		Power			LED, green	
		errors			LED, red	
		Function			LED, yellow	
Electrical connection						
Module connection		Flat cable				
Accessories						
Items supplied		lower part				
Accessories (optional)		Protective cap: M12, E73004				
Remarks						
Remarks		Do not connect any of the following points to an external potential:				
		I-, I+, I1, I2, I3, I4				
		The connections are electrically connected with the AS-i cable.				
		Default setting of the ID1 codes: slave 1=1 / slave 2=2				
Pack quantity		1 pcs.				



AS-Interface ClassicLine module with quick mounting technology

ClassicLine 8DI-Y IP67


Electrical connection

quick mounting technology for AS-i flat cable: ; three selectable directions


Connection

AN_i_1360_GG

Original Scale Drawing (MTD)

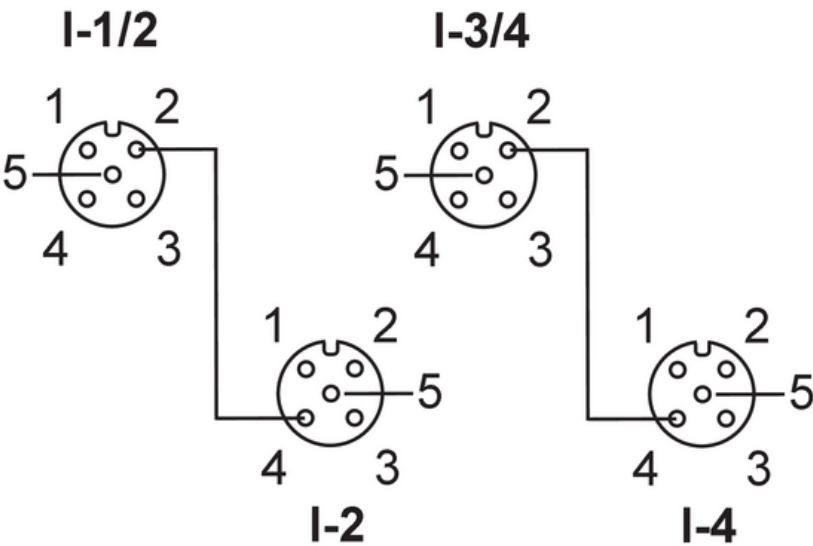

EPS Source
Product Scale Drawing
Frame Size: 75 mm x 45 mm





AS-Interface ClassicLine module with quick mounting technology

ClassicLine 8DI-Y IP67

Connector: M12

2x	Inputs
	Socket I-1/2
1	Sensor supply L+
2	Data input 2
3	Sensor supply L-
4	Data input 1
5	not used
	Socket I-2
1	Sensor supply L+
2	not used
3	Sensor supply L-
4	Data input 2
5	not used
	Socket I-3/4
1	Sensor supply L+
2	Data input 4
3	Sensor supply L-
4	Data input 3
5	not used
	Socket I-4
1	Sensor supply L+
2	not used
3	Sensor supply L-
4	Data input 4
5	not used