


AC5250



AS-Interface Airbox with quick mounting technology

AirBox 5/2 bist. 2DI-Y IP67

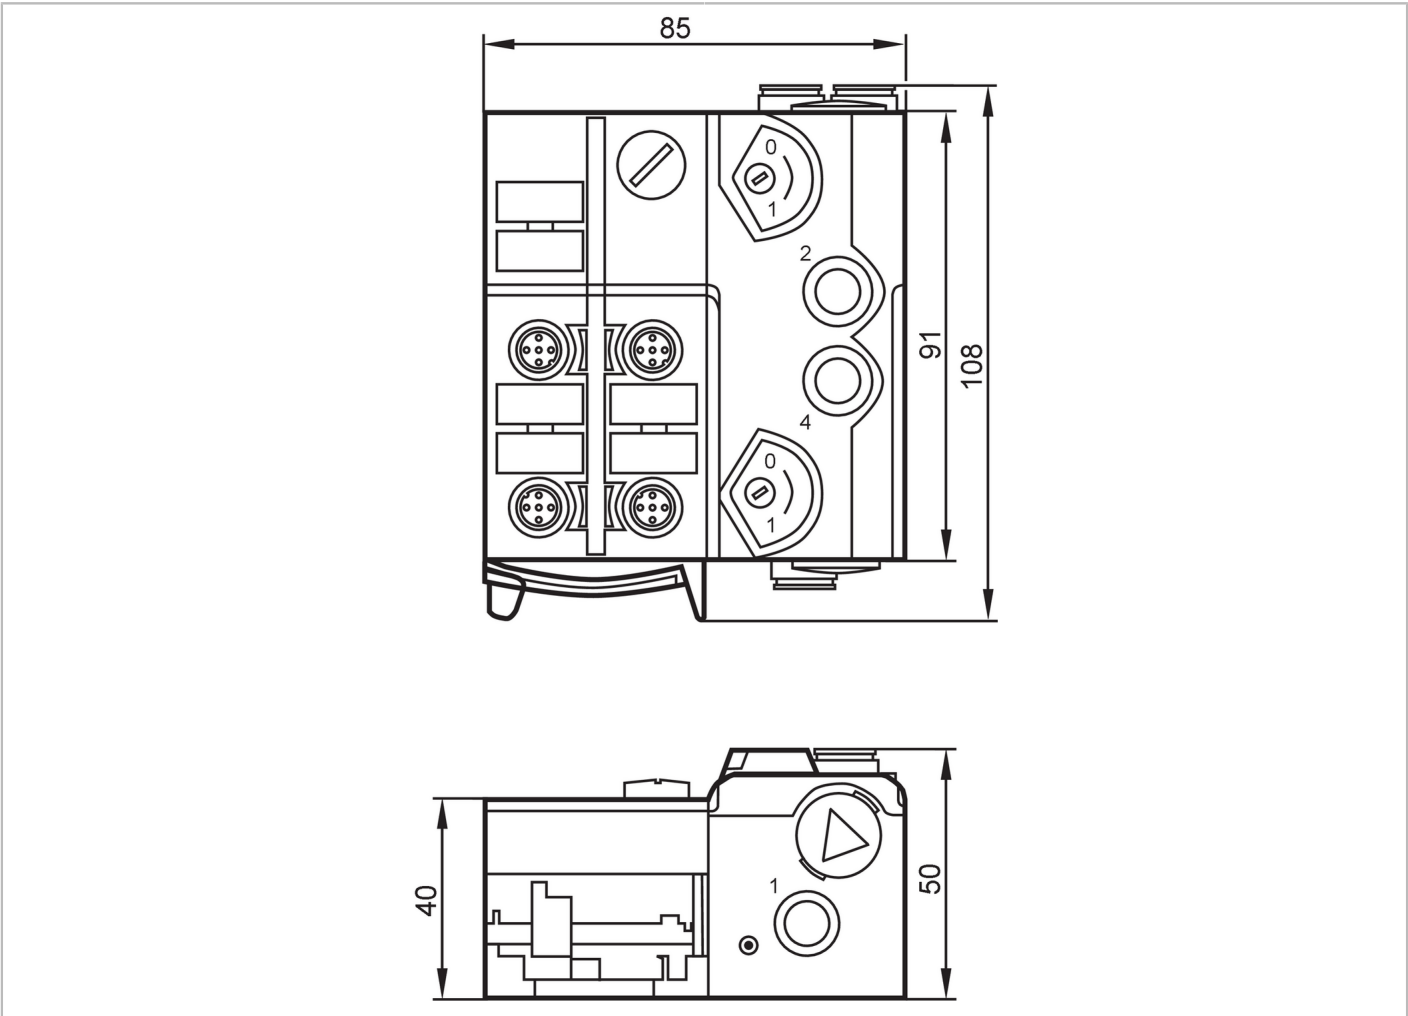

Application	
Design	housing for DIN rail mounting
Application	field installation
Medium temperature	[-10...50 °C]
Electrical data	
Operating voltage	[V] 26.5...31.6 DC
Max. current consumption from AS-i	[mA] 180
Inputs / outputs	
Number of inputs and outputs	Number of digital inputs: 2; Number of pneumatic outputs: 2
Inputs	
Number of digital inputs	2
Input circuit of digital inputs	PNP
Sensor supply of the inputs	AS-i
Voltage supply	[V] 20...30; (via flat cable)
Max. total current rating of inputs	[mA] 100

AC5250



AS-Interface Airbox with quick mounting technology

AirBox 5/2 bist. 2DI-Y IP67

Input current High	[mA]	6...10
Input current low	[mA]	0...2
Switching level high	[V]	> 11
Digital inputs protected against short circuits		yes

Outputs

Number of pneumatic outputs	2; (pneumatic NO/NC selectable output ; Bistable)
Actuator supply outputs	AS-i

Operating conditions

Ambient temperature	[°C]	-10...55
Protection		IP 65; IP 67

Tests / approvals

EMC	EN 50295	
	IEC 61000-6-2	
MTTF	[years]	286

AS-i classification

AS-i version	2.11; 3.0				
AS-i addressing	Addressing socket				
Extended addressing mode	no				
AS-i master profile	M2; M3; M4				
AS-i profile	S-3.F.F				
AS-i I/O configuration	[hex]	3			
AS-i ID code	[hex]	F.F			
Data bits	Data bit	D0	D1	D2	D3
	Input	1	2	3	4
	Socket	I-1/2	I-1/2 I-2	-	-
	Pin	4	2 4	-	-
	pneumatic output	-	-	4	2

Mechanical data

Weight	[g]	383
Housing		rectangular
Type of mounting		quick mounting; AS-i flat cable connection; Mounting on DIN rail; (TH35 (EN 60715))
Dimensions	[mm]	108 x 85 x 50
Material		PA; POM; Piercing contacts: CuSn6 nickel-plated and tin-plated
Pneumatic system		1 x 5/2-way slide valve (free from overlapping); bistable
Operating pressure range		3...8 bar 0.3...0.8 MPa 43.5...116 psi
Air flow at 6/5 bar	[l/min]	500
Permissible compressed air		non-lubricated compressed air class 6-3-1; lubricated compressed air class 6-3-4
Manual override		pressing/releasing or pressing/turning/locking
Tube fittings		8 mm
Exhaust		exhaust can be discharged through tube connection

Displays / operating elements

Display	Power	LED, green
	errors	LED, red
	Function	LED, yellow

AC5250




AS-Interface Airbox with quick mounting technology

AirBox 5/2 bist. 2DI-Y IP67

Electrical connection	
Module connection	Flat cable
Accessories	
Items supplied	lower part
Accessories (optional)	Mounting plate:, E74999
	Module lower part:, E75000
	Protective cap: M12, E73004
	sealing plug:, E75231
	Silencer:, E75232
	Push-in L-fitting:, E75228
	Push-in T-fitting:, E75227
Remarks	
Remarks	If not pneumatically operated, E75231 sealing plug must be inserted.
	Avoid ingress of dirt and dust.
	Do not connect any of the following points to an external potential:
	I-, I+, I1, I2
	The connections are electrically connected with the AS-i cable.
	Please see the notes on compressed air and EMC/ESD under "Downloads"
Pack quantity	1 pcs.

Electrical connection	
quick mounting technology for AS-i flat cable: ; three selectable directions	
Connection	

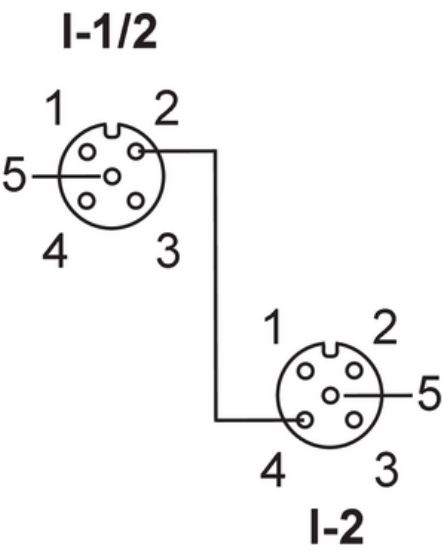



AS-Interface Airbox with quick mounting technology


AirBox 5/2 bist. 2DI-Y IP67

Connector: M12

	Inputs
	Socket I-1/2
1	Sensor supply L+
2	Data input 2
3	Sensor supply L-
4	Data input 1
5	functional earth (FE)
	Socket I-2
1	Sensor supply L+
2	not used
3	Sensor supply L-
4	Data input 2
5	functional earth (FE)

Diagrams and graphs

Pneumatic symbol

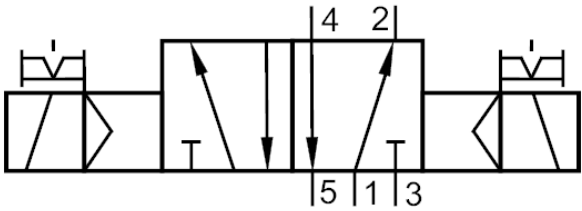

1 x 5/2-way slide valve (free from overlapping); bistable