


AC5290



AS-Interface ClassicLine module with quick mounting technology

ClassicLine 4DI-Y AUX IP67

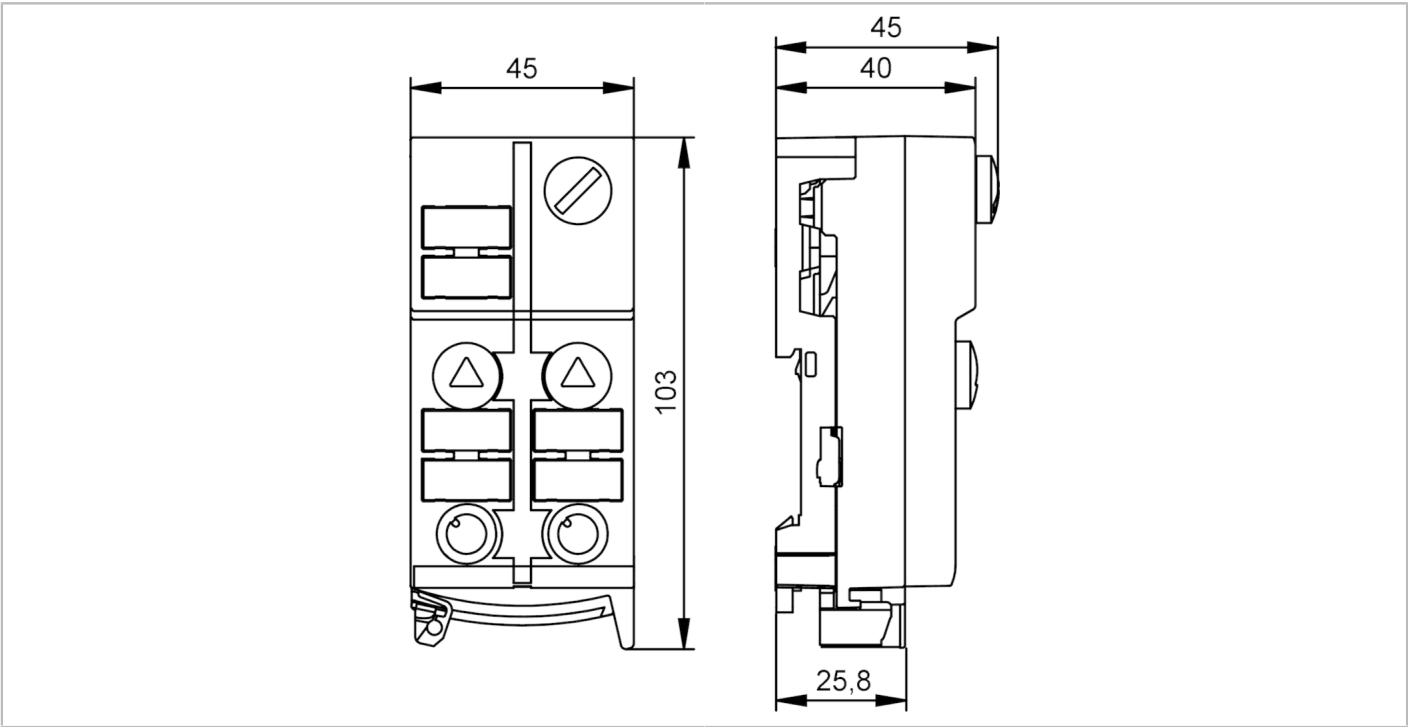

Application		
Design		housing for DIN rail mounting
Application		field installation
Electrical data		
Operating voltage	[V]	26.5...31.6 DC; (cULus - Class 2 source required)
Max. current consumption from AS-i	[mA]	30
Inputs / outputs		
Number of inputs and outputs		Number of digital inputs: 4
Inputs		
Number of digital inputs		4
Input circuit of digital inputs		PNP
Sensor supply of the inputs		AUX
Voltage supply	[V]	20...30; (via flat cable)
Max. total current rating of inputs	[mA]	1000
Input current High	[mA]	6...10
Input current low	[mA]	0...2
Switching level high	[V]	> 11
Digital inputs protected against short circuits		yes
Operating conditions		
Ambient temperature	[°C]	-25...70
Protection		IP 67



AS-Interface ClassicLine module with quick mounting technology

ClassicLine 4DI-Y AUX IP67

Tests / approvals						
EMC	EN 50295					
	IEC 61000-6-2					
MTTF	[years]	225				
AS-i classification						
AS-i version	2.11; 3.0					
AS-i addressing	Addressing socket					
Extended addressing mode	yes					
AS-i master profile	M2; M3; M4					
AS-i profile	S-0.A.E					
AS-i I/O configuration	[hex]	0				
AS-i ID code	[hex]	A.E				
Data bits	Data bit	D0	D1	D2	D3	
	Input	1	2	3	4	
	Socket	I-1/2	I-1/2 I-2	I-3/4	I-3/4 I-4	
	Pin	4	2 4	4	2 4	
Parameter bits	Parameter bit	Description				
	P0	not used				
	P1	peripheral fault indication	: 1	activated	* / 0	disabled
	P2	not used				
	P3	not used				
Mechanical data						
Weight	[g]	173				
Housing	rectangular					
Type of mounting	quick mounting; AS-i flat cable connection; Mounting on DIN rail; (TH35 (EN 60715))					
Dimensions	[mm]	103 x 45 x 44.7				
Material	PA; Piercing contacts: CuSn6 nickel-plated and tin-plated					
Displays / operating elements						
Display	Power	LED, green			Voltage AUX > 7 V	
	errors	LED, red			AUX 15 V ± 2 V	
	Function	LED, yellow				
Electrical connection						
Module connection	Flat cable					
Accessories						
Items supplied	lower part					
Accessories (optional)	Protective cap: M12, E73004					
Remarks						
Pack quantity	1 pcs.					



AS-Interface ClassicLine module with quick mounting technology

ClassicLine 4DI-Y AUX IP67


Electrical connection

quick mounting technology for AS-i flat cable: ; three selectable directions


Connection

AN_i_1360_GG

Original Scale Drawing (MTD)

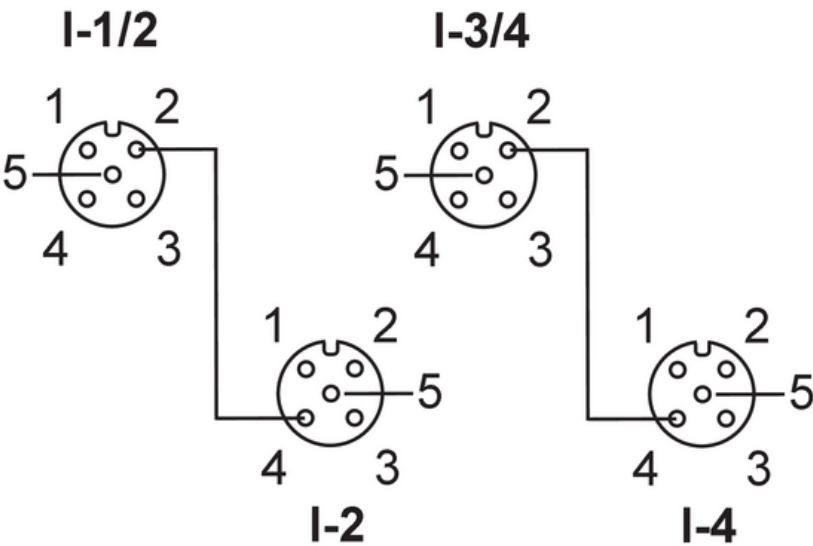

EPS Source
Product Scale Drawing
Frame Size: 75 mm x 45 mm





AS-Interface ClassicLine module with quick mounting technology

ClassicLine 4DI-Y AUX IP67

Connector: M12

	Inputs
	Socket I-1/2
1	Sensor supply L+
2	Data input 2
3	Sensor supply L-
4	Data input 1
5	not used
	Socket I-2
1	Sensor supply L+
2	not used
3	Sensor supply L-
4	Data input 2
5	not used
	Socket I-3/4
1	voltage supply L+
2	Data input 4
3	Sensor supply L-
4	Data input 3
5	not used
	Socket I-4
1	Sensor supply L+
2	not used
3	Sensor supply L-
4	Data input 4
5	not used