


AL1202



IO-Link master with Profinet interface

IO-Link Master PL PN 8P IP67

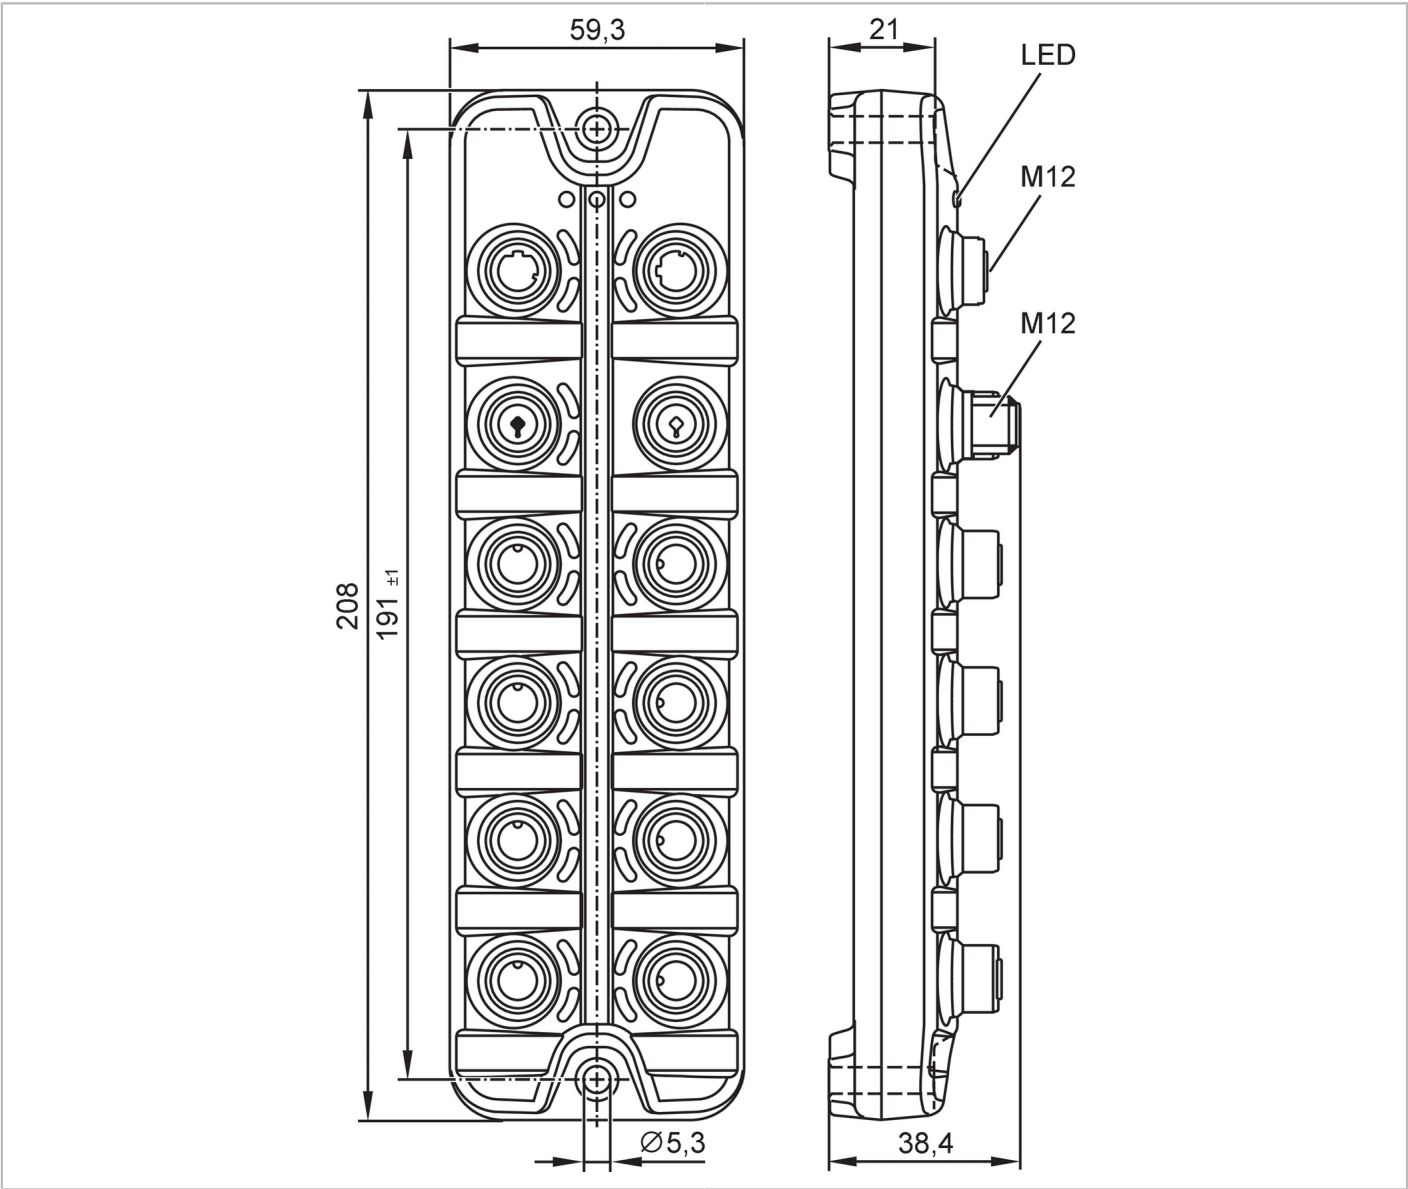

IO-Link



Application

Application

I/O modules for field applications

Daisy-chain function

voltage supply; fieldbus interface

Electrical data

Operating voltage

[V]

20...30 DC; (US ; to SELV/PELV)

Current consumption

[mA]

300...3900; (US)

Protection class

III

Additional voltage supply

[V]

20...30 DC; (UA)

Actuator supply UA

Max. current load total

[A]

3.6

Sensor supply US

Max. current load total

[A]

3.6



IO-Link master with Profinet interface


IO-Link Master PL PN 8P IP67

Inputs / outputs		
Total number of inputs and outputs		12; (configurable)
Number of inputs and outputs		Number of digital inputs: 12; Number of digital outputs: 8
Inputs		
Number of digital inputs		12; (IO-Link Port Class A: 4 x 2; IO-Link Port Class B: 4 x 1)
Switching level high	[V]	11...30
Switching level low	[V]	0...5
Digital inputs protected against short circuits		yes
Outputs		
Number of digital outputs		8; (IO-Link Port Class A: 4 x 1; IO-Link Port Class B: 4 x 1)
Max. current load per output	[mA]	300
Short-circuit proof		yes
Interfaces		
Communication interface		Ethernet; IO-Link
Ethernet - PROFINET		
Transmission standard		100Base-TX
Transmission rate		100 MBit/s
Protocol		PROFINET
Factory settings		IP address: 0.0.0.0
		subnet mask: 0.0.0.0
		gateway IP address: 0.0.0.0
		MAC address: see type label
		CC-C (Conformance Class C) (IRT-Switch)
Note on interfaces		Netload Class III
		SNMP (Simple Network Management Protocol)
		MRP (Media Redundancy Protocol)
		Supported network topologies: line
		ring
IO-Link Master		
Transmission type		COM1 (4,8 kBaud); COM2 (38,4 kBaud); COM3 (230,4 kBaud)
IO-Link revision		1.1
Number of ports class A		4
Number of ports class B		4
Operating conditions		
Ambient temperature	[°C]	-25...60
Storage temperature	[°C]	-25...85
Max. relative air humidity	[%]	90
Protection		IP 65; IP 66; IP 67
Protection rating (NEMA 250)		6P
Pollution degree		2
Chemical media	ISO 16750-5	AA, BA, BD, HLP, CC, DB, DC, DD, CA
	NEMA 250 5.13.1	AA



IO-Link master with Profinet interface

IO-Link Master PL PN 8P IP67

Tests / approvals		
EMC	EN 61000-6-2	
	EN 61000-6-4	
Shock resistance	DIN EN 60068-2-27	
Vibration resistance	DIN EN 60068-2-64 2009-04	
	DIN EN 60068-2-6 2008-10	
MTTF	[years]	63
Mechanical data		
Weight	[g]	409.5
Housing		rectangular
Type of mounting		Backplane mounting
Dimensions	[mm]	208 x 59.3 x 38.4
Material		housing: PA orange; Socket: brass nickel-plated
Sealing material		FKM
Remarks		
Remarks		Further information is available in the manual.
Pack quantity		1 pcs.
Electrical connection - Ethernet		
Connector: 2 x M12; coding: D; Contacts: 4; sealing: FKM		
		
IN / OUT X21, X22		
1	TX +	
2	RX +	
3	TX -	
4	RX -	
5	not used	
Electrical connection - IO-Link		
Connector: 8 x M12; coding: A; Contacts: 5; sealing: FKM		
		
IO-Link Port Class A X01...X04		
1	Sensor supply (US) L +	
2	Digital input	
3	Sensor supply (US) L -	
4	C/Q IO-Link	
5	not used	
IO-Link Port Class B X05...X08		
1	Sensor supply (US) L +	
2	Actuator supply (UA) L +	
3	Sensor supply (US) L -	
4	C/Q IO-Link	
5	Actuator supply (UA) L -	




IO-Link master with Profinet interface

IO-Link Master PL PN 8P IP67

Electrical connection - voltage supply IN

Connector: 1 x M12; coding: T; Contacts: 4




X31

1	+ 24 V DC (US) brown
2	GND (UA) white
3	GND (US) blue
4	+ 24 V DC (UA) black

Electrical connection - voltage supply OUT

Connector: 1 x M12; coding: T; Contacts: 4; sealing: FKM



X32

1	+ 24 V DC (US) brown
2	GND (UA) white
3	GND (US) blue
4	+ 24 V DC (UA) black