




IO-Link master with EtherNet/IP interface

IO-Link Master CL EIP 8P IP20

Alternative articles: AL1921

When selecting an alternative article and accessories please note that technical data may differ!

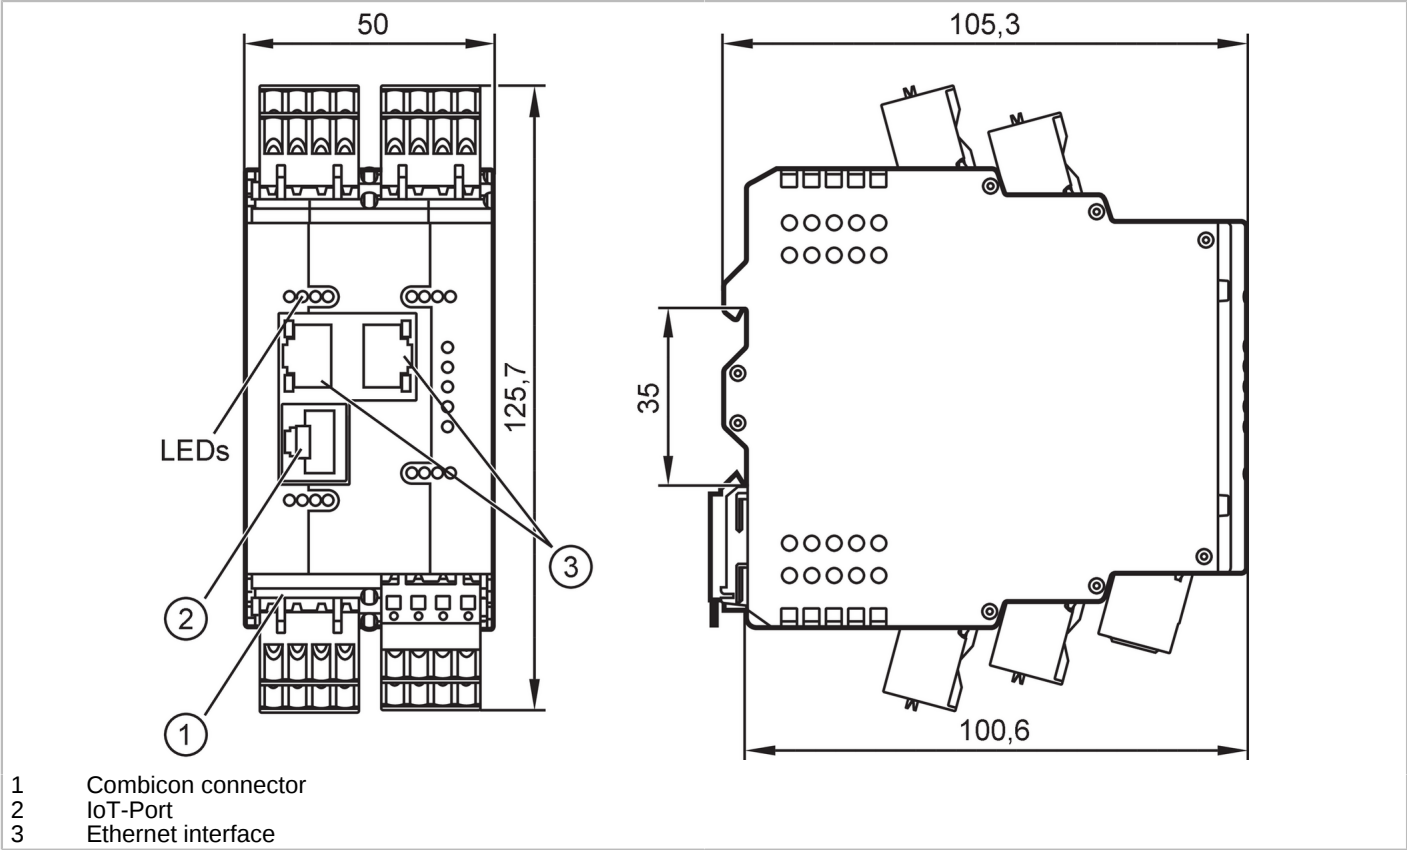

Application	
Design	housing for DIN rail mounting
Application	I/O modules for use in the control cabinet
Electrical data	
Operating voltage	[V] 20...30 DC; (US ; to SELV/PELV)
Current consumption	[mA] 300...3900; (US)
Protection class	III
Sensor supply US	
Max. current load total	[A] 3.6
Inputs / outputs	
Total number of inputs and outputs	16; (configurable)
Number of inputs and outputs	Number of digital inputs: 8; Number of digital outputs: 8
Inputs	
Number of digital inputs	8; (IO-Link Port Class A)
Switching level high	[V] 11...30
Switching level low	[V] 0...5
Digital inputs protected against short circuits	yes



IO-Link master with EtherNet/IP interface

IO-Link Master CL EIP 8P IP20

Outputs		
Number of digital outputs	8; (IO-Link Port Class A)	
Max. current load per output [mA]	300	
Short-circuit proof	yes	
Interfaces		
Communication interface	Ethernet; IO-Link	
Ethernet - EtherNet/IP		
Transmission standard	10Base-T; 100Base-TX	
Transmission rate	10 MBit/s; 100 MBit/s	
Protocol	EtherNet/IP	
Factory settings	IP address: 192.168.1.250	
	subnet mask: 255.255.255.255	
	gateway IP address: 0.0.0.0	
	MAC address: see type label	
Note on interfaces	DHCP, BOOTP, static	
	DLR (Device Level Ring)	
	Supported network topologies: line	
	ring	
Ethernet - Internet of Things		
Transmission standard	10Base-T; 100Base-TX	
Transmission rate	10 MBit/s; 100 MBit/s	
Protocol	MQTT JSON	
Factory settings	IP address: 169.254.x.x	
	subnet mask: 255.255.0.0	
	gateway IP address: 0.0.0.0	
	MAC address: see type label	
Note on interfaces	Safety protocol: HTTPS	
IO-Link Master		
Transmission type	COM1 (4,8 kBaud); COM2 (38,4 kBaud); COM3 (230,4 kBaud)	
IO-Link revision	1.1	
Number of ports class A	8	
Operating conditions		
Ambient temperature [°C]	-25...65	
Storage temperature [°C]	-25...85	
Max. relative air humidity [%]	90	
Protection	IP 20	
Tests / approvals		
EMC	EN 61000-6-2	
	EN 61000-6-4	
MTTF [years]	78	
Mechanical data		
Weight [g]	319.2	
Housing	rectangular	
Type of mounting	Mounting on DIN rail; (TH35 (EN 60715))	

AL1920



IO-Link master with EtherNet/IP interface

IO-Link Master CL EIP 8P IP20

Dimensions	[mm]	125.7 x 50 x 105.3
Material		housing: PA orange

Accessories

Items supplied	cage clamps: 9
----------------	----------------

Remarks

Remarks	Further information is available in the manual.
Pack quantity	1 pcs.


Electrical connection

voltage supply X31	
1	GND (US)
2	GND (US)
3	+ 24 V DC (US)
4	+ 24 V DC (US)

IO-Link Port Class A X01...X08	
1	Sensor supply (US) L+
2	Digital input
3	Sensor supply (US) L-
4	C/Q IO-Link

Electrical connection - Ethernet

Connector: RJ45; Contacts: 4



EtherNet IP X21, X22	
1	TX +
2	TX -
3	RX +
4	not used
5	not used
6	RX -
7	not used
8	not used

IoT X23	
1	TX +
2	TX -
3	RX x
4	not used
5	not used
6	RX -
7	not used
8	not used