


AL2321



IO-Link input/output module

IOL MOD SL 8XD/DX A M12 IP67

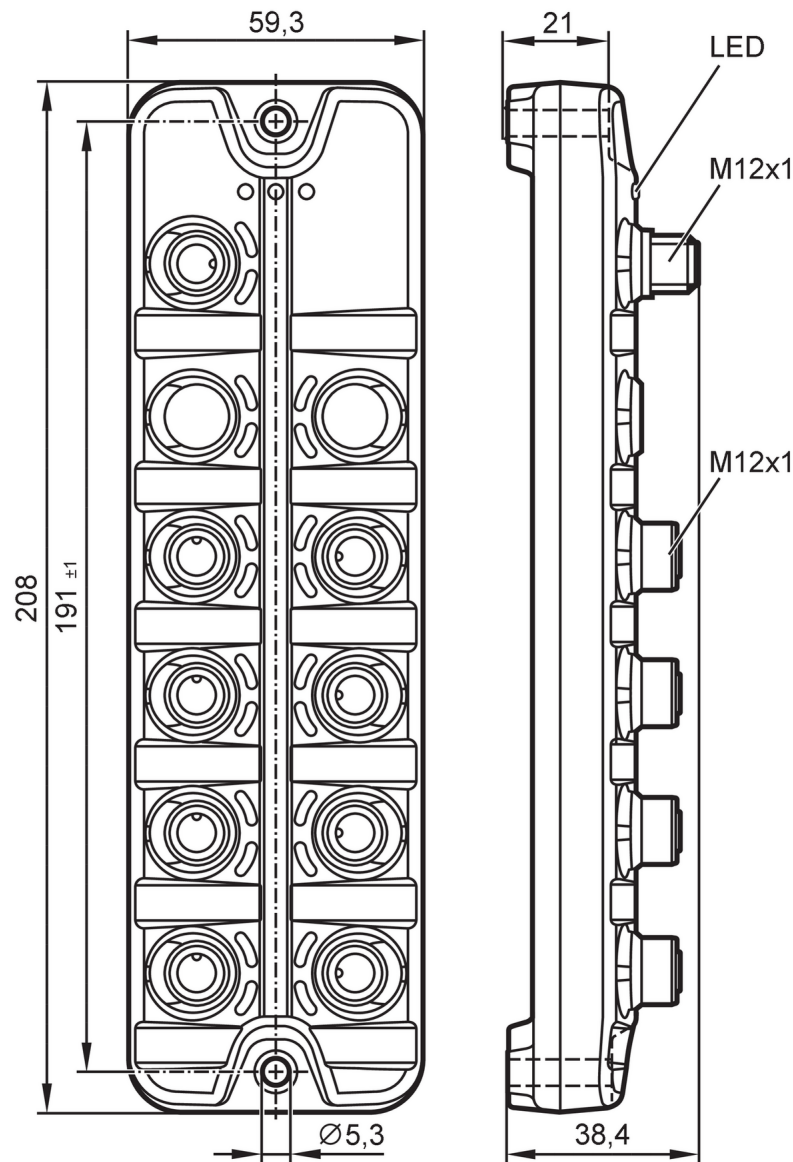

Depending on the version some LEDs are inactive



Electrical data		
Operating voltage	[V]	18...30 DC
Current consumption	[mA]	1100; (US)
Protection class		III
Inputs / outputs		
Total number of inputs and outputs		16
Number of inputs and outputs		Number of digital inputs: 16; Number of digital outputs: 16
Inputs		
Number of digital inputs		16; (configurable)
Input circuit of digital inputs		PNP; (type 3 (IEC 61131-2))
Sensor supply of the inputs		US



IO-Link input/output module

IOL MOD SL 8XDX/DX A M12 IP67

Voltage supply	[V]	18...30
Input current High	[mA]	2...15
Input current low	[mA]	0...1.5
Switching level high	[V]	11...28
Switching level low	[V]	0...5

Outputs		
Number of digital outputs		16; (configurable)
Max. current load per output	[mA]	1000
Max. current load outputs total	[A]	1
Short-circuit protection		yes
Actuator supply outputs		US

Interfaces		
Communication interface		IO-Link
Transmission type		COM3 (230,4 kBaud)
IO-Link revision		1.1
SDCI standard		IEC 61131-9
Profiles	Common - I&D	Identification and Diagnosis
SIO mode		no
Required master port class		A
Min. process cycle time	[ms]	4
Supported DeviceIDs	Type of operation	DeviceID
	default	1314
Note	For further information please see the IODD PDF file at "Downloads"	

Operating conditions		
Ambient temperature	[°C]	-25...60
Storage temperature	[°C]	-25...70
Max. relative air humidity	[%]	90
Max. height above sea level	[m]	2000
Protection		IP 65; IP 67
Protection rating (NEMA 250)		6P
Pollution degree		2
Chemical media	ISO 16750-5	AA, BA, BD, HLP, CC, DB, DC, DD, CA
	NEMA 250 5.13.1	AA

Tests / approvals		
EMC	EN 61000-6-2	
	EN 61000-6-3	
	IEC 61131-9	
Shock resistance	DIN EN 60068-2-27	
Vibration resistance	DIN EN 60068-2-64	
	DIN EN 60068-2-6	
MTTF	[years]	46

Mechanical data		
Weight	[g]	435.932
Housing		rectangular

AL2321



IO-Link input/output module

IOL MOD SL 8XDX/DX A M12 IP67

Type of mounting	Backplane mounting
Dimensions [mm]	208 x 59.3 x 38.4
Material	housing: PA orange; Socket: brass nickel-plated
Sealing material	FKM

Displays / operating elements

Display	Power	1 x LED, green
	fault	1 x LED, red
	Function	1 x LED, yellow

Accessories

Accessories (optional)	protective cap for M12 sockets
------------------------	--------------------------------

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection - IO-Link


Connector: 1 x M12; coding: A; Contacts: 4



X1	
1	+ 24 V DC (US)
2	not used
3	GND (US)
4	IO-Link

Electrical connection - inputs / outputs

Connector: 8 x M12; coding: A; Contacts: 4; sealing: FKM



X1.0...X1.7	
1	+ 24 V DC (US)
2	I/O2
3	GND (US)
4	I/O1
5	not used