


CR1141



Programmable Human Machine Interface

ecomatDisplay/4.3"/STD./U

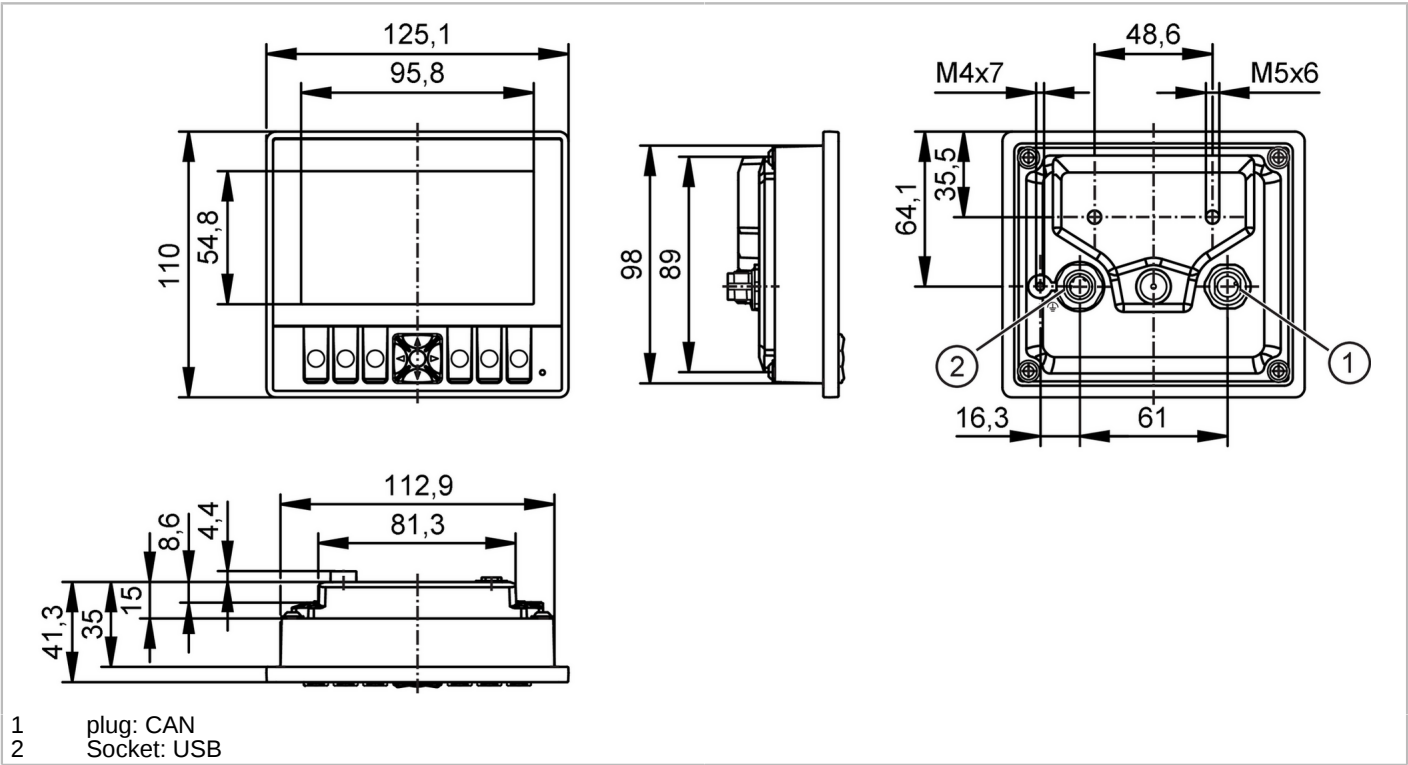

- 1 plug: CAN
- 2 Socket: USB



Product characteristics		
Communication interface	CAN; USB	
Operating elements	6	freely programmable backlit function keys
	1	navigation key with central confirmation button
Display type	Color display	
Application		
Application	for mobile applications; For use in industrial environments; for use in wet environments	
Electrical data		
Operating voltage	[V]	8...32 DC; (to SELV/PELV)
Nominal voltage DC	[V]	12 / 24
Current consumption	[mA]	< 333; (24 V DC)
Power consumption	[W]	8
Inputs / outputs		
Number of inputs and outputs	Number of digital inputs: 1	
Inputs		
Number of digital inputs	1; (non-configurable service input)	
Software / programming		
Parameter setting options	CODESYS 3.5; Qt	
PLC function to IEC 61131-3	yes	
Operating system	Embedded Linux	
Interfaces		
Communication interface	CAN; USB	



Programmable Human Machine Interface

ecomatDisplay/4.3"/STD./U

Number of CAN interfaces		1
Number of USB interfaces		1
CAN		
Transmission rate		10 kBit/s... 1 MBit/s
Protocol		CANopen; SAE J1939; free protocol
Profile		CiA DS 301 Version 4.2; CiA DS 401 Version 1.4
Interface		CAN Interface 2.0 A/B ISO 11898
Factory settings		Transmission rate: 250 kBit/s
USB		
Transmission rate		< 480 MBit/s
Version		2.0
Operating conditions		
Ambient temperature	[°C]	-30...65
Note on ambient temperature		2000 m: -30...65 °C
		3000 m: -30...61 °C
		4000 m: -30...60 °C
		5000 m: -30...58 °C
		The mainboard temperature must not exceed 80 °C.
		for further information please see the operating instructions
Storage temperature	[°C]	-30...85
Max. relative air humidity	[%]	90; (non condensing)
Max. height above sea level	[m]	5000
Protection		IP 65; IP 67
Pollution degree		2; (before installation and when the device is replaced)
Chemical media	ISO 16750-5	AA, BA, BD, CC, DB, DC, DD, ED
		only one chemical permitted at a time
Tests / approvals		
EMC	UN/ECE-R10 Noise emission and noise interference:	100 V/m
	DIN EN 61000-6-2	
	DIN EN 61000-6-4	
	DIN EN 13766-1	
	ISO 10605 ESD	
	noise immunity ISO 11452-1	
	ISO 7637-2 pulse 1	severity level 4 / function state C (24 V)
	ISO 7637-2 pulse 2a	severity level 4 / function state A (24 V)
	ISO 7637-2 pulse 2b	severity level 4 / function state C (24 V)
	ISO 7637-2 pulse 3a	severity level 4 / function state A (24 V)
	ISO 7637-2 pulse 3b	severity level 4 / function state A (24 V)
	ISO 16750-2 pulse 4	severity level 4 / function state A (12 V)
	ISO 16750-2 pulse 4	severity level 4 / function state A (24 V)
	ISO 16750-2 pulse 5	severity level 3 / function state C (24 V)
	ISO 16750-2 pulse 4	severity level 4 / function state A (12 V)
Continuous shock resistance	ISO 16750-3	30 g 6 ms / 24000 shocks
Fast temperature changes	EN 60068-2-30 damp heat: cyclical	55 °C upper temperature limit / 6 cycles
	EN 60068-2-78 damp heat: constant	40 °C 93 % rH / test period 21 days

CR1141



Programmable Human Machine Interface

ecomatDisplay/4.3"/STD./U

Vibration resistance	ISO 16750-3 Test VII EN 60068-2-6 sine	random, mounting place car body 10...500 Hz / 0.72 mm / 10 g 10 cycles/axis, sine
Salt spray test	EN 60068-2-52 Salt spray	severity level 3 / motor vehicle
MTTF [years]	112	
Railway applications	DIN EN 50155 Pkt 12.2	
	EN 50121-3-2	
	EN 55016	

Mechanical data

Weight [g]	439.05	
Type of mounting	panel/surf.; installation in panels or panel cutouts; (panel cutout: 114 x 99 mm)	
Dimensions [mm]	125.1 x 110 x 41.3	
Material	housing: diecast aluminium powder-coated; Display: glass anti-reflective and hardened; rear of the housing: plastics; diaphragm: Gore-Tex	
Information on service life	Pushbuttons:	750000 Betätigungen
	Navigation key with pushbutton:	750000 Betätigungen
	Display LED lifetime:	> 50000 h

Displays / operating elements

Display	Status LED	1 LED, multi-color freely programmable
Operating elements	6	freely programmable backlit function keys
	1	navigation key with central confirmation button
Display resolution	800 x 480	
Display type	Color display	
Display size	4.3"	
Aspect ratio	16:10	
Display background illumination	LED	
Color depth	24 Bit	
Brightness [cd/m²]	1000; (adjustable: 0...100 %; In steps of: 1 %)	
Contrast ratio	800:1	

Hardware

Processor	ARM Dual Core 64 Bit 1,4 GHz	
Working memory	1 GByte RAM	
Mass storage	4 GByte Flash	
Non-volatile memory	8 kByte	

Data memory

Real-time clock	yes; UTC, battery buffered
-----------------	----------------------------

Remarks

Pack quantity	1 pcs.
---------------	--------




Programmable Human Machine Interface

ecomatDisplay/4.3"/STD./U

Electrical connection - CAN


Connector: 1 x M12; coding: A; Contacts: 5



- 1: Service
- 2: VBB30
- 3: GND
- 4: CAN_H
- 5: CAN_L

Electrical connection - USB

Connector: 1 x M12; coding: B; Contacts: 5



- 1: + 5 V DC
- 2: - Data
- 3: + Data
- 4: ID
- 5: GND
- SCREEN: FE screen connected to plug