


DF1100



Power supply module for electronic circuit breaker

Fuse/Standard/24VDC/Module

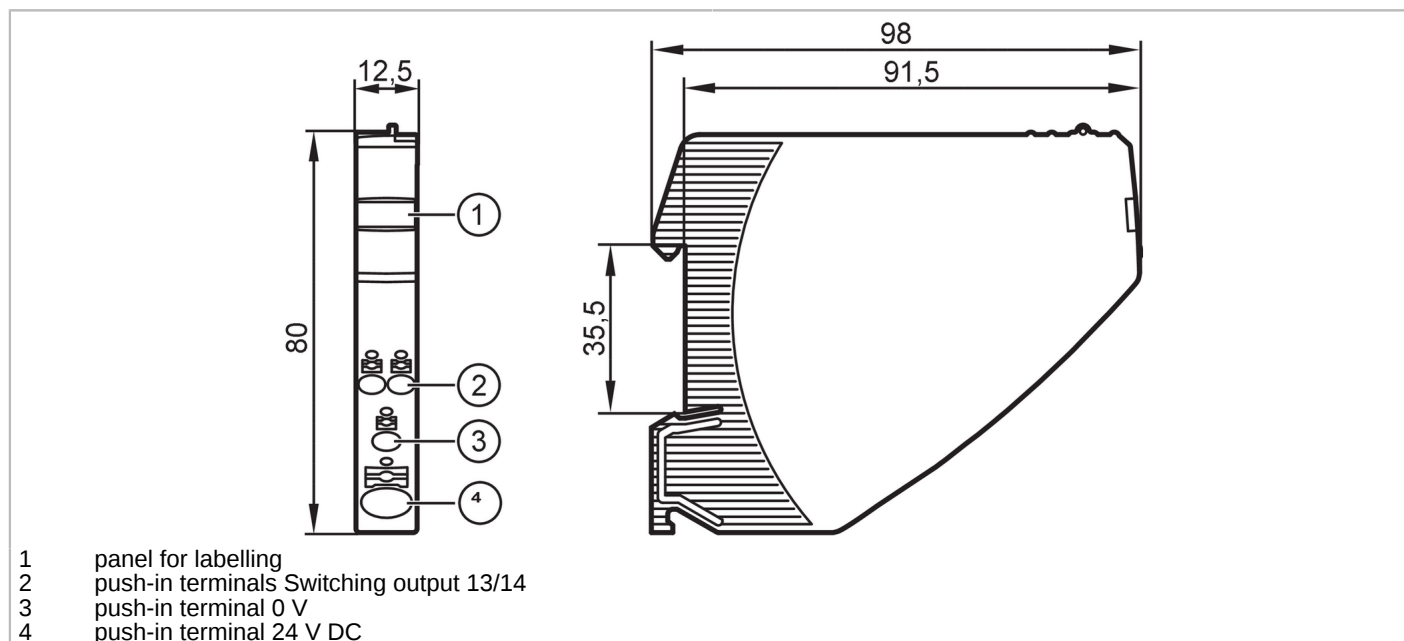

Application

Design

housing for DIN rail mounting

Electrical data

Operating voltage [V]	to SELV/PELV
Nominal voltage DC [V]	24
Input voltage DC [V]	19.2...30
Protection class	III
Reverse polarity protection	yes
Mains buffering time (nominal voltage 24 V DC) [ms]	10
Input current (nominal voltage 24 V DC) [A]	40
Closed-circuit current [mA]	10
Power loss (nominal voltage 24 V DC) [W]	0.24

Operating conditions

Ambient temperature [°C]	-25...60
Storage temperature [°C]	-40...70
Protection	IP 20; (on the front)
Pollution degree	2

Tests / approvals

EMC	EN 61000-6-3	radiation of interference
	EN 61000-6-2	noise immunity

Mechanical data

Weight [g]	67
Housing	rectangular
Type of mounting	Mounting on DIN rail; (TH35 (EN 60715))

DF1100



Power supply module for electronic circuit breaker

Fuse/Standard/24VDC/Module

Dimensions	[mm]	80 x 12.5 x 98
------------	------	----------------

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

push-in terminals:
contact lever/strip:

Connection

