


DF1210



Electronic circuit breaker

Fuse/Standard/24VDC/10A

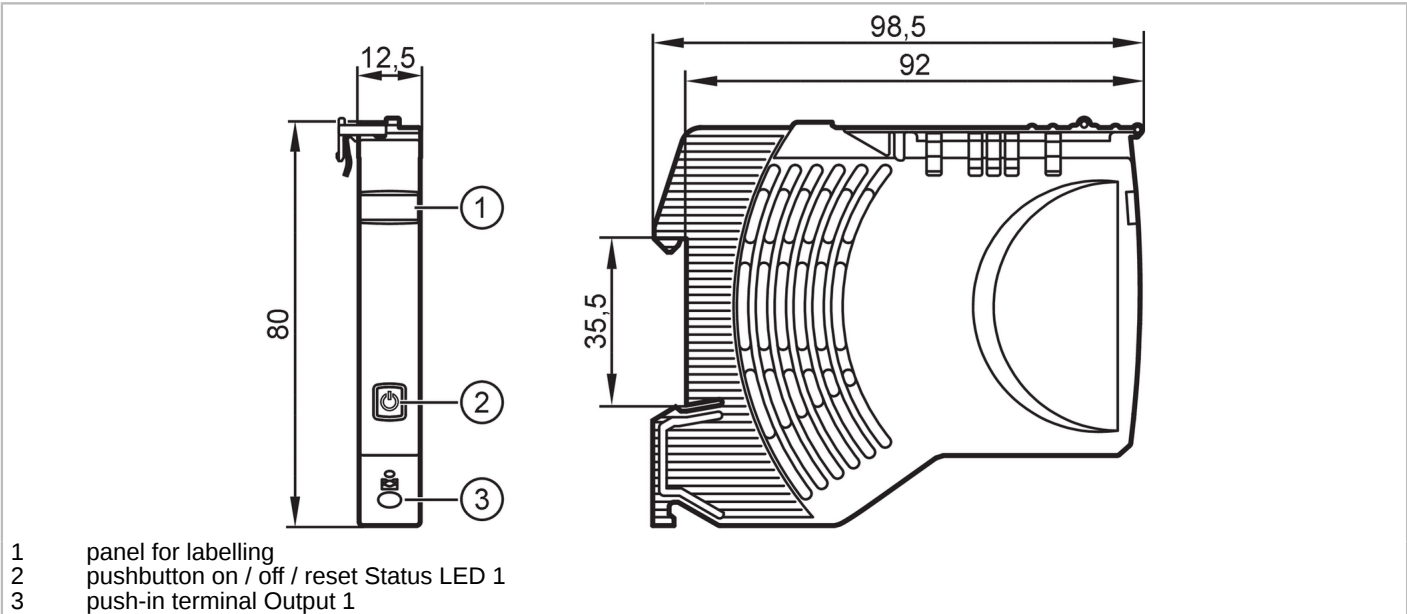

Application

Design

housing for DIN rail mounting

Electrical data

Operating voltage	[V]	to SELV/PELV
Nominal voltage DC	[V]	24
Input voltage DC	[V]	18...30
Protection class		III
Mains buffering time (nominal voltage 24 V DC)	[ms]	10
Closed-circuit current	[mA]	5
Power loss (nominal voltage 24 V DC)	[W]	1.992
Number of channels		1
Nominal current	[A]	10
Nominal current (Fail Safe Element)	[A]	10

Outputs

Load capacitance, total	[mF]	20
-------------------------	------	----

Operating conditions

Ambient temperature	[°C]	-25...60
Storage temperature	[°C]	-40...70
Protection		IP 20; (on the front)
Pollution degree		2

Tests / approvals

EMC	EN 61000-6-3	radiation of interference
	EN 61000-6-2	noise immunity

DF1210




Electronic circuit breaker

Fuse/Standard/24VDC/10A

Mechanical data		
Weight	[g]	67.5
Housing		rectangular
Type of mounting		Mounting on DIN rail; (TH35 (EN 60715))
Dimensions	[mm]	80 x 12.5 x 98.5
Displays / operating elements		
Display	status	1 x LED, red / green / orange
Operating elements	1 x	pushbuttons
Remarks		
Pack quantity		1 pcs.

Electrical connection	
push-in terminals:	
contact lever/strip:	
Connection	

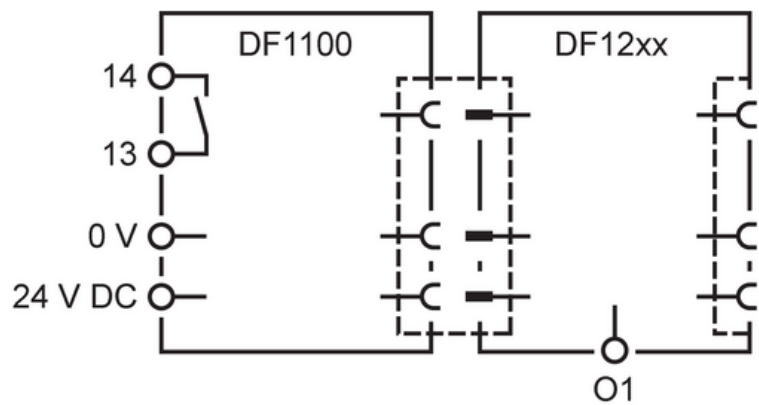

Diagrams and graphs	
Output curve	24 V DC, 23 °C Switch-off time [s] Multiples of nominal current Time-current characteristics