


DN4237



Switched-mode power supply 24 V DC

PSU-3AC/24VDC-20A/IOL/IP67

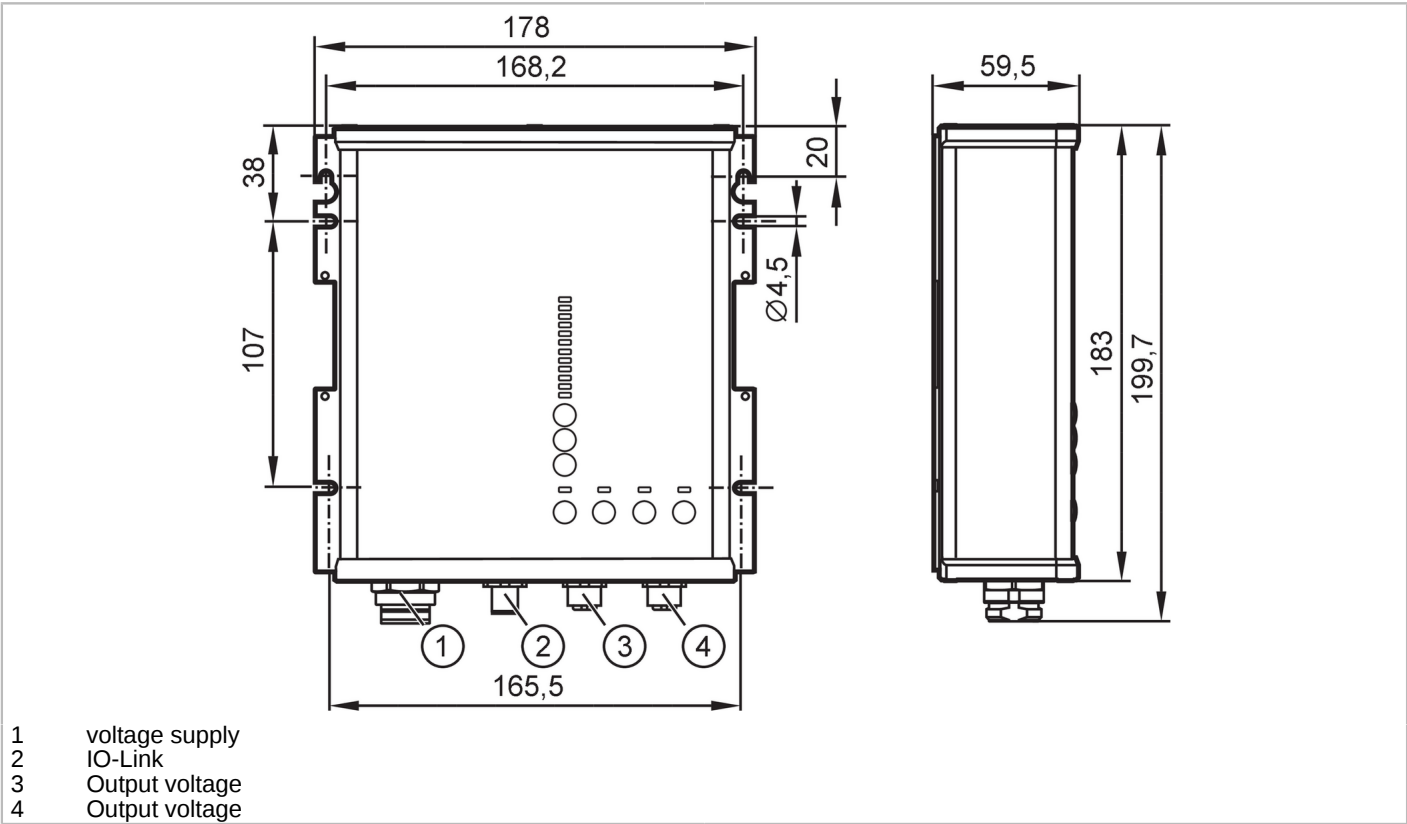

Electrical data		
Nominal voltage AC	[V]	400 / 480
Nominal frequency AC	[Hz]	50...60
Input voltage range AC	[V]	323...552
Output voltage DC	[V]	24...28
Protection class		I
Max. power-on delay time	[ms]	2000
Output voltage tolerance	[%]	0.2
Max. output current at min. output voltage	[A]	20.8
Max. output current at max. output voltage	[A]	17.8
Output power (permanent)	[W]	500
Output power (peak)	[W]	1000
Power factor (nominal voltage 400 V AC / 50 Hz)		0.94
Power factor (nominal voltage 480 V AC / 50 Hz)		0.95
Number of output circuits		4
Switch-on peak current (nominal voltage 400 V AC / 60 Hz)	[A]	2.1
Switch-on peak current (nominal voltage 480 V AC / 50 Hz)	[A]	2



Switched-mode power supply 24 V DC

PSU-3AC/24VDC-20A/IOL/IP67

Efficiency (nominal voltage 400 V AC / 60 Hz)	[%]	94.2
Efficiency (nominal voltage 480 V AC / 50 Hz)	[%]	94
Mains buffering time (nominal voltage 400 V AC / 60 Hz)	[ms]	24
Mains buffering time (nominal voltage 480 V AC / 50 Hz)	[ms]	24
Input current (nominal voltage 400 V AC / 60 Hz)	[A]	1.1
Input current (nominal voltage 480 V AC / 50 Hz)	[A]	0.9

Outputs

Load capacitance, total	[mF]	12.5
-------------------------	------	------

Interfaces

Communication interface	IO-Link	
Transmission type	COM3 (230,4 kBaud)	
IO-Link revision	1.1	
Profiles	Common - I&D	Identification and Diagnosis
SIO mode	yes	
Required master port class	A	
Min. process cycle time	[ms]	2
Supported DeviceIDs	Type of operation	DeviceID
	default	1270

Operating conditions

Ambient temperature	[°C]	-25...70
Storage temperature	[°C]	-40...85
Max. relative air humidity	[%]	95; (relative humidity)
Max. height above sea level	[m]	5000
Protection	IP 65; IP 67	
Pollution degree	3	



Switched-mode power supply 24 V DC

PSU-3AC/24VDC-20A/IOL/IP67

Tests / approvals		
EMC	EN 61000-4-2 CD	8 kV / Failure criterion A
	EN 61000-4-2 AD	15 kV / Failure criterion A
	EN 61000-4-3	80 Mhz...2.7 GHz / 20 V/m Failure criterion A
	EN 61000-4-3	2.7 GHz...6 GHz kV / 10 V/m Failure criterion A
	EN 61000-4-8	50 / 60 Hz / 30 A/m Failure criterion A
	EN 61000-4-4 Burst	4 kV / Failure criterion A
	EN 61000-4-5 Surge	2 kV Lx / Ly / Failure criterion A
	EN 61000-4-5 Surge	4 kV L / PE / Failure criterion A
	EN 61000-4-5 Surge	1 kV + / - / Failure criterion A
	EN 61000-4-5 Surge	1 kV + - / PE / Failure criterion A
	EN 61000-4-5 Surge	1 kV + - / PE / Failure criterion A
	EN 61000-4-5 Surge	1 kV DC-OK / PE / Failure criterion A
	EN 61000-4-6	0.15...80 MHz / 20 V Failure criterion A
	EN 61000-4-11	0 V up to 1 cycle / Failure criterion A
	EN 61000-4-11	40 % of V / 200 ms Failure criterion A
	EN 61000-4-11	70 % of V / 500 ms Failure criterion A
	EN 61000-4-11	0 V / 5000 ms Failure criterion C
	VDE 0160	1550 V / 1.3 ms Failure criterion A
	EN 55032	Class B
	EN 55032	Class B
	EN 55011	Class B
	EN 61000-3-2	
	EN 61000-3-3	
Continuous shock resistance	IEC 60068-2-27	30 g 6 ms / 20 g 11 ms
Vibration resistance	IEC 60068-2-6	2...17.8 Hz $\pm$ 1.6mm / 17.8...500 Hz 2 g
MTTF [years]		27
Mechanical data		
Weight [g]		1616.05
Housing		rectangular
Type of mounting		Backplane mounting
Dimensions [mm]		199.7 x 178 x 59.5
Material		housing: Aluminum Alloy; housing cap: PC; screws: steel bronzed
Remarks		
Pack quantity		1 pcs.
Electrical connection - IO-Link		
Connector: 1 x M12; coding: A; Contacts: 4; Locking: brass		
		
1:	voltage supply L+	
2:	n.c.	
3:	voltage supply L-	
4:	IO-Link	

Switched-mode power supply 24 V DC

PSU-3AC/24VDC-20A/IOL/IP67

Electrical connection - Output voltage

Connector: 2 x M12; coding: L; Contacts: 5; Locking: brass



1:	US
2:	GND UA
3:	GND US
4:	UA
5:	FE

Electrical connection - voltage supply


Connector: 1 x 7/8"; Locking: brass



1:	L1
2:	N
3:	PE
4:	L2
5:	L3

Diagrams and graphs

Block diagram

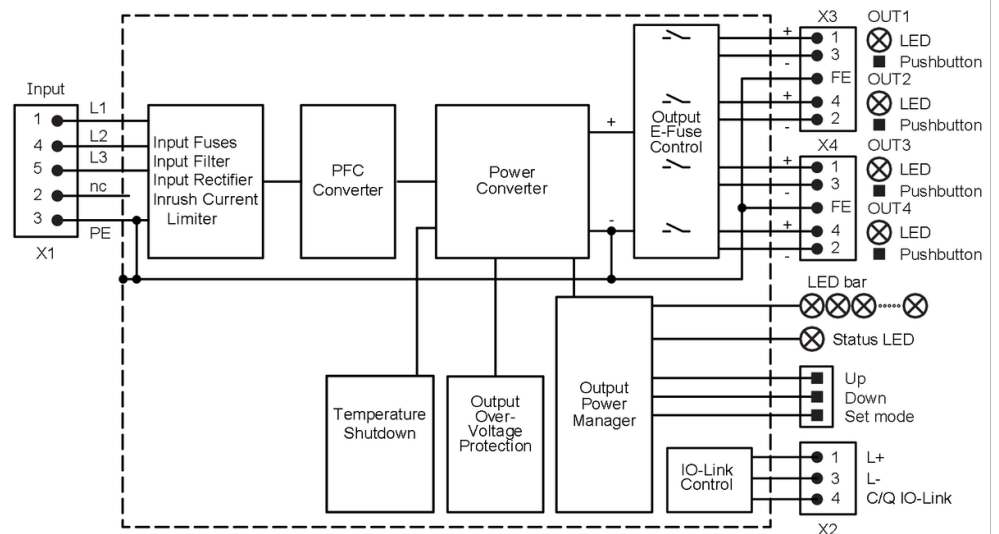


DN4237




Switched-mode power supply 24 V DC

PSU-3AC/24VDC-20A/IOL/IP67

Output curve

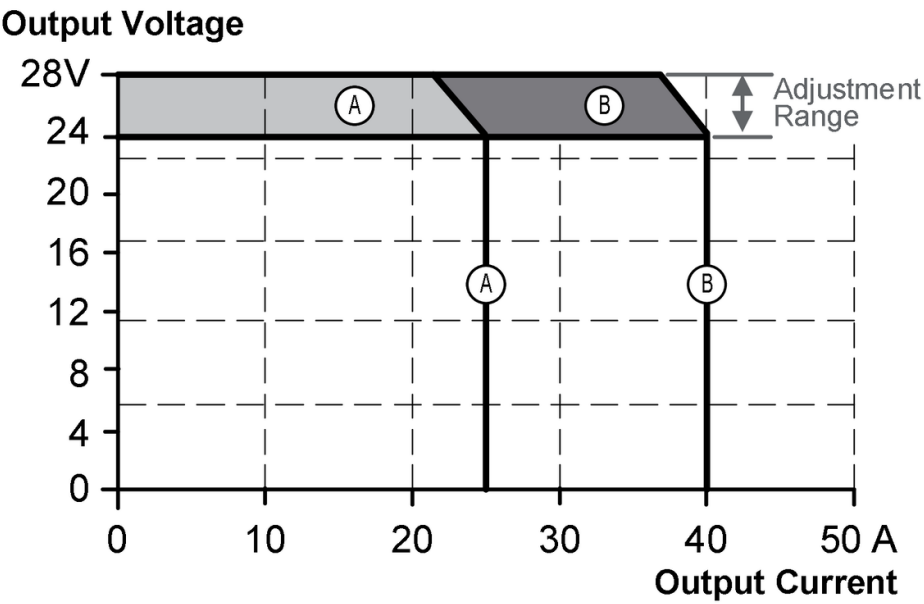

Characteristic curve for degree of efficiency / power loss

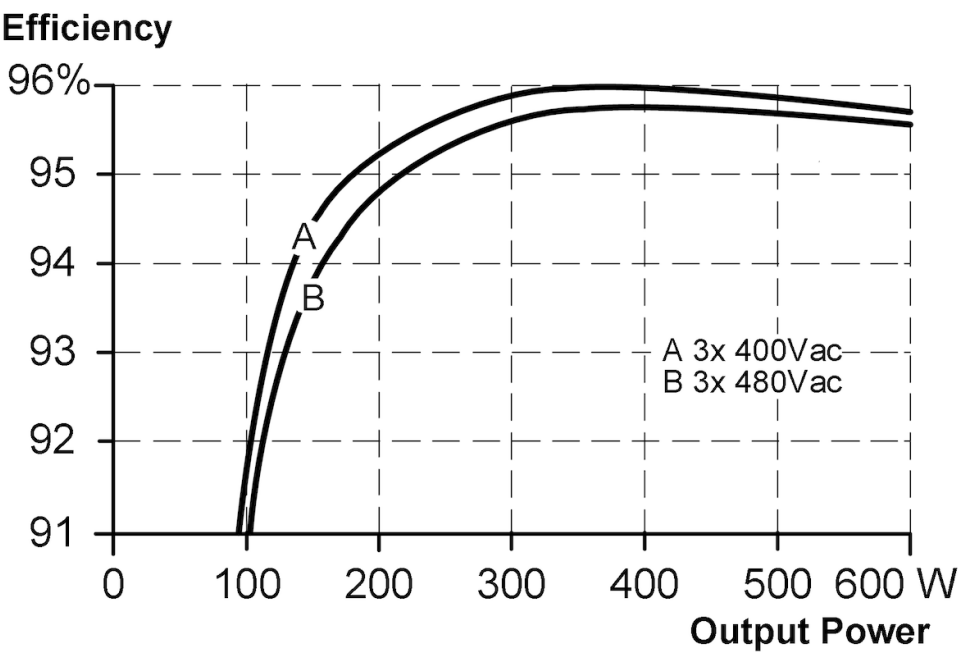


DN4237



Switched-mode power supply 24 V DC

PSU-3AC/24VDC-20A/IOL/IP67

Characteristic curve for derating

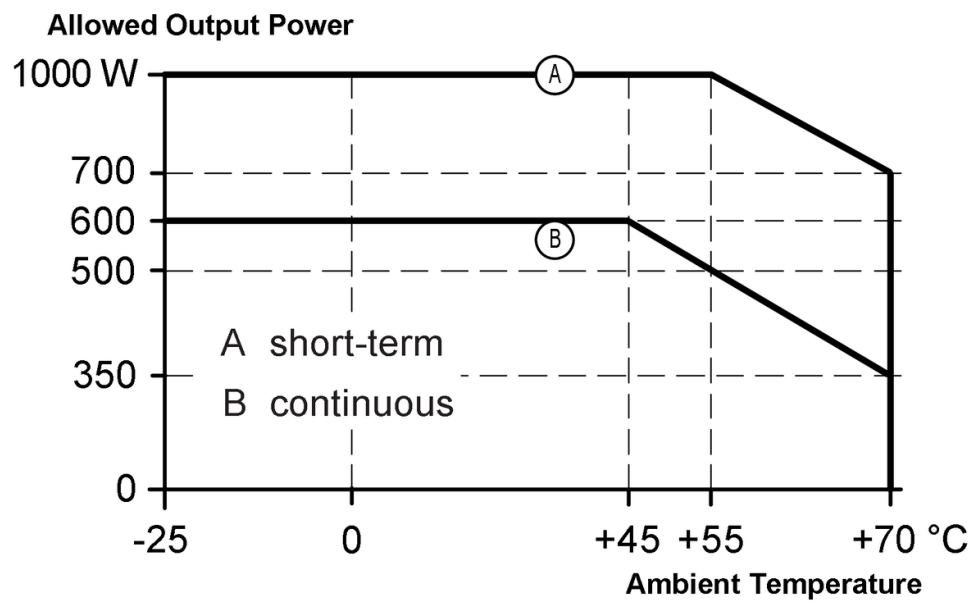

Characteristic curve for mains buffering time

