


DTE905



Compact RFID device

DTRUHFA HLRWITUS04

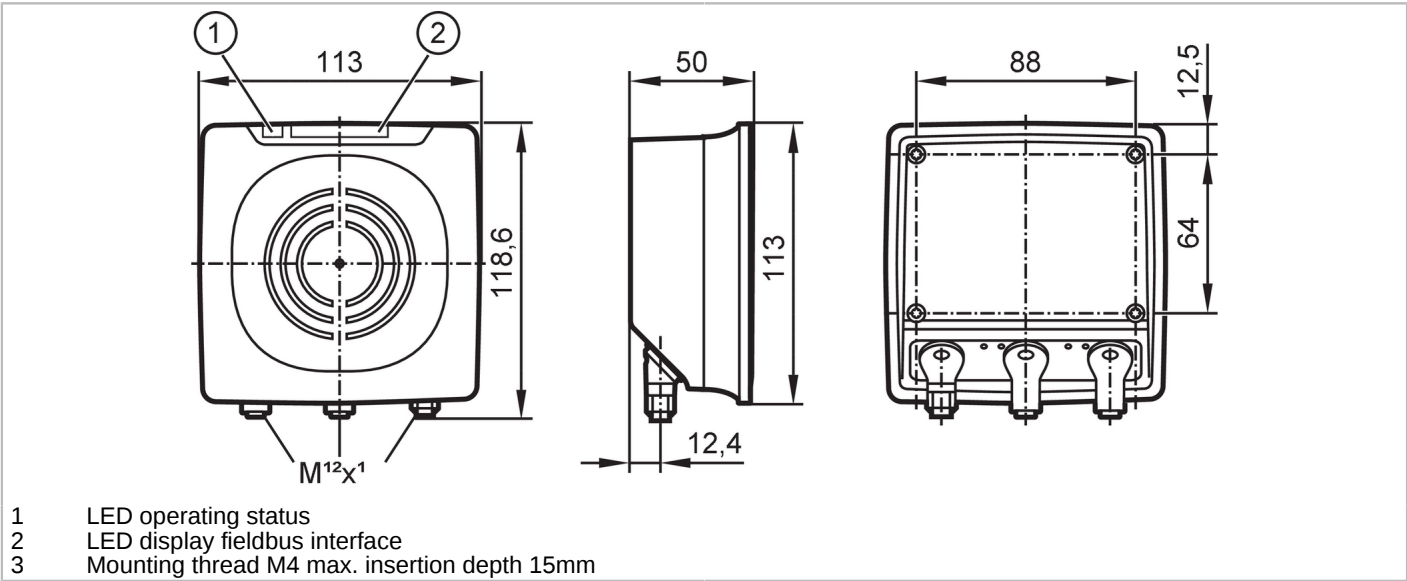

Application		
Radio approval for	USA; Canada; Mexico	
Electrical data		
Operating voltage	[V]	19.2...28.8 DC
Current consumption	[mA]	500
Power consumption	[W]	8.6
Protection class		III
Operating frequency	[MHz]	902...928
RFID standard		EPC Class1 GEN2/ISO 18000-63
Transmission power EIRP	[mW]	200; (maximum: 250 mW)
Inputs / outputs		
Number of inputs and outputs	Number of digital outputs: 2	
Outputs		
Total number of outputs		2
Electrical design		push-pull
Number of digital outputs		2
Max. voltage drop switching output DC	[V]	2
Max. current load per output	[mA]	100; (max.)
Short-circuit protection		yes
Overload protection		yes
Interfaces		
Communication interface	Ethernet	
Ethernet - Internet of Things		
Transmission standard	10Base-T; 100Base-TX	
Transmission rate	10 MBit/s; 100 MBit/s	
Protocol	MQTT JSON	

DTE905



Compact RFID device

DTRUHFA HLRWITUS04

Factory settings	IP address: 192.168.0.79
	subnet mask: 255.255.255.0
	gateway IP address: 192.168.0.100
Usage type	Parameter setting; Data transmission

Operating conditions

Ambient temperature	[°C]	-20...55
Note on ambient temperature	with mounting plate and cooling element: -20...60 °C	
Storage temperature	[°C]	-25...80
Protection	IP 67	

Tests / approvals

Shock resistance	IEC 60028-2-27	40 g (6 ms) / bump
		50 g (11 ms) / single shock
Vibration resistance	EN 60068-2-6	2 g (10...150 Hz)
MTTF	[years]	56

Mechanical data

Weight	[g]	692.7
Dimensions	[mm]	113 x 118.6 x 50
Material	lower part: aluminum; Upper part: PBT / PC; plug: stainless steel	

Displays / operating elements


Display	voltage supply	1 x LED, green
	LED display	4 x LED, yellow signal strength ID tag
	status	2 x LED, green/red fieldbus interface
	status	2 x LED, green/yellow Ethernet

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection - Ethernet

Connector: 2 x M12; coding: D; Contacts: 4




ETH1 / ETH2

1	TD+
2	RD+
3	TD-
4	RD-

Electrical connection - voltage supply

Connector: 1 x M12; coding: A; Contacts: 5



PWR

1	L+
2	digital input/output 2
3	L-
4	digital input/output 1
5	not used