


DV3007



Buzzer

LED-Stack/Buzzer-Segment

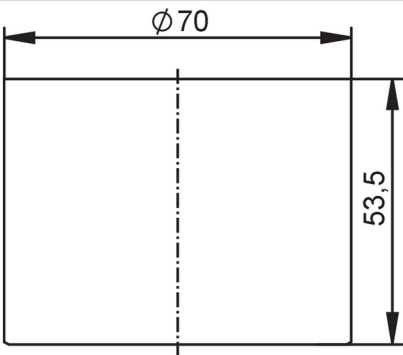

buzzer



Application		
Application		signaling machine conditions
Electrical data		
Operating voltage	[V]	18...30 DC; (to SELV/PELV)
Nominal voltage DC	[V]	24
Current consumption	[mA]	< 250
Operating conditions		
Ambient temperature	[°C]	-20...50
Storage temperature	[°C]	-30...60
Max. relative air humidity	[%]	90
Max. height above sea level	[m]	2000
Protection		IP 65
Mechanical data		
Weight	[g]	98.1
Dimensions	[mm]	Ø 70 / L = 53.5
Material		housing: ABS black
Displays / operating elements		
Acoustic signal		buzzer
Max. sound pressure	[dB]	90
Remarks		
Remarks	Further information is available in the manual.	
Pack quantity	1 pcs.	