


DX2051



Multifunction display for monitoring analog standard signals

DISPLAY/AX460/DC

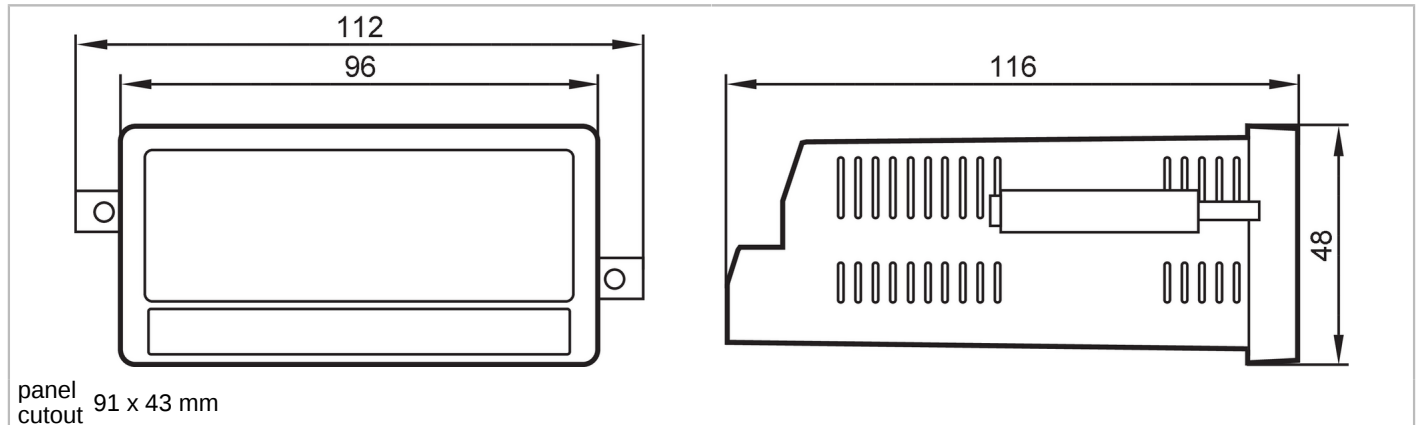

Product characteristics

Housing	rectangular
Dimensions [mm]	48 x 112 x 116

Application

Application	displaying and monitoring analog signals; e.g. pressure sensors, temperature sensors or flow sensors
-------------	--

Electrical data

Operating voltage [V]	18...30 DC
Current consumption [mA]	100

Inputs / outputs

Number of inputs and outputs	Number of analog inputs: 2
------------------------------	----------------------------

Inputs

Number of analog inputs	2; (Spannungs- oder Stromeingang)
Analog input (current) [mA]	0...20
Analog input (voltage) [V]	-10...10
Resolution of analog input	16 bit
Precision analog input [%]	0,1

Operating conditions

Ambient temperature [°C]	-20...60
Storage temperature [°C]	-25...70
Protection	IP 65
Protection rating terminals	IP 20

Tests / approvals

EMC	EN 61000-6-2	
	EN 61000-6-3	
	EN 61000-6-4	

Mechanical data

Weight [g]	300.5
Housing	rectangular
Type of mounting	installation in panels or panel cutouts; (panel cutout: 91 x 43 mm)
Dimensions [mm]	48 x 112 x 116

DX2051



Multifunction display for monitoring analog standard signals

DISPLAY/AX460/DC

Material	housing: Noryl UL94-V-0
----------	-------------------------

Displays / operating elements

Display	Color display	full graphic LCD display, Touch screen
---------	---------------	--

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

screw terminals:

Connection

NC