


E10437



Y/T splitter


ZDO2H040MSS0005H05

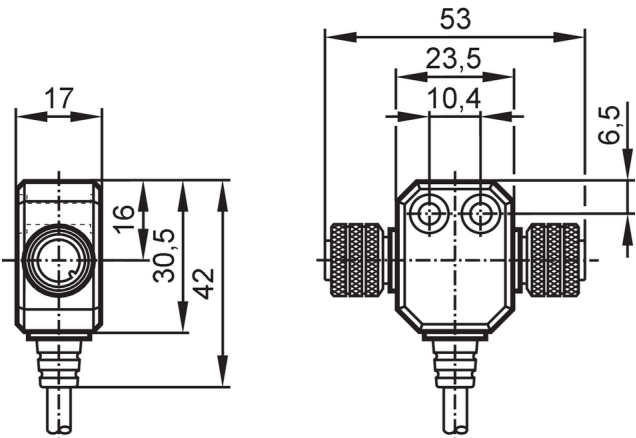

Application		
Special feature		Free from silicone; Halogen-free; gold-plated contacts
Application		Industrial applications
Free from silicone		yes
Electrical data		
Operating voltage	[V]	10...55 DC
Max. current load per module/slot	[A]	4
Max. current load total	[A]	4
Operating conditions		
Ambient temperature	[°C]	-25...80
Protection		IP 67
Mechanical data		
Weight	[g]	160.7
Molded-body material		TPU (urethane)
Material nut		brass, nickel-plated
Number of ports splitter box		2
Connector type		M12
Remarks		
Pack quantity		1 pcs.

Electrical connection	
Cable: 5 m, PUR, Halogen-free, black, Ø 5 mm; 4 x 0.25 mm ² (32 x Ø 0.1 mm)	

Electrical connection - Socket	
Connector: 2 x M12; coding: A; Contacts: 3, gold-plated; Moulded body: TPU (urethane); Locking: brass, nickel-plated; Tightening torque: 0.5 Nm	



E10437



Y/T splitter

ZDO2H040MSS0005H05

Connection		
	BN	1 (1...2)
	BU	3 (1...2)
	BK	4 (1)
	WH	4 (2)
BK =	Core colors :	
BN =		
BU =		
WH =		
	black	
	brown	
	blue	
	white	