


E11510



Female wirable connectors

SDOAH042MSSFKPG

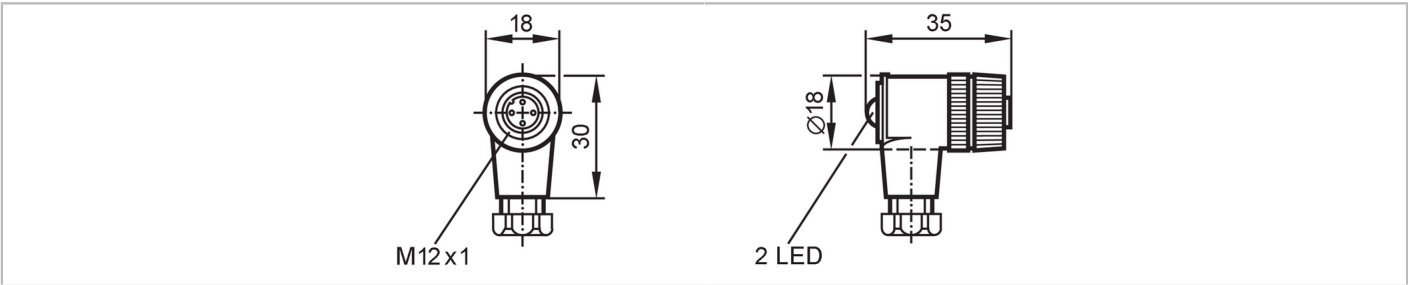

Application		
Special feature	Free from silicone; gold-plated contacts	
Application	Industrial applications	
Free from silicone	yes	
Electrical data		
Operating voltage	[V]	10...30 DC
Max. current load total	[A]	4; (...40 °C)
Outputs		
Electrical design	PNP	
Operating conditions		
Ambient temperature	[°C]	-25...85
Protection	IP 68	
Mechanical data		
Weight	[g]	28.6
Dimensions	[mm]	30 x 18 x 35
Molded-body material	PA	
Material nut	brass, nickel-plated	
Displays / operating elements		
Display	Switching status	1 x LED, yellow
	Power	1 x LED, green
Remarks		
Pack quantity	1 pcs.	
Electrical connection		
screw terminals: ...0.75 mm²; Cable sheath: Ø 4...6 mm		
Electrical connection - Socket		
Connector: 1 x M12, angled; coding: A; Contacts: 4, gold-plated; Moulded body: PA; Locking: brass, nickel-plated		
		

E11510



Female wirable connectors

SDOAH042MSSFKPG

Connection

