

E11512




Female wirable connectors

SDOAH050MSSFKPG

Article to be discontinued

Alternative articles: EVC815

When selecting an alternative article and accessories please note that technical data may differ!

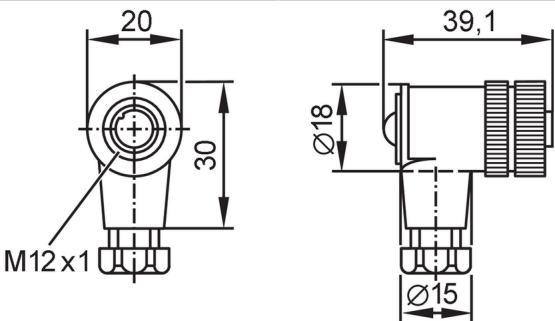

Application

Special feature

Free from silicone; gold-plated contacts

Application

Industrial applications

Free from silicone

yes

Electrical data

Operating voltage

[V]

< 45 AC / < 70 DC

Max. current load total

[A]

4; (...40 °C)

Operating conditions

Ambient temperature

[°C]

-25...85

Protection

IP 68

Mechanical data

Weight

[g]

29.1

Dimensions

[mm]

39.1 x 20 x 30

Molded-body material

PA

Material nut

brass, nickel-plated

Remarks

Pack quantity


1 pcs.

Electrical connection

screw terminals: ...0.75 mm²; Cable sheath: Ø 4...6 mm

Electrical connection - Socket

Connector: 1 x M12, angled; coding: A; Contacts: 5, gold-plated; Moulded body: PA; Locking: brass, nickel-plated



E11512



Female wirable connectors

SDOAH050MSSFKPG

Connection

