


E11572



Connection cable

VDOGQ090PLS0003E03STGF040MSS

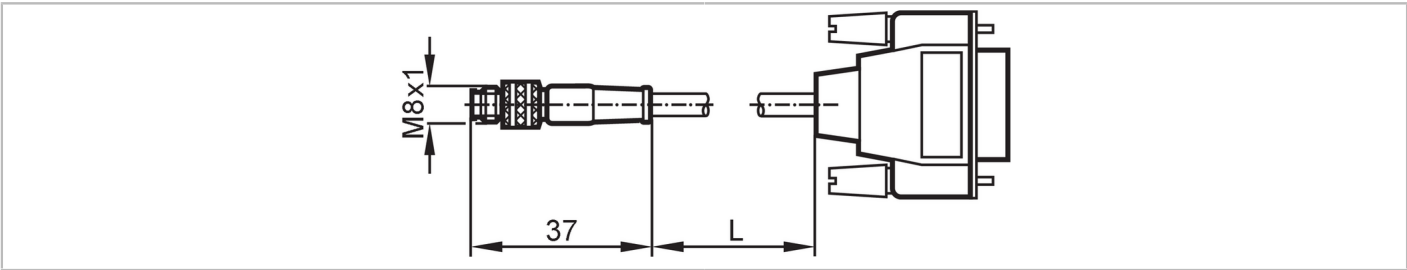

Application

Application	Industrial applications
-------------	-------------------------

Electrical data

Operating voltage	[V]	< 60 AC / < 75 DC
Protection class		III

Operating conditions

Ambient temperature	[°C]	-25...85
Protection		IP 50

Mechanical data

Weight	[g]	113.9
Molded-body material		PUR
Material nut		brass, nickel-plated

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection - plug


Connector: 1 x M8, straight; coding: A; Contacts: 4; Moulded body: PUR; Locking: brass, nickel-plated



Electrical connection

Cable: 3 m, PVC, black, Ø 5 mm; 3 x 0.25 mm² (32 x Ø 0.1 mm)

Connection

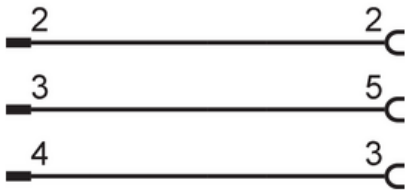

Electrical connection - Socket

Connector: 1 x Sub D, straight; Contacts: 3; Moulded body: PUR; Locking: brass, nickel-plated

