


E11589



Socket with CAN bus terminating resistor

SDOGH050ZDAFKPG

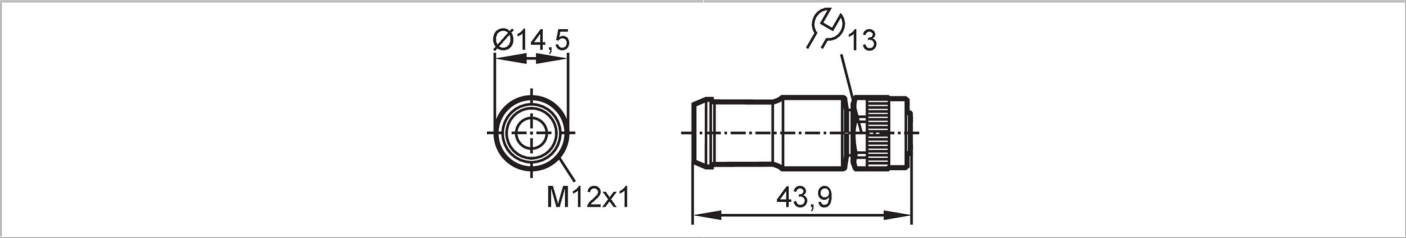

Application	
Application	CAN bus; for mobile applications
Operating conditions	
Ambient temperature	[°C] -40...85
Protection	IP 68
Mechanical data	
Weight	[g] 7.7
Dimensions	[mm] 14.5 x 14.5 x 43.9
Molded-body material	TPU (urethane)
Material nut	diecast zinc, nickel-plated
Sealing material	FKM
Remarks	
Remarks	The CAN bus terminating resistor (120 Ω) is integrated in the M12 connector.
Pack quantity	1 pcs.

Electrical connection - Socket

Connector: 1 x M12, straight; coding: A; Contacts: 5; Moulded body: TPU (urethane); Locking: diecast zinc, nickel-plated; sealing: FKM; Tightening torque: ...0.6 Nm

