


E11764



Female wirable connectors

SDOAH030MSSFKPG

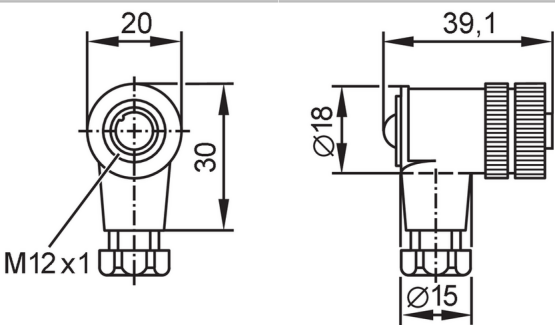


Application	
Special feature	Free from silicone; gold-plated contacts
Application	Industrial applications
Free from silicone	yes
Electrical data	
Operating voltage [V]	< 250 AC
Max. current load total [A]	4; (...40 °C)
Operating conditions	
Ambient temperature [°C]	-25...85
Protection	IP 67
Mechanical data	
Weight [g]	27.8
Dimensions [mm]	39.1 x 20 x 30
Molded-body material	PA
Material nut	brass, nickel-plated
Remarks	
Pack quantity	1 pcs.

Electrical connection

screw terminals: ...0.75 mm²; Cable sheath: Ø 4...6 mm

Electrical connection - Socket

Connector: 1 x M12, angled; coding: C; Contacts: 3, gold-plated; Moulded body: PA; Locking: brass, nickel-plated



Connection

