


E11795



Female wirable connectors

SDOAA030MSSFKPG

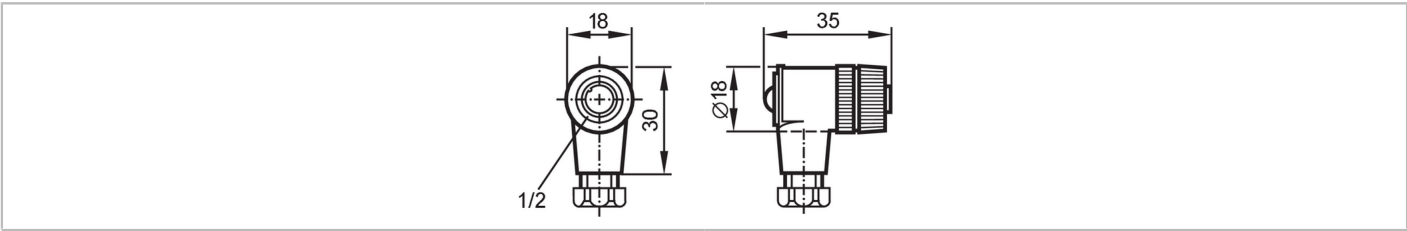


Application		
Special feature		Free from silicone; gold-plated contacts
Application		Industrial applications
Free from silicone		yes
Electrical data		
Operating voltage	[V]	< 250 AC
Max. current load total	[A]	4; (...40 °C)
Operating conditions		
Ambient temperature	[°C]	-25...85
Protection		IP 67
Mechanical data		
Weight	[g]	24.8
Dimensions	[mm]	35 x 20 x 30
Molded-body material		PA
Material nut		brass, nickel-plated
Remarks		
Pack quantity		1 pcs.

Electrical connection	
terminals: ...0.75 mm²; Cable sheath: Ø 4...6 mm	

Electrical connection - Socket	
--------------------------------	--

Connector: 1 x 1/2", angled; coding: C; Contacts: 3, gold-plated; Moulded body: PA; Locking: brass, nickel-plated



Connection	