


E11806



Female cordset

ADOAH080MSS0010C08

For 8-wire cordsets the core colors are not standardized.
Please note the wiring of the sensor and the cordsets (see data sheet).

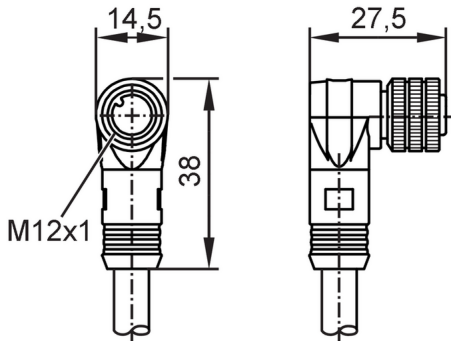

Application		
Special feature	Free from silicone; gold-plated contacts; screened cable	
Application	Industrial applications	
Free from silicone	yes	
Electrical data		
Operating voltage	[V]	< 30 AC / < 36 DC
Protection class	III	
Operating conditions		
Ambient temperature	[°C]	-25...80
Protection	IP 67	
Mechanical data		
Weight	[g]	682.5
Dimensions	[mm]	27.5 x 14.5 x 38
Molded-body material	PUR	
Material nut	brass, nickel-plated	
Remarks		
Pack quantity	1 pcs.	
Electrical connection		
Cable: 10 m, PUR, black, Ø 6.2 mm, screened; 8 x 0.25 mm²		
Electrical connection - Socket		
Connector: 1 x M12, angled; coding: A; Contacts: 8, gold-plated; Moulded body: PUR; Locking: brass, nickel-plated; Tightening torque: 0.7...0.9 Nm; Shielded connection cable: shield connected		
		


E11806



Female cordset

ADOAH080MSS0010C08

Connection

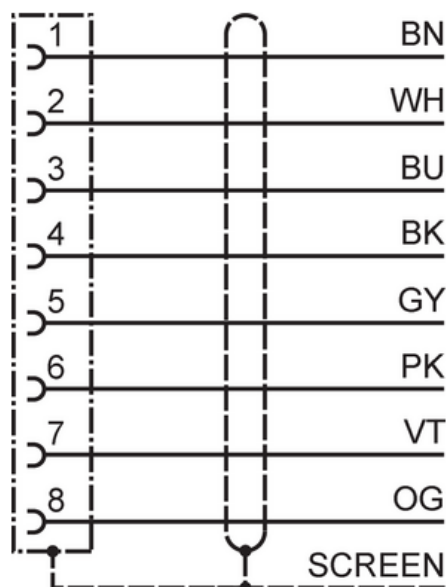

Colors to DIN EN 60947-5-2

Core colors :

BK =	black
BN =	brown
BU =	blue
GY =	grey
PK =	pink
OG =	orange
VT =	lilac
WH =	white
screen =	screen