


E11847



Wiring block

ProcessLine SB V4A 25m

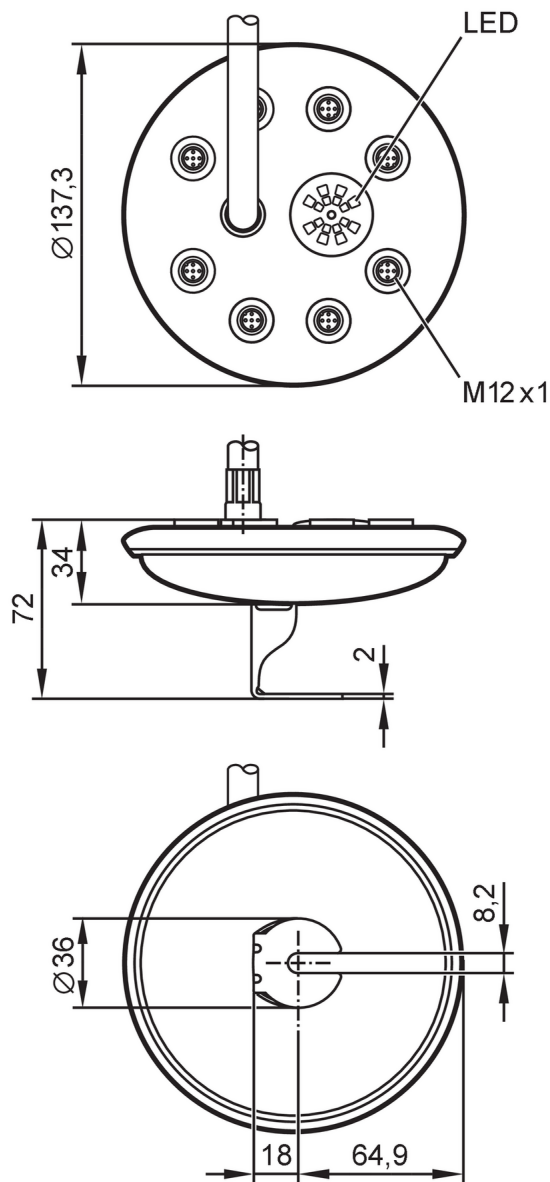

Application

Application

Industrial applications

Electrical data

Operating voltage	[V]	10...36 DC
Protection class		III
Max. current load per module/slot	[A]	4
Max. current load total	[A]	6

Outputs

Electrical design	PNP
-------------------	-----


Operating conditions

Ambient temperature	[°C]	-5...70
---------------------	------	---------



Wiring block

ProcessLine SB V4A 25m

Protection	IP 69K; (To ensure the protection rating unused sockets must be covered with the supplied protective caps.; Tightening torque: 1,3 Nm +/- 0,1 Nm)	
Tests / approvals		
MTTF	[years]	2487
Mechanical data		
Weight	[g]	5376
Housing	tubular	
Type of mounting	Mounting base	
Dimensions	[mm]	Ø 137.3 / L = 72
Material	threaded bush: stainless steel (1.4404 / 316L); LED-Fenster: PC; O-ring: EPDM; Protective cap: PP	
Molded-body material	stainless steel	
Number of ports splitter box	8	
Connector type	M12	
Displays / operating elements		
Display	Switching status	16 x LED, yellow
	Power	1 x LED, green
Accessories		
Items supplied	Protective caps: M12	
Remarks		
Remarks	external voltage supply according to PELV	
Pack quantity	1 pcs.	
Electrical connection		
Cable: 25 m, PUR / PVC, black, Ø 11 mm; 3 x 0.75 mm² + 16 x 0.34 mm²		
Electrical connection - slot		
Connector: 8 x M12; coding: A; Contacts: 4; Moulded body: stainless steel		
		


E11847



Wiring block

ProcessLine SB V4A 25m

Connection

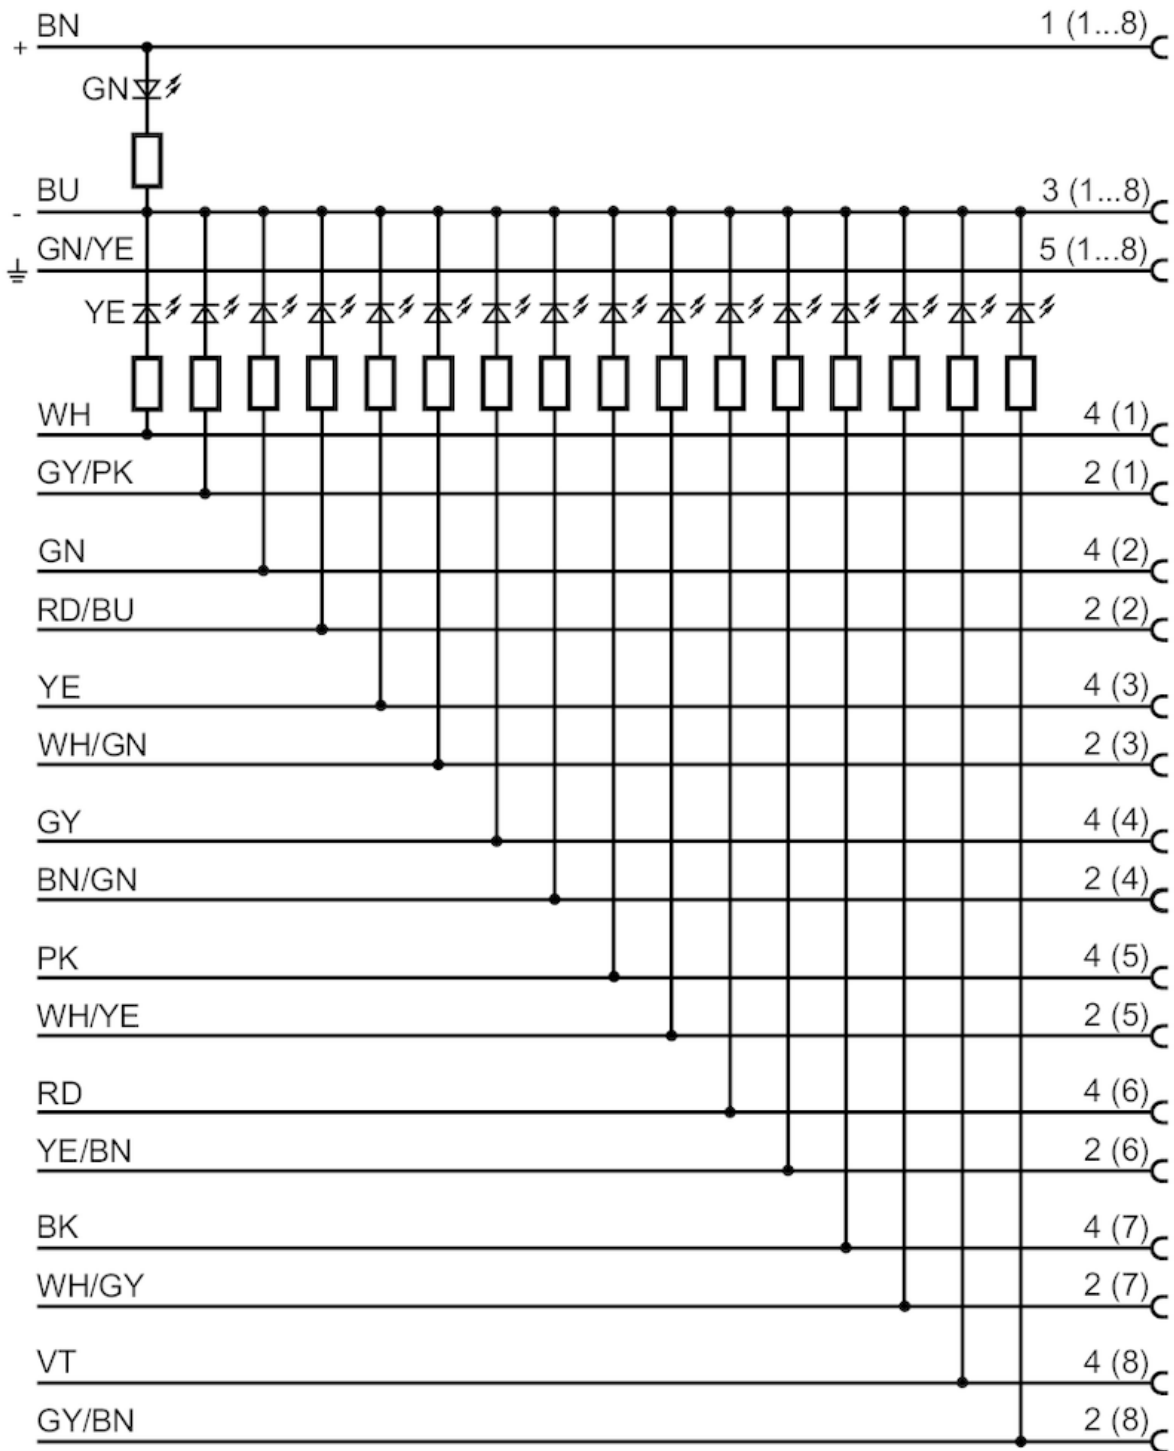

	Core colors :
BK =	black
BN =	brown
BU =	blue
GN =	green
GY =	grey
PK =	pink
RD =	red
VT =	lilac
WH =	white
YE =	yellow

E11847

Wiring block

ProcessLine SB V4A 25m

