


E12068



Y-splitter with valve plug

YVDAA042--S0003A03STGH050MSS

Article to be discontinued

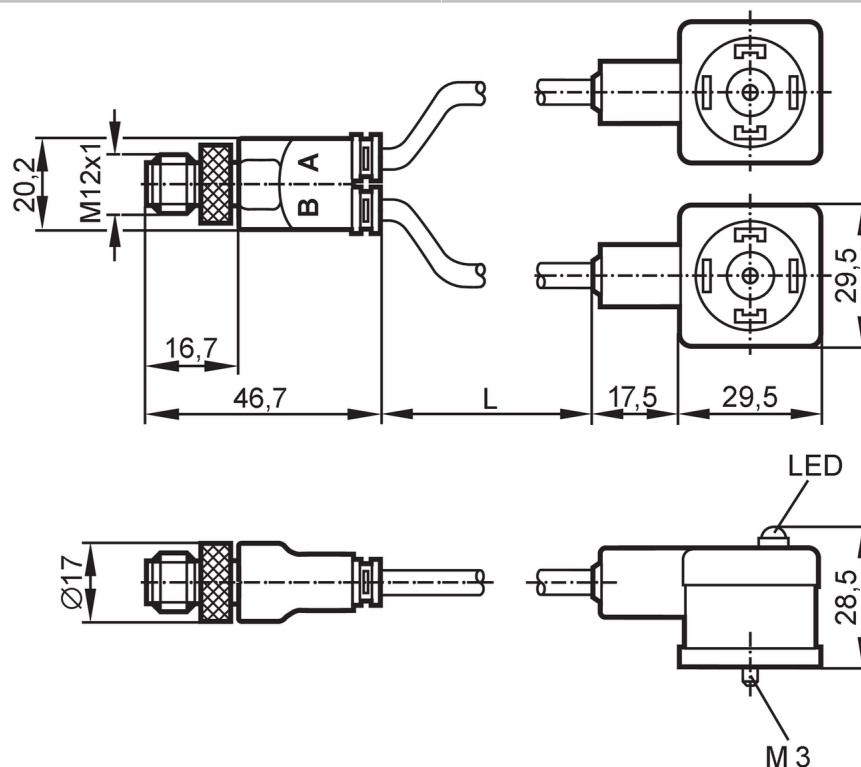

Application		
Special feature	Halogen-free	
Application	Industrial applications; Oils and coolants	
Electrical data		
Operating voltage	[V]	10...30 DC
Overtoltage protection	yes; (VDR)	
Operating conditions		
Ambient temperature	[°C]	-25...90
Protection	IP 65	
Mechanical data		
Weight	[g]	350.2
Material	housing: TPU (urethane)	
Molded-body material	TPU (urethane)	
Material nut	brass, nickel-plated	
Displays / operating elements		
Display	Switching status	2 x LED, yellow
Accessories		
Items supplied	screws: 2	
	panel for labelling: 2	

E12068



Y-splitter with valve plug

YVDAA042--S0003A03STGH050MSS


Remarks

Pack quantity


1 pcs.

Electrical connection - plug

Connection

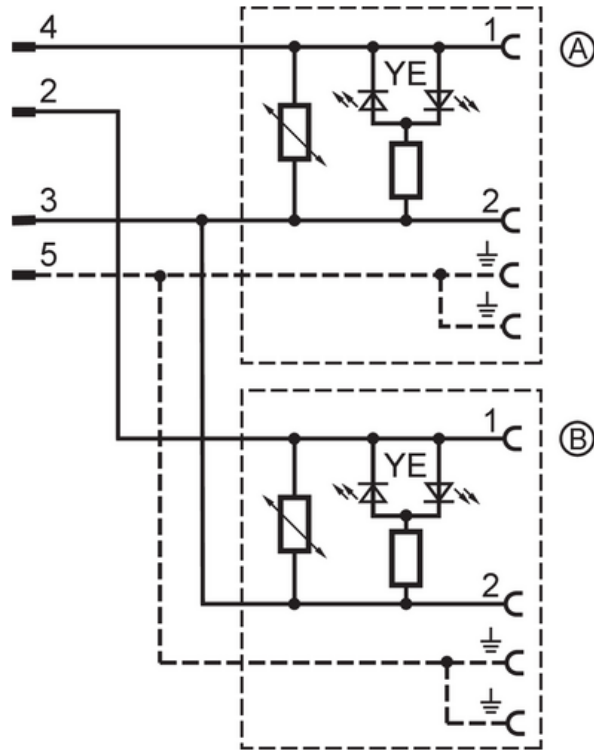

Connector: 1 x M12, straight; coding: A; Contacts: 5; Moulded body: TPU (urethane); Locking: brass, nickel-plated



Electrical connection - Socket A/B

Cable: 3 m, PUR, Halogen-free, black, Ø 4.8 mm; 3 x 0.5 mm² (16 x Ø 0.2 mm)

Connector: 2 x valve type A DIN, angled; Contacts: 4; Moulded body: TPU (urethane); Locking: brass, nickel-plated

