



E12215



All male cordsets

ASTGA050MSS0006C04

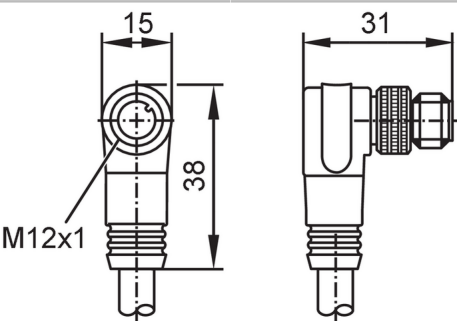

Application		
Special feature	Free from silicone; Halogen-free; gold-plated contacts; screened cable	
Application	for mobile applications	
Free from silicone	yes	
Electrical data		
Operating voltage	[V]	< 30 AC / < 36 DC
Protection class		II
Max. current load total	[A]	4
Operating conditions		
Ambient temperature	[°C]	-25...90
Protection		IP 68
Mechanical data		
Weight	[g]	378.8
Dimensions	[mm]	38 x 15 x 31
Molded-body material		TPU (urethane)
Material nut		brass, nickel-plated
Remarks		
Remarks	The CAN bus terminating resistor (120 Ω) is integrated in the M12 connector.	
Pack quantity	1 pcs.	
Electrical connection		
Cable: 6 m, PVC, Halogen-free, lilac, Ø 6.7 mm, screened; 2 x 0.34 mm ² / AWG 22 + 2 x 0.25 mm ² / AWG 24		
Electrical connection - plug		
Connector: 1 x M12, angled; coding: A; Contacts: 5, gold-plated; Moulded body: TPU (urethane), black; Locking: brass, nickel-plated; Shielded connection cable: shield not connected		
		


E12215



All male cordsets

ASTGA050MSS0006C04

Connection

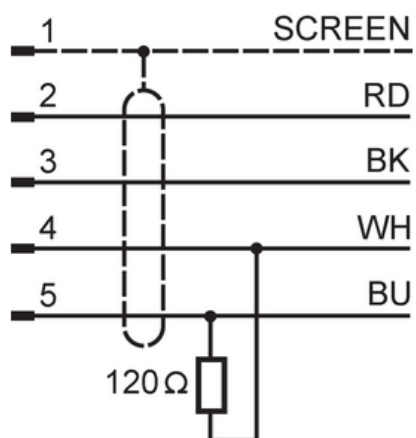

	Core colors :
BK =	black
BU =	blue
RD =	red
WH =	white
screen =	screen