


E12226



Ethernet connection cable

VSTAN040ZDS0002L04STGP040--S

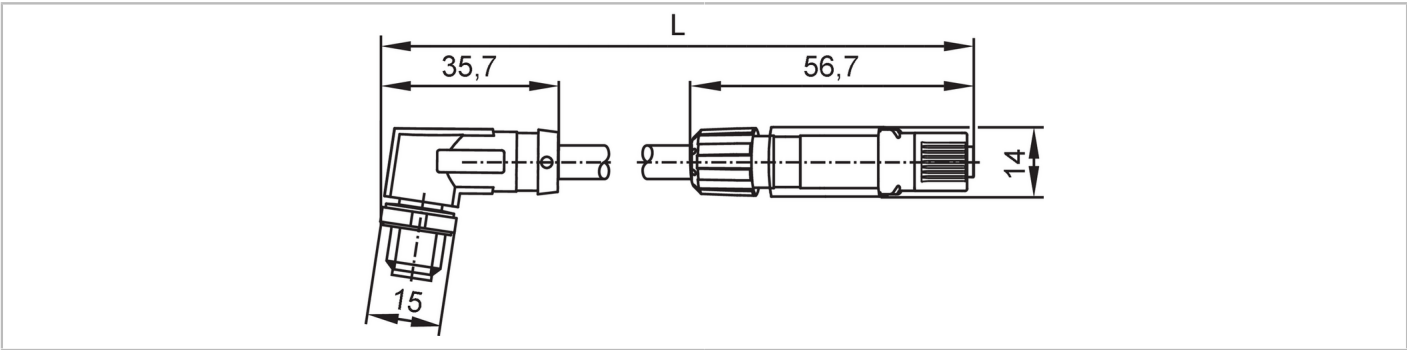

| Application                                                                                                                                                           |      |                                             |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|---------------------------------------------|
| Special feature                                                                                                                                                       |      | gold-plated contacts; screened cable        |
| Design                                                                                                                                                                |      | Ethernet cable, D-coded                     |
| Application                                                                                                                                                           |      | Cross-over patch cable                      |
| Electrical data                                                                                                                                                       |      |                                             |
| Operating voltage                                                                                                                                                     | [V]  | 48 AC / 60 DC                               |
| Protection class                                                                                                                                                      |      | III                                         |
| Max. current load total                                                                                                                                               | [A]  | 1                                           |
| Operating conditions                                                                                                                                                  |      |                                             |
| Ambient temperature                                                                                                                                                   | [°C] | -25...70                                    |
| Protection                                                                                                                                                            |      | IP 65; IP 67; (M12 plug / RJ45 plug: IP 20) |
| Mechanical data                                                                                                                                                       |      |                                             |
| Weight                                                                                                                                                                | [g]  | 161.6                                       |
| Molded-body material                                                                                                                                                  |      | TPU (urethane) / PA                         |
| Material nut                                                                                                                                                          |      | diecast zinc, nickel-plated                 |
| Remarks                                                                                                                                                               |      |                                             |
| Pack quantity                                                                                                                                                         |      | 1 pcs.                                      |
| Electrical connection - plug M12                                                                                                                                      |      |                                             |
| Connector: 1 x M12, angled; coding: D; Contacts: 4, gold-plated; Moulded body: TPU (urethane), black; Locking: diecast zinc, nickel-plated; Tightening torque: 0.4 Nm |      |                                             |
|                                                                                                                                                                       |      |                                             |

# E12226




## Ethernet connection cable

VSTAN040ZDS0002L04STGP040--S

### Electrical connection

Cable: 2 m, PVC, green, Ø 6.5 mm, screened; PROFINET; 4 x 0.34 mm<sup>2</sup> (7 x Ø 0.25 mm )

### Connection

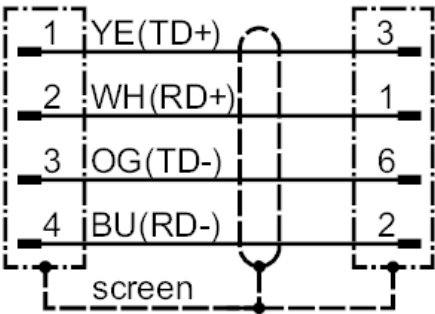

### Electrical connection - plug RJ45

Connector: 1 x RJ45, straight; Contacts: 8, gold-plated; Moulded body: PA

