


E12286



Female cordset

ADOAA030MSS0010H03

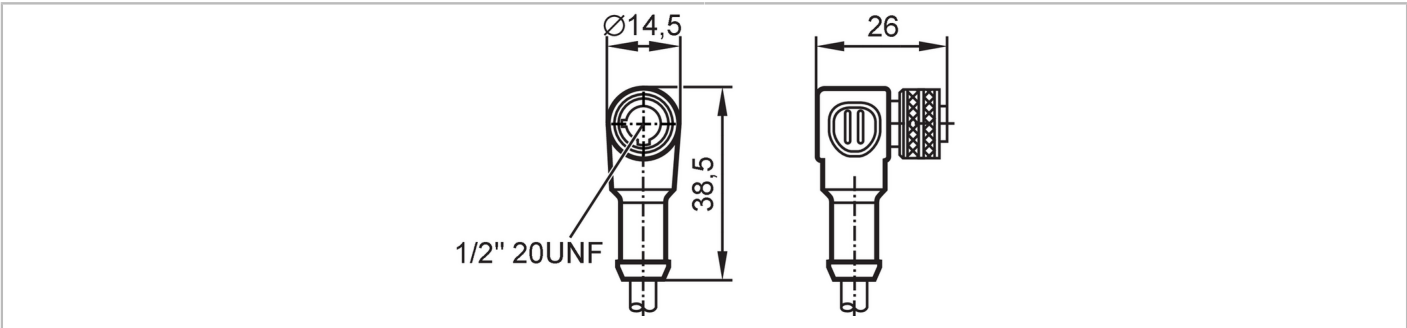

Application

Special feature	Halogen-free; Drag chain suitability
Application	Industrial applications

Electrical data

Operating voltage	[V]	< 250 AC / < 300 DC
-------------------	-----	---------------------

Operating conditions

Ambient temperature	[°C]	-25...90
Protection		IP 67

Mechanical data

Weight	[g]	386.5
Dimensions	[mm]	26 x 14.5 x 38.5
Molded-body material		TPU (urethane)
Material nut		brass, nickel-plated
Drag chain suitability		yes
Drag chain suitability	Bending radius for flexible applications	min. 10 x cable diameter
	Travel speed	max. 3.3 m/s for a horizontal travel length of 5 m and max. acceleration of 5 m/s²
	Bending cycles	> 2 Mio.
	Torsional strain	± 180 °/m

Remarks


Pack quantity	1 pcs.
---------------	--------

Electrical connection

Cable: 10 m, PUR, Halogen-free, black, Ø 5.2 mm; 3 x 0.5 mm² (64 x Ø 0.1 mm)

Electrical connection - Socket

Connector: 1 x 1/2", angled; coding: C; Contacts: 3; Moulded body: TPU (urethane), black; Locking: brass, nickel-plated; Tightening torque: ...0.6 Nm




E12286



Female cordset

ADOAA030MSS0010H03

Connection

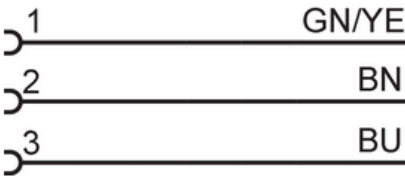

BN = Core colors :
 brown
BU = blue
GN/YE = green/yellow