


E12333



All male cordsets

ASTGH040MSS0010C04

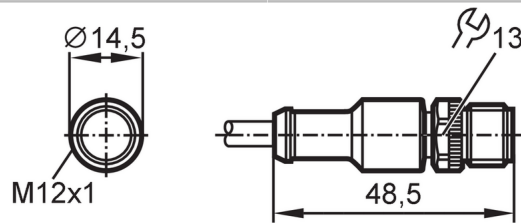

Application		
Special feature	Free from silicone; Halogen-free; gold-plated contacts; screened cable	
Application	Industrial applications	
Free from silicone	yes	
Electrical data		
Operating voltage	[V]	< 50 AC / < 60 DC
Protection class	III	
Max. current load total	[A]	4
Operating conditions		
Ambient temperature	[°C]	-25...90
Protection	IP 68	
Mechanical data		
Weight	[g]	386.2
Dimensions	[mm]	14.5 x 14.5 x 48.4
Molded-body material	PUR	
Material nut	diecast zinc, nickel-plated	
Remarks		
Pack quantity	1 pcs.	
Electrical connection		
Cable: 10 m, PUR, Halogen-free, black, Ø 5 mm, screened; 4 x 0.34 mm² (42 x Ø 0.1 mm)		
Electrical connection - plug		
Connector: 1 x M12, straight; coding: A; Contacts: 4, gold-plated; Moulded body: PUR; Locking: diecast zinc, nickel-plated; Tightening torque: 0.7...0.9 Nm; Shielded connection cable: shield not connected		
		


E12333



All male cordsets

ASTGH040MSS0010C04

Connection

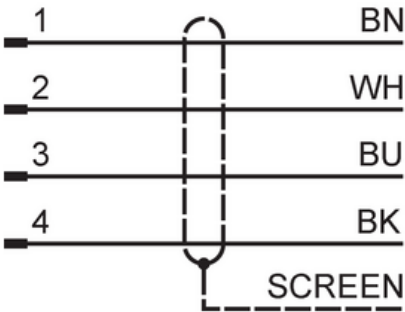

Core colors :
BK = black
BN = brown
BU = blue
WH = white