


# E12405




## Y connection cable

YDOGH050MSS0,25H04STGH050MSS

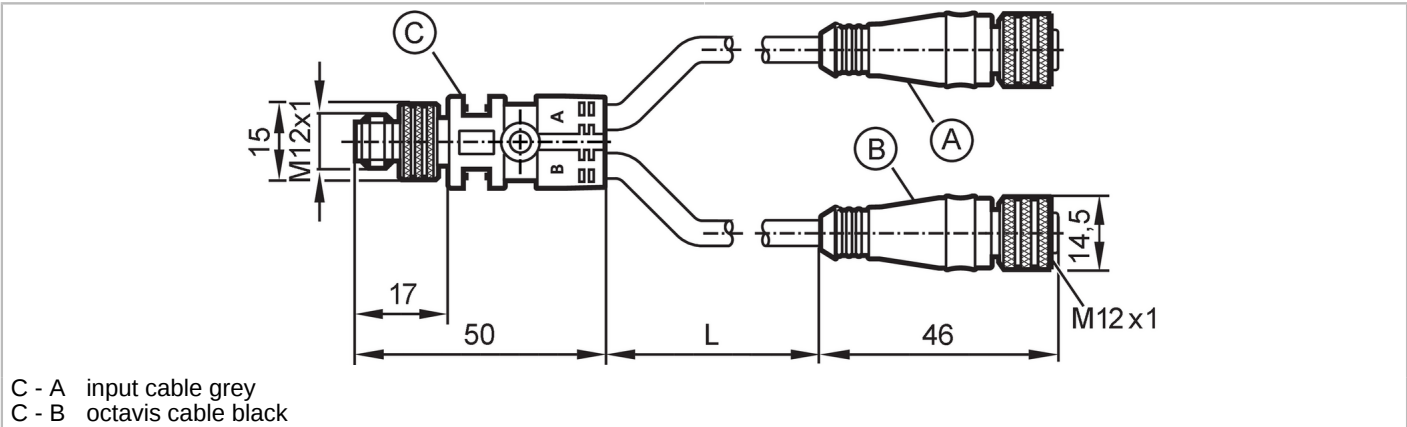

| Application                    |      |                                            |
|--------------------------------|------|--------------------------------------------|
| Special feature                |      | Halogen-free                               |
| Application                    |      | Industrial applications; Oils and coolants |
| Electrical data                |      |                                            |
| Operating voltage              | [V]  | 10...30 DC                                 |
| Max. current load total        | [A]  | 4                                          |
| Operating conditions           |      |                                            |
| Ambient temperature            | [°C] | -25...90                                   |
| Protection                     |      | IP 67                                      |
| Mechanical data                |      |                                            |
| Weight                         | [g]  | 65                                         |
| Molded-body material           |      | TPU (urethane)                             |
| Material nut                   |      | brass, nickel-plated                       |
| Number of ports splitter box   |      | 2                                          |
| Remarks                        |      |                                            |
| Pack quantity                  |      | 1 pcs.                                     |
| Electrical connection - plug C |      |                                            |

Connector: 1 x M12, straight; coding: A; Contacts: 5; Moulded body: TPU (urethane); Locking: brass, nickel-plated




# E12405



## Y connection cable

YDOGH050MSS0,25H04STGH050MSS


### Connection

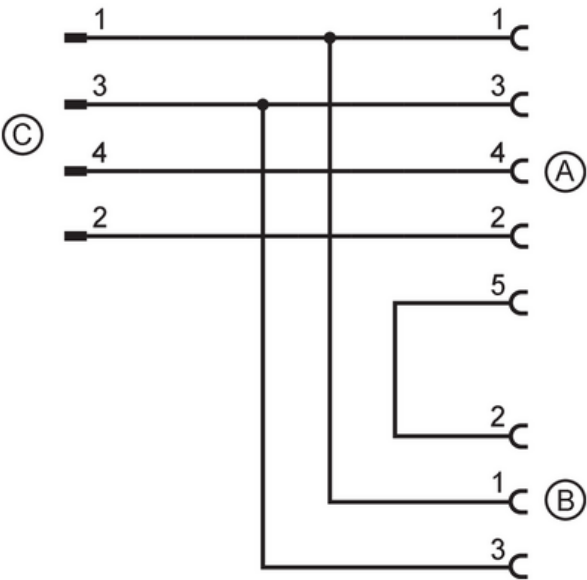

### Electrical connection - Socket A

Cable: 0.25 m, PUR, Halogen-free, black, Ø 5.0 mm; 5 x 0.25 mm<sup>2</sup> (32 x Ø 0.1 mm )

Connector: 1 x M12, straight; coding: A; Contacts: 5; Moulded body: TPU (urethane); Locking: brass, nickel-plated



### Electrical connection - Socket B

Cable: 0.25 m, PUR, Halogen-free, black, Ø 5.0 mm; 5 x 0.25 mm<sup>2</sup> (32 x Ø 0.1 mm )

Connector: 1 x M12, straight; coding: A; Contacts: 3; Moulded body: TPU (urethane); Locking: brass, nickel-plated

