


E12460



Connection cable


ADOGH080MSS00,3K05STGK120MSS

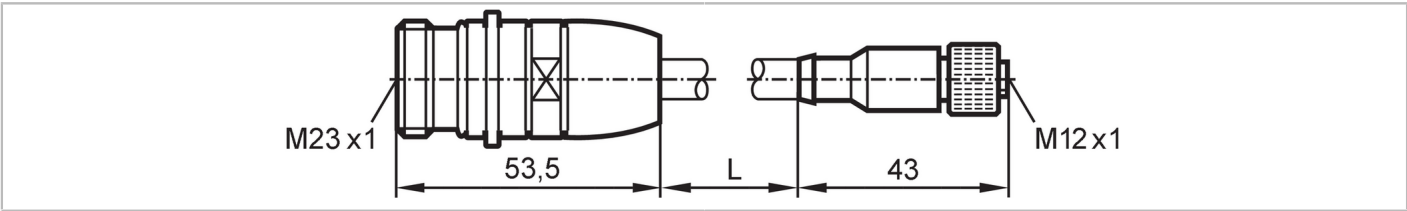

Application		
Special feature		gold-plated contacts; screened cable
Application		Industrial applications
Electrical data		
Operating voltage	[V]	< 30 AC / < 36 DC
Operating conditions		
Ambient temperature	[°C]	-20...90
Protection		IP 67
Mechanical data		
Weight	[g]	111.4
Molded-body material		brass, nickel-plated / TPU (urethane)
Material nut		brass, nickel-plated
Remarks		
Pack quantity		1 pcs.

Electrical connection - plug

Connector: 1 x M23, straight; Contacts: 12, gold-plated; Moulded body: brass, nickel-plated; Locking: brass, nickel-plated; Shielded connection cable: shield connected



E12460




Connection cable

ADOGH080MSS00,3K05STGK120MSS

Electrical connection

Cable: 0.3 m, PUR, black, Ø 6 mm, screened; 8 x 0.25 mm²

Connection

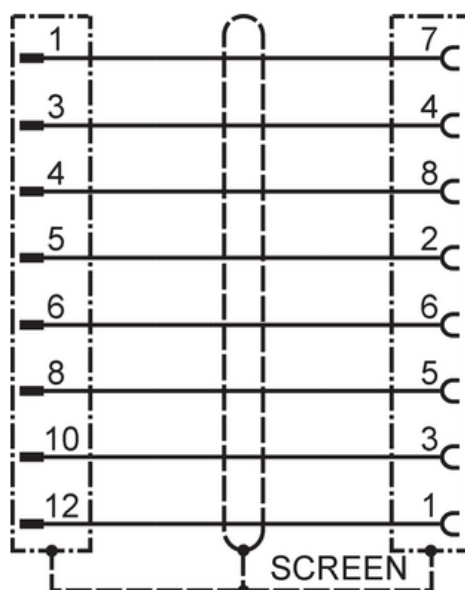

Electrical connection - Socket

Connector: 1 x M12, straight; coding: A; Contacts: 8, gold-plated; Moulded body: TPU (urethane), black; Locking: brass, nickel-plated; Shielded connection cable: shield connected

