


E12500



Wirable plug

SSTGH040ZDSFKG

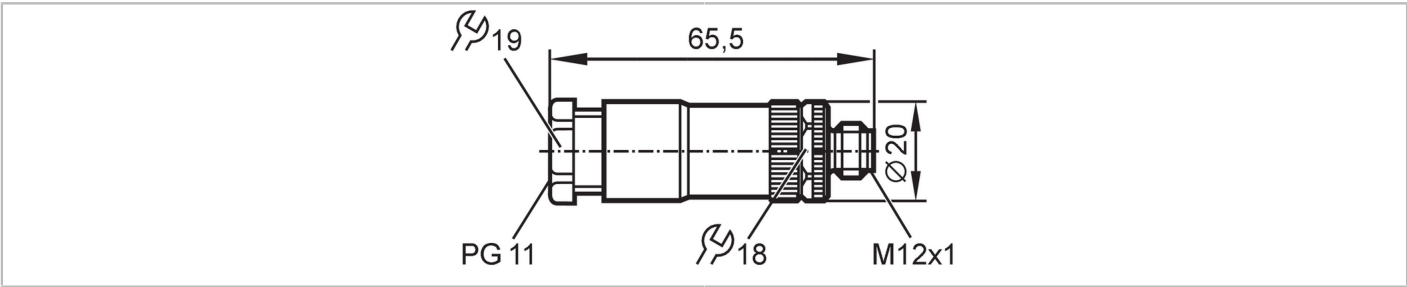

Application	
Special feature	Free from silicone; gold-plated contacts
Design	Power cable, T-coded
Application	Industrial applications
Free from silicone	yes

Electrical data	
Operating voltage [V]	< 60 DC
Max. current load total [A]	12; (when using conductors with 1.5 mm²)


Operating conditions	
Ambient temperature [°C]	-40...85
Protection	IP 67

Mechanical data	
Weight [g]	25.7
Dimensions [mm]	20 x 20 x 65.5
Molded-body material	PA
Material nut	diecast zinc
Sealing material	NBR

Remarks	
Pack quantity	1 pcs.

Electrical connection	
screw terminals: 0.75...1.5 mm²; Cable sheath: Ø 8...10 mm	

Electrical connection - plug	
Connector: 1 x M12, straight; coding: T; Contacts: 4, gold-plated; Moulded body: PA; Locking: diecast zinc; sealing: NBR; Tightening torque: 0.4 Nm	



Connection	
1	
2	
3	
4	