


E12613



Connection cable

ASTGH030MSS00,5H03

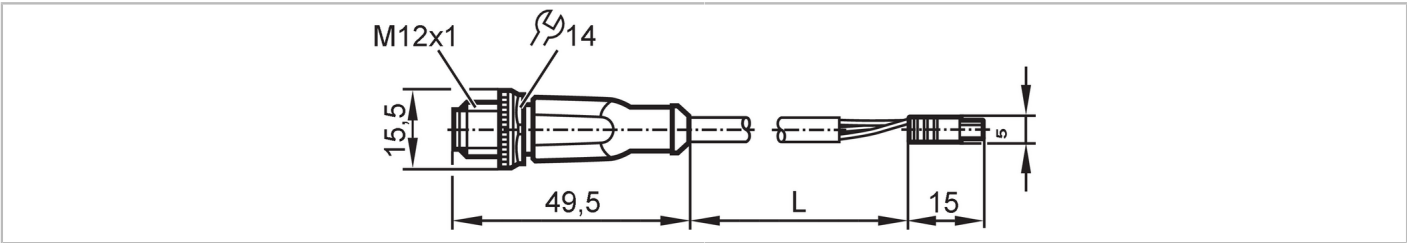

Application		
Special feature		Free from silicone; Halogen-free
Application		Industrial applications
Free from silicone		yes
Electrical data		
Operating voltage	[V]	< 50 AC/DC
Protection class		II
Max. current load total	[A]	4
Operating conditions		
Ambient temperature	[°C]	-25...90
Ambient temperature (moving)	[°C]	-25...90
Protection		IP 65
Mechanical data		
Weight	[g]	30.5
Molded-body material		TPU (urethane)
Material nut		brass, nickel-plated
Tightening torque	[Nm]	0.6...1.5
Remarks		
Pack quantity		1 pcs.

Electrical connection - plug


Connector: 1 x, straight; coding: A; Moulded body: TPU (urethane), orange; Locking: brass, nickel-plated



Electrical connection

Cable: 0.5 m, PUR, Halogen-free, black, Ø 4.9 mm; 4 x 0.34 mm² (42 x Ø 0.1 mm)

Connection

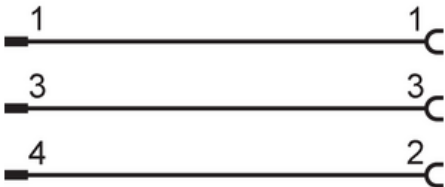

E12613



Connection cable

ASTGH030MSS00,5H03

Electrical connection - plug

