


# E12732



## All male cordsets

ASTGH080VAS0010G08

For 8-wire cordsets the core colors are not standardized.  
Please note the wiring of the sensor and the cordsets (see data sheet).

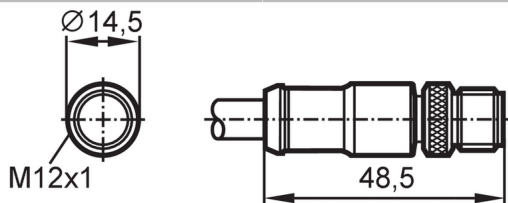

### Application

|                 |                                             |
|-----------------|---------------------------------------------|
| Special feature | screened cable                              |
| Application     | sanitary and wet areas in the food industry |

### Electrical data

|                   |     |                   |
|-------------------|-----|-------------------|
| Operating voltage | [V] | < 30 AC / < 36 DC |
| Protection class  |     | III               |

### Operating conditions

|                     |      |          |
|---------------------|------|----------|
| Ambient temperature | [°C] | -25...80 |
| Protection          |      | IP 67    |

### Mechanical data

|                      |      |                  |
|----------------------|------|------------------|
| Weight               | [g]  | 678.9            |
| Dimensions           | [mm] | 26.5 x 15 x 38.5 |
| Molded-body material |      | PVC              |
| Material nut         |      | stainless steel  |

### Remarks


|               |        |
|---------------|--------|
| Pack quantity | 1 pcs. |
|---------------|--------|

### Electrical connection

Cable: 10 m, PVC, orange, Ø 6.6 mm, screened; 8 x 0.25 mm<sup>2</sup> (14 x Ø 0.15 mm )

### Electrical connection - plug

Connector: 1 x M12, straight; coding: A; Contacts: 8; Moulded body: PVC, black; Locking: stainless steel; Tightening torque: 0.7...0.9 Nm; Shielded connection cable: shield connected



# E12732



## All male cordsets

ASTGH080VAS0010G08

### Connection



Colors to DIN 47100  
Core colors :

BN = brown  
BU = blue  
GN = green  
GY = grey  
PK = pink  
RD = red  
WH = white  
YE = yellow  
screen = screen