


E12787



Y/T splitter

ZDO2E030MSS0000-00STGE030MSS

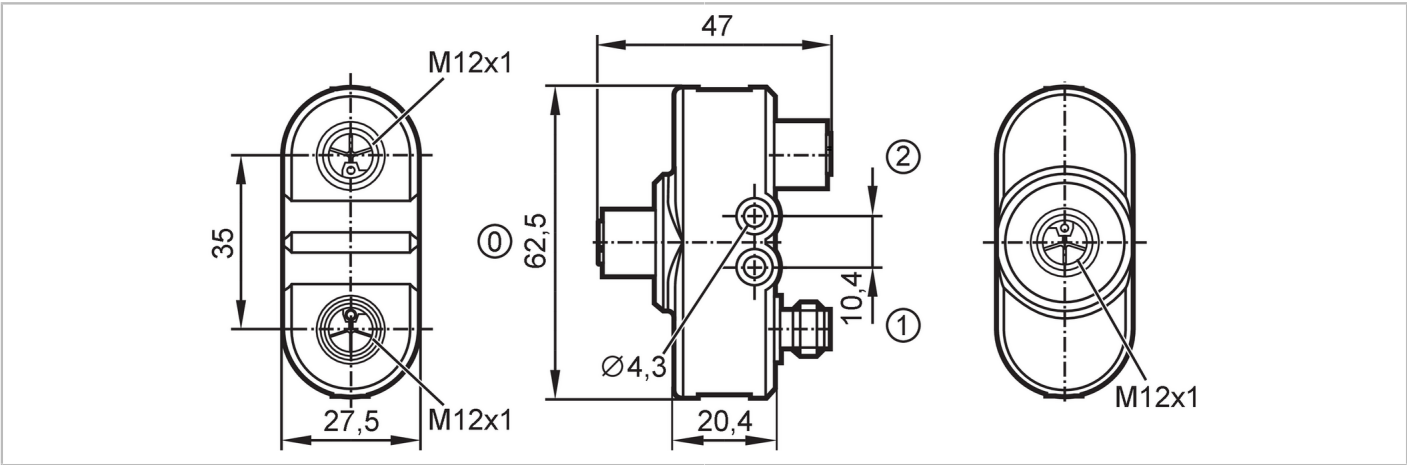

Application		
Special feature		gold-plated contacts
Application		Industrial applications; actuator supply (UA) branching
Electrical data		
Operating voltage	[V]	< 63 DC
Protection class		III
Max. current load total	[A]	16; (40 °C)
Operating conditions		
Ambient temperature	[°C]	-40...85
Protection		IP 65
Mechanical data		
Weight	[g]	99.35
Molded-body material		PBT
Material nut		brass, nickel-plated
Sealing material		HNBR
Accessories		
Items supplied		labels: 2
Remarks		
Pack quantity		1 pcs.

Electrical connection - Socket

Connector: 2 x M12; coding: L; Contacts: 5, gold-plated; Moulded body: PBT, black; Locking: brass, nickel-plated; sealing: HNBR



Electrical connection - plug

Connector: 1 x M12; coding: L; Contacts: 5, gold-plated; Moulded body: PBT, black; Locking: brass, nickel-plated



E12787



Y/T splitter

ZDO2E030MSS0000-00STGE030MSS

Connection

