


E12789



H splitter

ZDO3E050MSS0000-00STGE050MSS

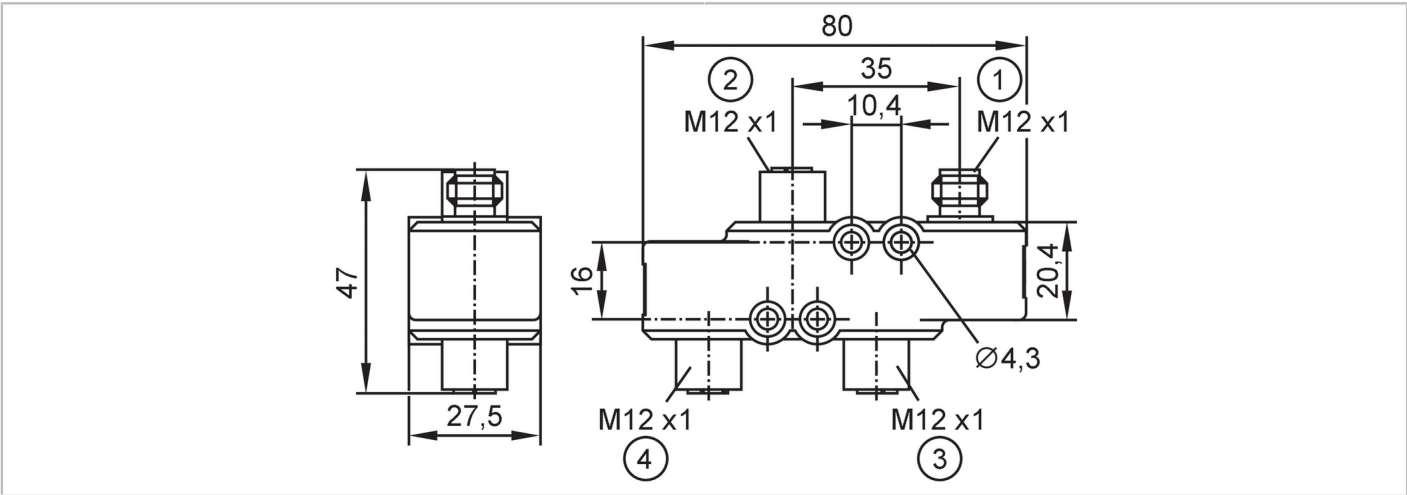

Application

Special feature	gold-plated contacts
Application	Industrial applications

Electrical data

Operating voltage	[V]	< 63 DC
Protection class		III
Max. current load total	[A]	16; (40 °C)

Operating conditions

Ambient temperature	[°C]	-40...85
Protection		IP 65

Mechanical data

Weight	[g]	130.7
Material		housing: PBT black
Material nut		brass, nickel-plated
Sealing material		HNBR

Accessories

Items supplied	labels: 2
----------------	-----------

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection - Socket

Connector: 3 x M12; coding: L; Contacts: 5, gold-plated; Locking: brass, nickel-plated; sealing: HNBR

Electrical connection - plug

Connector: 1 x M12; coding: L; Contacts: 5, gold-plated; Locking: brass, nickel-plated

E12789



H splitter

ZDO3E050MSS0000-00STGE050MSS

Connection

